




**Part Number :** [2162721060](#)

**Product Description :** SL Male-to-SL Male Off-the-Shelf (OTS) Cable Assembly, Positive Lock, Single Row, 50.00mm Length, Tin (Sn) Plating, 6 Circuits, Black

**Series Number :** 216272

**Status :** Active

**Product Category :** Power and Signal Cable Assemblies

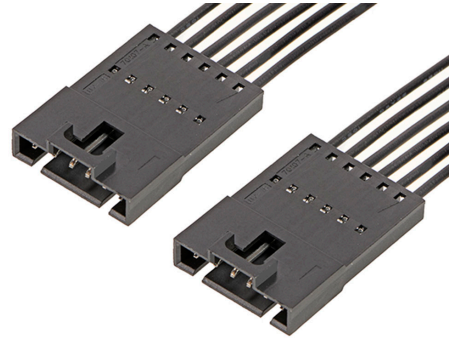

---

## Documents & Resources

### Drawings

[Drawing 2162721060\\_sd.pdf](#)


### 3D Models and Design Files

[3D Model 2162721060\\_stp.zip](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)4144-DC (27 June 2024)
EU RoHS	Compliant per EU 2015/863

### Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

### Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474

## Part Details

### General

Status	Active
Category	Power and Signal Cable Assemblies
Series	216272
Description	SL Male-to-SL Male Off-the-Shelf (OTS) Cable Assembly, Positive Lock, Single Row, 50.00mm Length, Tin (Sn) Plating, 6 Circuits, Black
Application	Signal, Wire-to-Wire
Assembly Configuration	Dual Ended Connectors
Connector to Connector	SL-to-SL
Product Family	SL Modular Connectors
Product Name	SL
Type	Discrete Wire Assembly
UPC	193264731343

### Electrical

Current - Maximum per Contact	3.0A
Voltage - Maximum	600V AC/DC

### Physical

Cable Length	50.00mm
Circuits (Loaded)	6
Circuits (maximum)	6
Color - Resin	Black
Gender	Male-Male
Lock to Mating Part	Yes
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Polyester Alloy
Net Weight	5.350/g

Number of Rows	1
Overmolded	No
Packaging Type	Bag
Pitch - Mating Interface	2.54mm
Single Ended	No
Termination Interface Style	Crimp or Compression
Wire/Cable Type	UL 11028
Wire Insulation Diameter	1.63mm max.
Wire Size (AWG)	22

---

## Mates With / Use With

### Mates with Part(s)

Description	Part Number
SL Single Row Crimp Housings and CPA Retainers	<u>70066</u>
SL Single Row Female Insulation Displacement Connector Assemblies	<u>70400</u>
SL Single Row Female Receptacles	<u>70430</u>