


Ultra precision 0.02%, 0.05%, 0.1%, 0.25%, 0.5%, tolerance Thin Film Chip Resistor

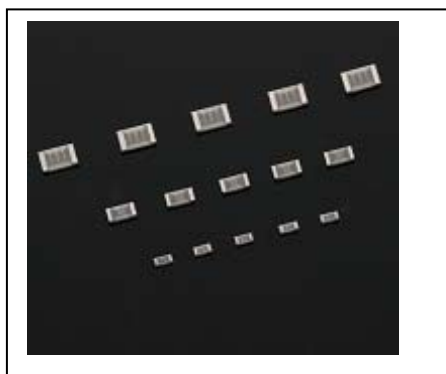

FEATURES

- High Reliability and Excellent Stability at different environmental conditions
- Low noise, THIN FILM(NiCr) construction
- EIA Standard case size(0402, 0603, 0805, 1206)
- RoHS Compliance and 100% Lead-Free (Matte Sn termination finished)

APPLICATIONS

- Automotive
- Test & Measurement
- Optical & Telecommunication
- Medical and Industrial Equipment

Electrical Specification


Type	Size	Power Rating ar 85 °C			Resistance Tolerance (Code)	Resistance Range (ohm)	Temperature Coefficient (Code)		Max. operating Voltage	Resistance Values (E-series)
		Low (ultra precision)	Regular	High			(ohm)	(ppm/°C)		
RG1005	0402	0.032W	0.063W	0.125W	±0.5% (D)	10-100K	10-46.4	100(R)	25V	E-24, E-96
							47-100K	25(P), 10(N)		
							100-2.94K	5(V)		
					±0.25% (C)	47-100K	47-100K	25(P), 10(N)		
							100-2.94K	5(V)		
							47-100K	25(P), 10(N)		
							100-2.94K	5(V)		
							47-100K	25(P), 10(N)		
±0.1% (B)	47-100K	100-2.94K	5(V)							
±0.05% (W)		100-2.94K	5(V)							
±0.02% (V)	100-2.94K	100-2.94K	25(P), 10(N), 5(V)							
RG1608	0603	0.063W	0.1W	0.166W	±0.5% (D)	10-360K	10-46.4	50(Q)	75V	E-24, E-96
							47-360K	25(P)		
							47-274K	10(N)		
							100-4.99K	5(V)		
					±0.25% (C)	47-274K	47-274K	25(P), 10(N)		
							100-4.99K	5(V)		
					±0.1% (B)	47-332K	47-332K	25(P)		
							47-274K	10(N)		
							100-4.99K	5(V)		
							47-332K	25(P)		
					±0.05% (W)	47-332K	47-274K	10(N)		
							100-4.99K	5(V)		
100-4.99K	25(P), 10(N), 5(V)									
±0.02% (V)	100-4.99K	100-4.99K	25(P), 10(N), 5(V)							
RG2012	0805	0.1W	0.125W	0.25W	±0.5% (D)	10-1M	10-46.4	50(Q)	100V	E-24, E-96
							47-1M	25(P)		
							47-475K	10(N)		
							100-10K	5(V)		
					±0.25% (C)	47-1M	47-1M	25(P), 10(N)		
							100-10K	5(V)		
					±0.1% (B)	47-1M	47-1M	25(P)		
							47-475K	10(N)		
							100-10K	5(V)		
							47-475K	25(P)		
					±0.05% (W)	47-475K	47-475K	10(N)		
							100-10K	5(V)		
100-10K	25(P), 10(N), 5(V)									
±0.02% (V)	100-10K	100-10K	25(P), 10(N), 5(V)							
RG3216	1206	0.125W	0.25W	0.25W	±0.5% (D)	47-1M	10-46.4	50(Q)	150V	E-24, E-96
							10-1M	25(P), 10(N)		
							100-33.2K	5(V)		
					±0.25% (C)	47-1M	47-1M	25(P), 10(N)		
							100-33.2K	5(V)		
					±0.1% (B)	47-1M	47-1M	25(P), 10(N)		
							100-33.2K	5(V)		
					±0.05% (W)	47-1M	47-1M	25(P), 10(N)		
							100-33.2K	5(V)		
					±0.02% (V)	100-33.2K	100-33.2K	25(P), 10(N), 5(V)		

Ultra precision 0.02%, 0.05%, 0.1%, 0.25%, 0.5%, tolerance Thin Film Chip Resistor

Performance

Item	Test Method	Specification: drift limits for each power rating						(Typical)
		Low		Regular		High		
		≤47Ω	≥47Ω	≤47Ω	≥47Ω	≤47Ω	≥47Ω	
Short time Overload	Applied voltage : 2.5 times. Test duration: 5 seconds. (When maximum operating voltage: 2 times or less)	±0.10%	±0.05%	±0.10%	±0.05%	—	±0.10%	±(0.01%)
Load Life	Test temperature : 85℃ (When high voltage : 70℃). Applied voltage : rated voltage. Repeat 1000 hours as follow : 90 mins on/30mins off.	±0.25%	±0.10%	±0.50%	±0.25%	—	±0.50%	±(0.01%)
Moisture load life	Test condition: 85℃, 85% RH. Applied power : 1/10 rated power. Repeat 1000 hours as follow : 90 mins on/30mins off.	±0.25%	±0.10%	±0.50%	±0.25%	—	±0.50%	±(0.05%)
Temperature Cycle	Repeat 1000 cycle as follow : —55℃ (30 min.)/Room Temp.(2 min.) / +125℃ (30min.)/Room Temp.(2min.)	±0.25%	±0.10%	±0.25%	±0.10%	—	±0.10%	±(0.01%)
High temperature Exposure	+155℃ for 1000 hours with no load	±0.25%	±0.10%	±0.25%	±0.10%	—	±0.10%	±(0.01%)

Dimensions & Footprints

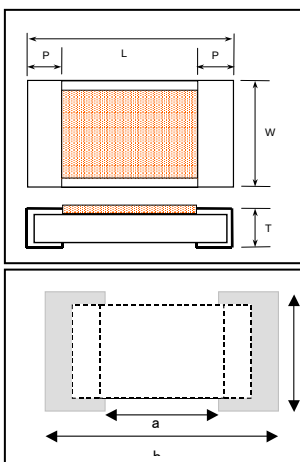


Dimensions inch (mm)				
	L	W	P	T
R G 1005	.040 ± .002 (1.0 ± 0.05)	.020 ± .002 (0.5 ± 0.05)	.008 ± .004 (0.2 ± 0.1)	.014 ± .002 (0.35 ± 0.05)
R G 1608	.063 ± .008 (1.6 ± 0.2)	.031 ± .008 (0.8 ± 0.2)	.012 ± .008 (0.3 ± 0.2)	0.016 ± .004 (0.4 ± 0.1)
R G 2012	.079 ± .008 (2.0 ± 0.2)	.049 ± .008 (1.25 ± 0.2)	.016 ± .008 (0.4 ± 0.2)	0.016 ± .004 (0.4 ± 0.1)
R G 3216	.126 ± .008 (3.2 ± 0.2)	.063 ± .008 (1.6 ± 0.2)	.02 ± .01 (0.5 ± 0.25)	0.016 ± .004 (0.4 ± 0.1)


Dimensions (mm)			
	a	b	c
R G 1005	0.5	1.6	0.6
R G 1608	1.0	3.0	1.2
R G 2012	1.2	4.0	1.7
R G 3216	2.0	5.0	2.0

Power Derating Curve

For operation above 85degC, power rating must be derated according to the following chart

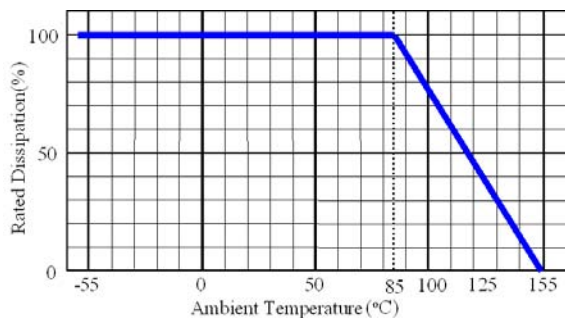

Recommended Reflow Curve

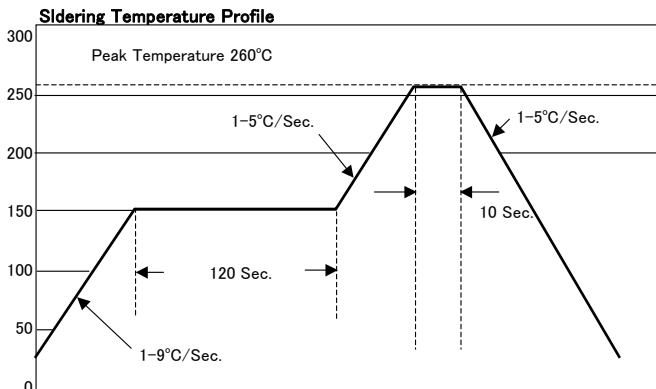


Ordering information

RG	1608	N	-	104	-	W	-	T5
TYPE	Size	TCR		R-Values		Tolerance		Package
	1005 1608 2012 3216	V=5ppm/°C N=10ppm/°C P=25ppm/°C Q=50ppm/°C R=100ppm/°C		3 digits for E24 series (Ex.104=100K ohm) 4 digits for E96 series (Ex.4992=49.9K ohm)		P=0.02% W=0.05% B=0.1% C=0.25% D=0.5%		T1=1000 T5=5000


Ultra precision 0.02%, 0.05%, 0.1%, 0.25%, 0.5%, tolerance
Thin Film Chip Resistor

Reliability Test Data


●Moisture and life test (THB 85°C 85%)

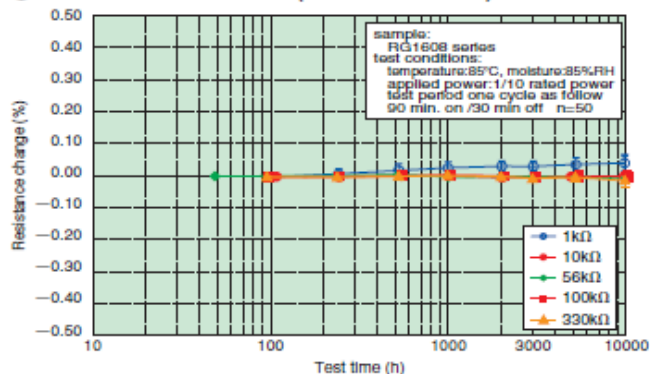


●Load life test (85°C)

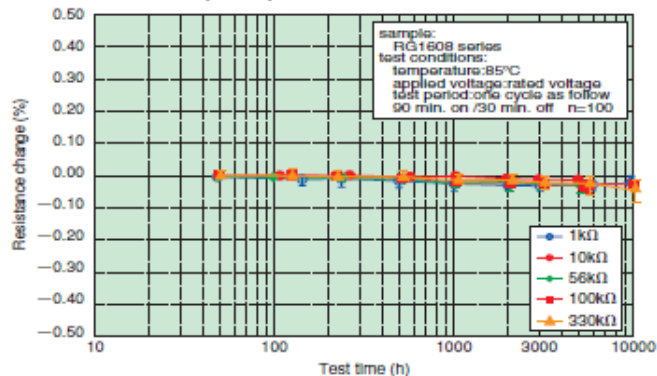

●Temperature cycle test


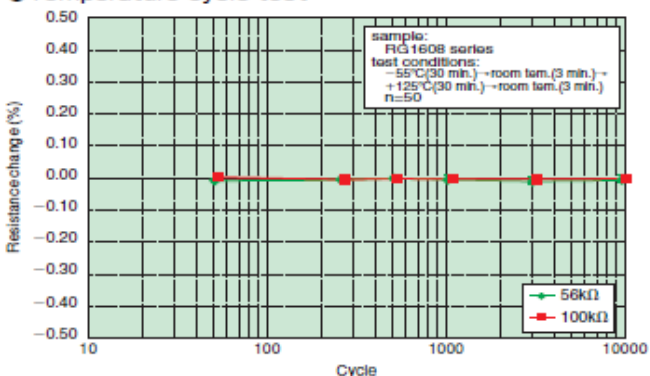


●High temperature expose test (155°C)

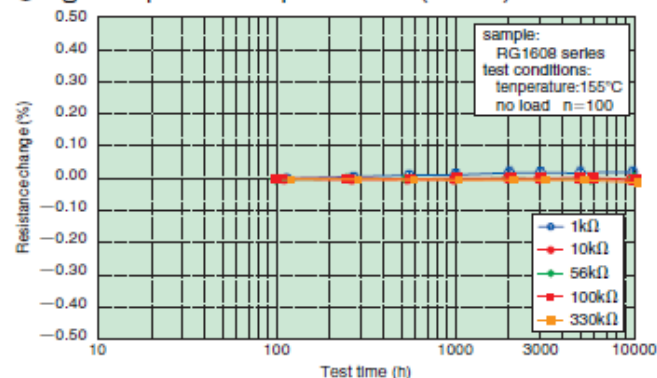

Tape & Reel Dimensions (mm)

Type	A	B	E	F	W	P ₀	P ₁	P ₂	t ₁
RG1005	0.63 ± 0.05	1.13 ± 0.05	1.75 ± 0.1	3.5 ± 0.05	8.0 ± 0.3	4.0 ± 0.1	2.0 ± 0.05	2.0 ± 0.05	0.43 ± 0.05
RG1608	1.1 ± 0.1	1.9 ± 0.1					4.0 ± 0.1		0.6 ± 0.05
RG2012	1.65 ± 0.2	2.4 ± 0.2							0.75 ± 0.05
RG3216	1.9 ± 0.1	3.5 ± 0.1							1.0 ± 0.2

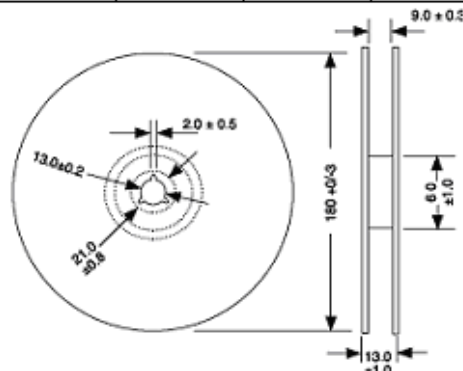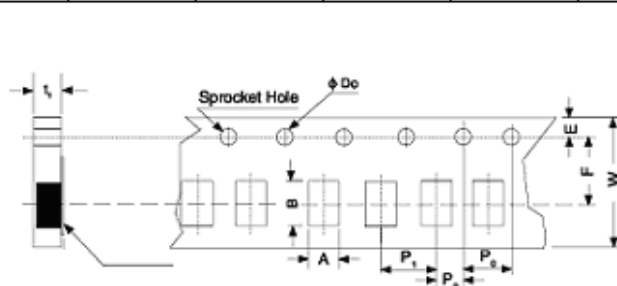

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Susumu:

[RG1005P-60R4-C-T10](#) [RG1005P-6190-C-T10](#) [RG1005P-6191-C-T10](#) [RG1005P-6192-C-T10](#) [RG1005P-61R9-C-T10](#)
[RG1005P-620-C-T10](#) [RG1005P-621-C-T10](#) [RG1005P-622-C-T10](#) [RG1005P-623-C-T10](#) [RG1005P-6340-C-T10](#)
[RG1005P-6341-C-T10](#) [RG1005P-6342-C-T10](#) [RG1005P-63R4-C-T10](#) [RG1005P-6490-C-T10](#) [RG1005P-6491-C-T10](#)
[RG1005P-6492-C-T10](#) [RG1005P-64R9-C-T10](#) [RG1005P-6650-C-T10](#) [RG1005P-6651-C-T10](#) [RG1005P-6652-C-T10](#)
[RG1005P-66R5-C-T10](#) [RG1005P-680-C-T10](#) [RG1005P-6810-C-T10](#) [RG1005P-6811-C-T10](#) [RG1005P-6812-C-T10](#)
[RG1005P-681-C-T10](#) [RG1005P-682-C-T10](#) [RG1005P-683-C-T10](#) [RG1005P-68R1-C-T10](#) [RG1005P-6980-C-T10](#)
[RG1005P-6981-C-T10](#) [RG1005P-6982-C-T10](#) [RG1005P-69R8-C-T10](#) [RG1005P-7150-C-T10](#) [RG1005P-7151-C-T10](#)
[RG1005P-7152-C-T10](#) [RG1005P-71R5-C-T10](#) [RG1005P-7320-C-T10](#) [RG1005P-7321-C-T10](#) [RG1005P-7322-C-T10](#)
[RG1005P-73R2-C-T10](#) [RG1005P-750-C-T10](#) [RG1005P-751-C-T10](#) [RG1005P-752-C-T10](#) [RG1005P-753-C-T10](#)
[RG1005P-7680-C-T10](#) [RG1005P-7681-C-T10](#) [RG1005P-7682-C-T10](#) [RG1005P-76R8-C-T10](#) [RG1005P-7870-C-T10](#)
[RG1005P-7871-C-T10](#) [RG1005P-7872-C-T10](#) [RG1005P-78R7-C-T10](#) [RG1005P-8060-C-T10](#) [RG1005P-8061-C-T10](#)
[RG1005P-8062-C-T10](#) [RG1005P-80R6-C-T10](#) [RG1005P-820-C-T10](#) [RG1005P-821-C-T10](#) [RG1005P-822-C-T10](#)
[RG1005P-823-C-T10](#) [RG1005P-8250-C-T10](#) [RG1005P-8251-C-T10](#) [RG1005P-8252-C-T10](#) [RG1005P-82R5-C-T10](#)
[RG1005P-8450-C-T10](#) [RG1005P-8451-C-T10](#) [RG1005P-8452-C-T10](#) [RG1005P-84R5-C-T10](#) [RG1005P-8660-C-T10](#)
[RG1005P-8661-C-T10](#) [RG1005P-8662-C-T10](#) [RG1005P-86R6-C-T10](#) [RG1005P-8870-C-T10](#) [RG1005P-8871-C-T10](#)
[RG1005P-8872-C-T10](#) [RG1005P-88R7-C-T10](#) [RG1005P-9090-C-T10](#) [RG1005P-9091-C-T10](#) [RG1005P-9092-C-T10](#)
[RG1005P-90R9-C-T10](#) [RG1005P-910-C-T10](#) [RG1005P-911-C-T10](#) [RG1005P-912-C-T10](#) [RG1005P-913-C-T10](#)
[RG1005P-9310-C-T10](#) [RG1005P-9311-C-T10](#) [RG1005P-9312-C-T10](#) [RG1005P-93R1-C-T10](#) [RG1005P-9530-C-T10](#)
[RG1005P-9531-C-T10](#) [RG1005P-9532-C-T10](#) [RG1005P-95R3-C-T10](#) [RG1005P-9760-C-T10](#) [RG1005P-9761-C-T10](#)
[RG1005P-9762-C-T10](#) [RG1005P-97R6-C-T10](#) [RG1005V-101-C-T10](#) [RG1005V-1020-C-T10](#) [RG1005V-1021-C-T10](#)