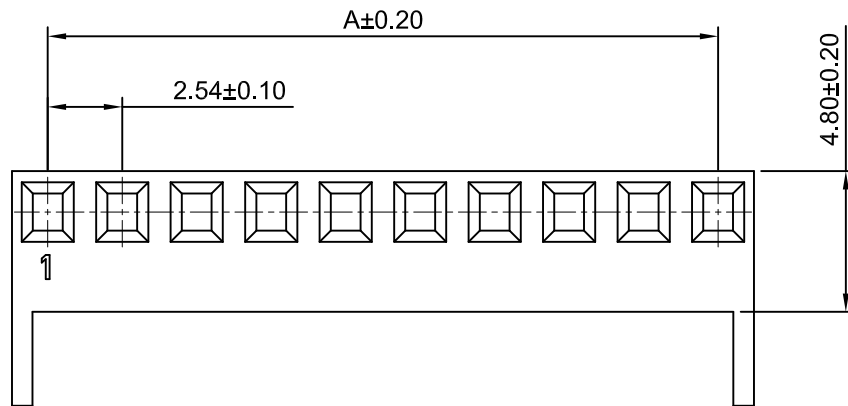




P.C.B LAYOUT
TOLERANCE:±0.05

SPECIFICATIONS:

Current Rating: 2.5A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Matte Tin over Nickel
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		Part NO.	Dimensions(mm)	
	A	B		A	B
2P	2.54	5.10	16P	38.10	40.66
3P	5.08	7.64	17P	40.64	43.20
4P	7.62	10.18	18P	43.18	45.74
5P	10.16	12.72	19P	45.72	48.28
6P	12.70	15.26	20P	48.26	50.82
7P	15.24	17.80	21P	50.80	53.36
8P	17.78	20.34	22P	53.34	55.90
9P	20.32	22.88	23P	55.88	58.44
10P	22.86	25.42	24P	58.42	60.98
11P	25.40	27.96	25P	60.96	63.52
12P	27.94	30.50	26P	63.50	66.06
13P	30.48	33.04	27P	66.04	68.60
14P	33.02	35.58	28P	68.58	71.14
15P	35.56	38.12	29P	71.12	73.68

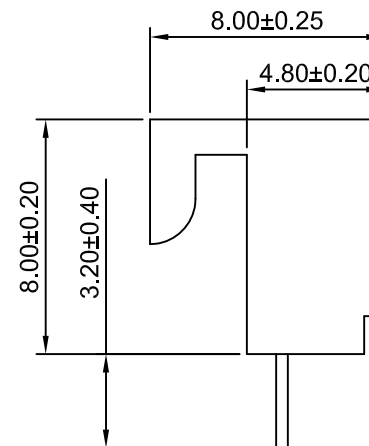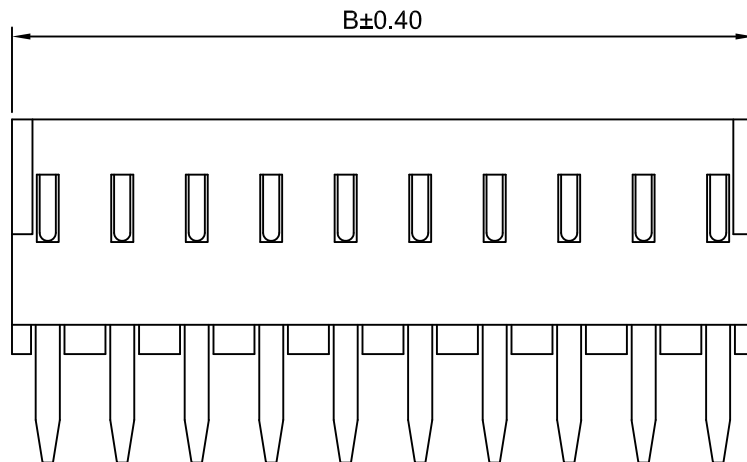

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	2.54mm PITCH BOTTOM ENTRY HOUSING						
mm	4:1	1 of 1							
DRWN	CHKD	APPR	DRAWING NO. B2541CW-XP						
Haisen Li	Diankui Wan	Jack Yin							
General Tolerances x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			THIRD ANGLE PROJECTION						
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">A0</td> <td style="width: 40%;">NEW RELEASE</td> <td style="width: 50%;">2010.06.10</td> </tr> <tr> <td>REV</td> <td>DESCRIPTION</td> <td>DATE</td> </tr> </table>			A0	NEW RELEASE	2010.06.10	REV	DESCRIPTION	DATE	REV A0
A0	NEW RELEASE	2010.06.10							
REV	DESCRIPTION	DATE							