
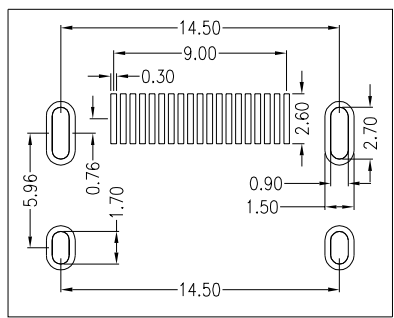
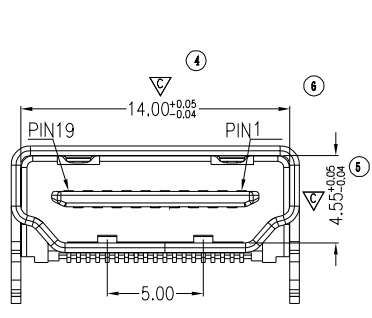
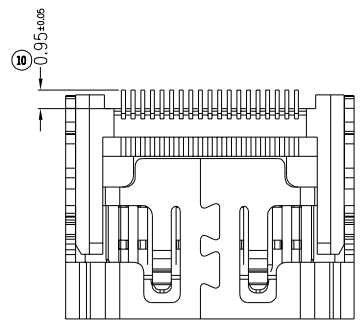
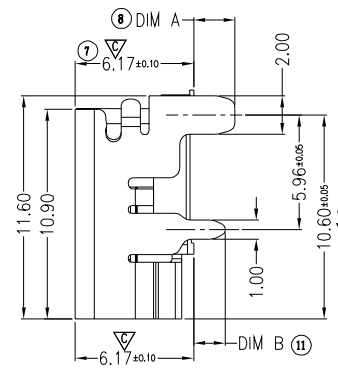

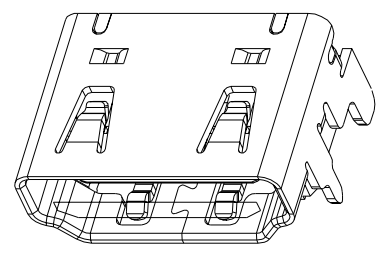
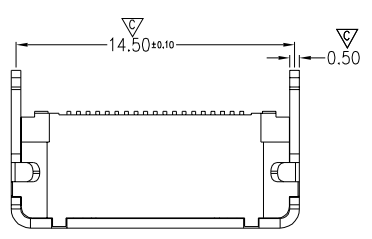




RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

NOTES:

- 1.MATERIAL:
HOUSING:LCP,BK,UL94V-0
SHELL: T=0.50mm
TERMINAL: BRASS, T=0.20mm
2. CONTACT PLATING:
NICKEL UNDERPLATING OVER ALL
GOLD PLATING AT CONTACT AREA
TIN AT SOLDERING AREA
3. SHELL PLATING: NICKEL 50u" MIN
4. PACKAGING SPECIFICATION:RELL
5. TERMINAL SOLDER-TAIL COPLANARITY 0.10MM MAX
6. CONTROL DIMENSIONS INDICATED FROM "▼"
- 7.ELECTRICAL:
INSULATION RESISTANCE: 100M ohm MIN.
CONTACT RESISTANCE: 30m ohm MAX.
DIELECTRIC WITHSTANDING: 500 VAC FOR 1 MINUTE
CURRENT RATING: 0.5A.
VOLTAGE RATING: 40V AC
8. MECHANICAL
INSERTION FORCE:4.5Kgf MAX
WITHDRAWAL FORCE:1.0~4.0Kgf

 深圳市万骏达电子有限公司 http://www.wanjunda.com		图号 (DWG NO)		单位(UNIT): MM
		本 (REV)		比例(SCALE) 1:1
品名 (ITEM NO)	HDMI A TYPE MODEL 无LOGO	日期 (DATE)		
料号 (PART NO)	HDMI-AF-WT-02	设计 (DESIGN)		未注公差 TOLERANCE UNSPECIFIED
模号 (MODEL NO)		审核 (CHECKED)		X.X ±0.30 X.XX ±0.15 X.XXX ±0.10 X" ±5" X.X" ±2"
		核准 (APPROVED)		