


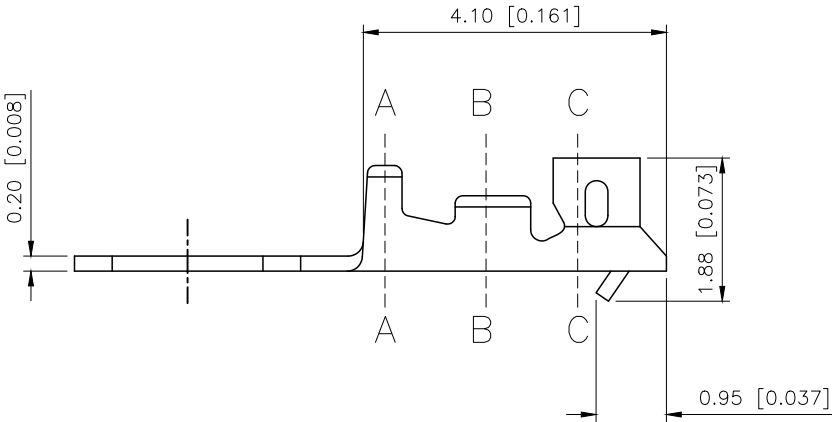


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.04	阿树




- SPECIFICATIONS
- Voltage rating:50V AC/DC
 - Current rating:1A AC/DC
 - Withstanding Voltage:500V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥500MΩ
 - Contact resistance:≤20mΩ
 - After environmental testing:≤30mΩ

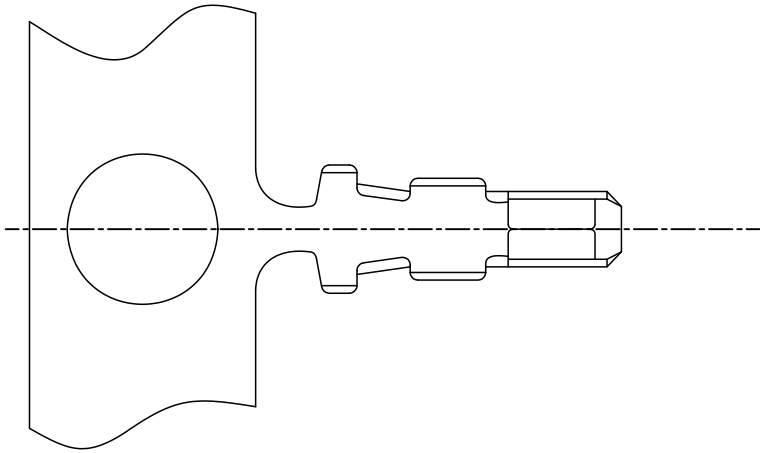

PART NO.:

X1502 T-P SN
① ② ③ ④

- ①Series No
②Category:T-Terminal
③Material:P-Phosphor bronze
④Plating style:SN-Bright tin plating



X1502T-PSN	Phosphor Bronze	AWG#26-32	1.20mm(Max)	Stamping Before Plating :30u'' Ni;70u'' Sn	X1502H
PARY NO	Matrial	Wire Range	Insulation O.D.	Finish	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 1.50mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X1502T-PSN
APPROVED		SIZE: A4	DWG NO.: