

SUMMARY

Wires

Low	0
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

Series	2M
Termination type	No contacts / Accessory
IP rating	50
Cable Ø	0.00 - 0.00 mm
Status	active
Alternative part	



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model	BGF*: Blanking cap for plugs (arctic grip)
Keying	
Housing Material	Aluminium (nickel plated, anthracite color) shell and nut, other pieces bronze/brass
Variant	
Weight	9.23 g

Performance

Configuration
Insulator
Rated Current

Others


Temp (min / max): -20° C / +200° C
Humidity (max): 21 days at 95%

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Gunfire vibration: 25 Hz - 2000 Hz, 3 axis (Apache helicopter)
Vibration-Sine: 30 g, 3 axes, 12 hr [10 Hz - 2000 Hz]
Vibration-Random: 37.8 g rms - 3 axes, 4 hr amb [50 Hz - 2000 Hz]
Shock Resistance: 300 g [3 ms]
Lighting strike EIA 364-75: 10K amps - 6 times
Thermal shock: 5 cycles: -65°C to +150°C
EMI Shielding EIA 364-66A: >= 80 dB (1 GHz), >=70 dB (3 GHz), >= 58 dB (6 GHz), >= 40 dB (10 GHz)
Salt Spray Corrosion: max. 48 hr
IP Rating: 50

DRAWINGS

Draws

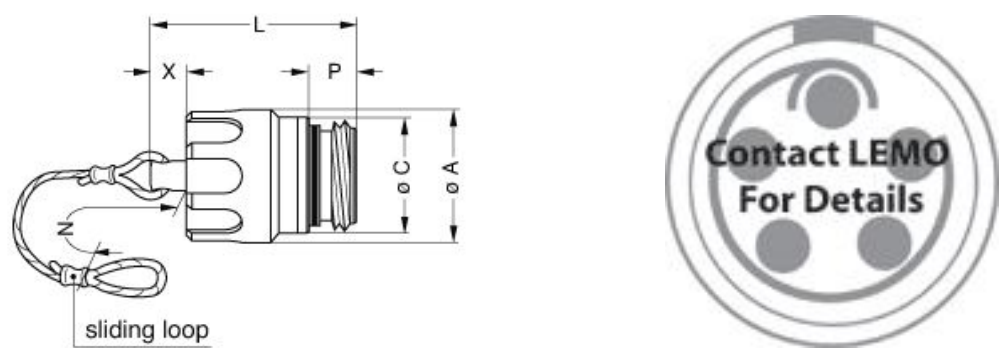

Dimensions

	A	C	L	N	P	X
mm.	18.9	17.2	24.6	85	5.3	6
in.	0,74	0,68	0,97	3,35	0,21	0,24

RECOMMENDED BY LEMO

Tools

None

Cables

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

121 221			
131 221			

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.