

D款, 正向10.6四脚, DIP-*6.20

MAPX

MODIFICATION

DATE

NOTES:

1.HOUSING: SEE NOTES,
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.

SPECIFICATION:

1.ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: 30mΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN
2.MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
5000 CYCLES MIN
5000 CYCLES EXTRACTION





FORCE: 3~35N

3.ENVIRONMENTAL:


OPERATING TEMPERATURE: -55℃+85℃

4.Contact finish:

01: Selective Gold Flash
02: Selective Gold 3U"
03: Selective Gold 5U"
04: Selective Gold 15U"
05: Selective Gold 30U"

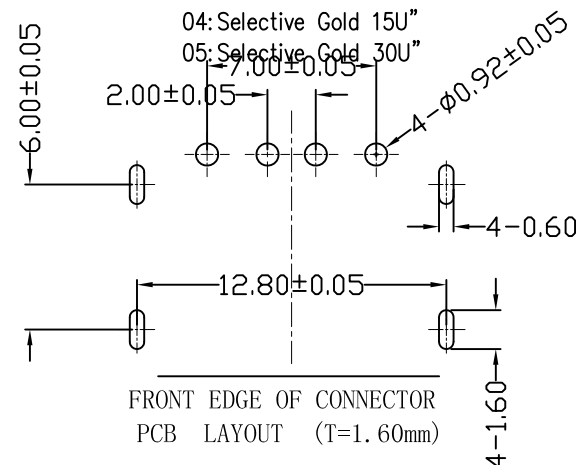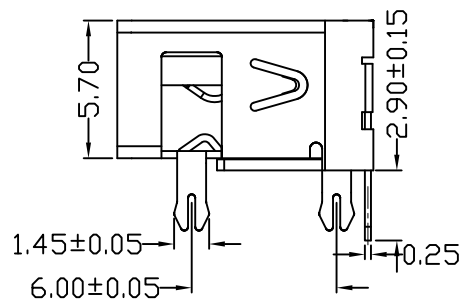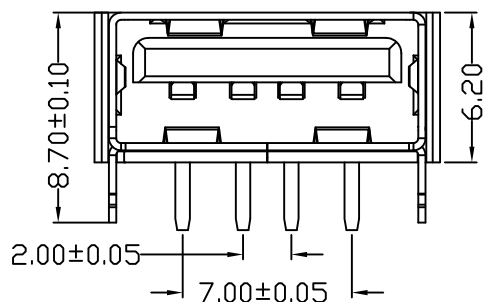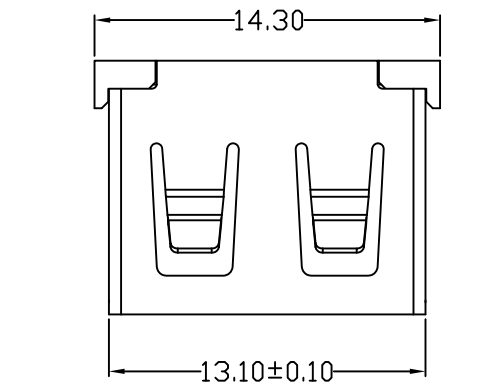

FRONT EDGE OF CONNECTOR
PCB LAYOUT (T=1.60mm)

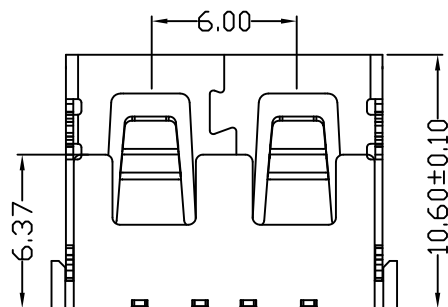

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

单位	MM	制图	Z-Y-B	制图料号	912-322A1011D10100
UNITS	MM	DRAWING	Z-Y-B	PRODUCT PART NO	
比例	1:1	审核		产品名称	AF10. 6D款四脚无边方弹铜壳PBT
SCALE	1:1	CHKD		PRODUCT NO	白胶6.2DIP
日期	2012.09.24	核准		角法	
DATE	2012.09.24	APPD		VIEW	

深圳市精拓金电子有限公司

单位

MM

制图

Z-Y-B

制图料号

912-322A1011D10100

比例

1:1

审核

产品名称

AF10. 6D款四脚无边方弹铜壳PBT

日期

2012.09.24

核准

角法

VIEW

版本

AD

DATE

2012.09.24

APPD

角法

VIEW

版本

AD