




Matched Pair, Molded, Automotive, Thin Film, SOT-23, Resistor, Surface Mount Network, AEC-Q200 Qualified



Vishay Thin Film MPMA Series dividers provide ± 2 ppm/ $^{\circ}\text{C}$ tracking and a ratio tolerance as tight as ± 0.05 %, small size, and exceptional stability for all surface mount applications. The standard SOT-23 package format with unity and common standard resistance divider ratios provide easy selection for most applications requiring matched pair resistor elements. MPMA is AEC-Q200 qualified and ideal for high precision automotive applications. The ratios listed are available for off the shelf delivery. If you require a non-standard ratio, consult the applications engineering group as we may be able to meet your requirements.

SCHEMATIC



FEATURES

- AEC-Q200 qualified
- Resistance range 250 Ω to 50 k Ω
- Excellent long term ratio stability ± 0.03 % over 1000 h, 125 $^{\circ}\text{C}$
- Ratio tolerances to ± 0.05 %
- Tracking as low as ± 2 ppm/ $^{\circ}\text{C}$
- Very low noise and voltage coefficient (< -30 dB, 0.1 ppm/V)
- Standard JEDEC TO-236 package variation AB
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



RoHS
COMPLIANT
HALOGEN
FREE

STANDARD DIVIDER RATIO (R_2/R_1)

RATIO	R_2 (Ω)	R_1 (Ω)	TCR TRACKING
50:1	50K	1K	10 ppm/ $^{\circ}\text{C}$
25:1	25K	1K	5 ppm/ $^{\circ}\text{C}$
20:1	20K	1K	
10:1	10K	1K	
9:1	9K	1K	
6:1	6K	1K	3 ppm/ $^{\circ}\text{C}$
5:1	10K	2K	
5:1	5K	1K	
4:1	8K	2K	
4:1	4K	1K	2 ppm/ $^{\circ}\text{C}$
2:1	10K	5K	
2:1	2K	1K	
1:1	50K	50K	
1:1	25K	25K	
1:1	10K	10K	
1:1	5K	5K	
1:1	2.5K	2.5K	
1:1	1K	1K	
1:1	500	500	
1:1	250	250	


STANDARD ELECTRICAL SPECIFICATIONS

TEST	SPECIFICATIONS	CONDITIONS
Material	Ta2N	-
Pin/Lead Number	3	-
Resistance Range	250 Ω to 50 k Ω per resistor	-
TCR: Absolute	± 25 ppm/ $^{\circ}\text{C}$	-55 $^{\circ}\text{C}$ to +125 $^{\circ}\text{C}$
TCR: Tracking	Down to ± 2 ppm/ $^{\circ}\text{C}$	-55 $^{\circ}\text{C}$ to +125 $^{\circ}\text{C}$
Tolerance: Absolute	± 0.1 % to ± 1.0 %	+25 $^{\circ}\text{C}$
Tolerance: Ratio	± 0.05 % to 0.5 %	+25 $^{\circ}\text{C}$
Power Rating: Resistor	100 mW	Maximum at +70 $^{\circ}\text{C}$
Power Rating: Package	200 mW	Maximum at +70 $^{\circ}\text{C}$
Stability: Absolute	< 1 k Ω : ± 0.35 %; > 1 k Ω : ± 0.04 %	1000 h at +125 $^{\circ}\text{C}$
Stability: Ratio	< 1 k Ω : ± 0.35 %; > 1 k Ω : ± 0.03 %	1000 h at +125 $^{\circ}\text{C}$
Voltage Coefficient	0.1 ppm/V	-
Working Voltage	100 V max. not to exceed $\sqrt{P \times R}$	-
Operating Temperature Range	-55 $^{\circ}\text{C}$ to +155 $^{\circ}\text{C}$	-
Storage Temperature Range	-55 $^{\circ}\text{C}$ to +155 $^{\circ}\text{C}$	-
Noise	< -30 dB	-
Thermal EMF	0.2 $\mu\text{V}/^{\circ}\text{C}$	-
Shelf Life Stability: Absolute	$\Delta R/R \pm 0.01$ %	1 year at +25 $^{\circ}\text{C}$
Shelf Life Stability: Ratio	$\Delta R/R \pm 0.002$ %	1 year at +25 $^{\circ}\text{C}$

DIMENSIONS AND IMPRINTING in inches and millimeters

DIMENSION	INCHES		MILLIMETERS	
	MIN.	MAX.	MIN.	MAX.
A	0.031	0.040	0.79	1.02
A1	0.001	0.004	0.02	0.10
B	0.105	0.120	2.67	3.05
S	0.071	0.079	1.80	2.00
W	0.015	0.021	0.38	0.54
L	0.083	0.098	2.10	2.50
H	0.047	0.055	1.20	1.40
T	0.005	0.010	0.13	0.25
J	0.0035	0.0059	0.089	0.15
K	0.017	0.022	0.44	0.55
Ø	0	8°	0	8°

MECHANICAL SPECIFICATIONS	
Resistive Element	Tantalum nitride
Substrate Material	Ceramic
Body	Molded epoxy
Terminals	Copper alloy
Lead (Pb)-free Option	Solder free leads, Ni/Pd/Au plated

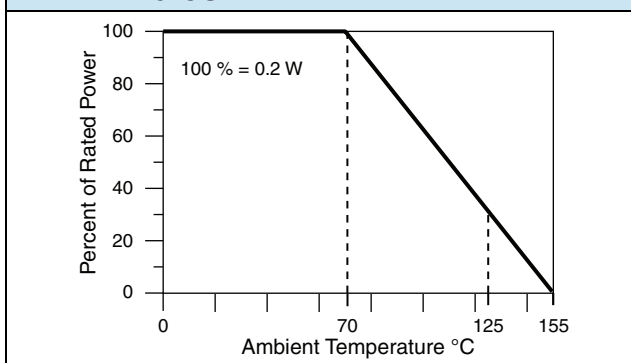DERATING CURVE

ENVIRONMENTAL TESTS

ENVIRONMENTAL TEST	CONDITIONS	SUGGESTED PRODUCT LIMITS ABS/RATIO	MAX. VALUES ABS/RATIO
High Temperature Exposure	< 1 kΩ: MIL-STD-202, 108, 1000 h at 125 °C	± 0.5 %/± 0.5 %	± 0.35 %/± 0.35 %
	> 1 kΩ: MIL-STD-202, 108, 1000 h at 125 °C	± 0.25 %/± 0.1 %	± 0.02 %/± 0.008 %
Temperature Cycling	JESD22, JA-104, 1000 cycles at -55 °C to +125 °C	± 0.25 %/± 0.1 %	± 0.1 %/± 0.027 %
Moisture Resistance	MIL-STD-202, 106	± 0.25 %/± 0.1 %	± 0.03 %/± 0.012 %
Biased Humidity	MIL-STD-202, 103, 1000 h at 85 °C, 85 % RH, 10 % P	± 1.0 %/± 0.5 %	± 0.4 %/± 0.34 %
Life	< 1 kΩ: MIL-STD-202, 108 at 125 °C, 1000 h	± 0.5 %/± 0.5 %	± 0.35 %/± 0.35 %
	> 1 kΩ: MIL-STD-202, 108 at 125 °C, 1000 h	± 0.5 %/± 0.1 %	± 0.04 %/± 0.03 %
Mechanical Shock	MIL-STD-202, 213, condition C	± 0.25 %/± 0.1 %	± 0.03 %/± 0.018 %
Vibration	MIL-STD-204, 10 Hz to 2 kHz	± 0.25 %/± 0.1 %	± 0.02 %/± 0.047 %
Resistance to Soldering Heat	MIL-STD-202, 210, condition B	± 0.25 %/± 0.1 %	± 0.13 %/± 0.24 %
Electrostatic Discharge	< 1 kΩ: AEC-Q200-002 at 500 V human body	± 0.5 %	± 0.50 %
	> 1 kΩ: AEC-Q200-002 at 1000 V human body	± 0.5 %	± 0.25 %
Solderability	J-STD-002 method B and B1	Visual	Visual
Terminal Strength	AEC-Q200-006 at 1 kg for 60 s	± 0.25 %/± 0.1 %	± 0.02 %/± 0.018 %
Flame Retardance	AEC-Q200-001 para 4.0	Visual	Visual



GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: MPMA1003AWS

M	P	M	A		1	0	0	3					A	T	1
M	P	M	A	1	0	0	1	5	0	0	1		A	T	1

GLOBAL MODEL (3 or 4 digits)	RESISTANCE (4 or 8 digits)	TOLERANCE AND RATIO TOLERANCE	PACKAGING
MPMA Ni/Pd/Au = e4 termination	First 3 digits are significant figures and the last digit specifies the number of zeros to follow. When like values are required use total resistance. When dual values are required list both values. Example: (List R ₁ first in part number with dual values) 1002 = 10K (5K/5K) 1003 = 100K (50K/50K) 10011002 = 1K/10K divider	Abs. Tol. Ratio A = 0.1 % 0.05 % B = 0.1 % 0.1 % C = 0.25 % 0.1 % D = 0.5 % 0.1 % F = 1 % 0.5 %	TAPE AND REEL T1 = 1000 min., 1000 mult ⁽¹⁾ T5 = 500 min., 500 mult TF = Full reel 4000 TP = 100 min., 1 mult (package unit single lot date code) TS = 100 min., 1 mult

Note

⁽¹⁾ Preferred packaging code



Vishay Dale Thin Film Land Patterns


1. Scope

This technical note provides sample land patterns for Vishay Dale Thin Film SMT resistive products. The following drawings are based on IPC-SM-782 Surface Mount Design and Land Pattern Standard. These drawings are for reference only. Vishay Thin Film recommends that the user contacts their PC board supplier for actual land patterns required. The pads are intended for lead (Pb)-free and tin / lead solder types.


2. Product Series

Thin Film Surface Mount Chip Resistors (FC, L, P, PTN, PLT, PLTT, PLTU, PAT, PATT, PNM, M/D55342 QPL Series)


0402 Land Pattern




0502 Land Pattern




0505 Land Pattern




0603 Land Pattern




0705 Land Pattern




1005 Land Pattern




1010 Land Pattern




1206 Land Pattern




1505 Land Pattern




2010 Land Pattern

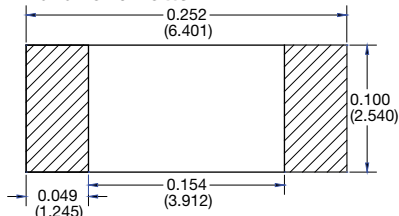

2208 Land Pattern

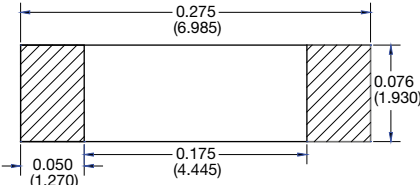


2512 Land Pattern

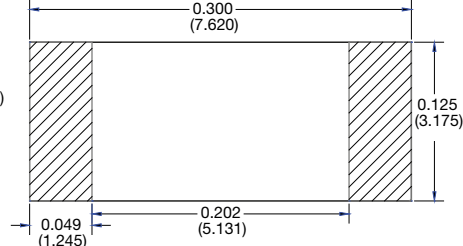




Thin Film Surface Mount Chip Resistors (PHP, PCAN Series)


0603 Land Pattern




1206 Land Pattern



0805 Land Pattern




2512 Land Pattern

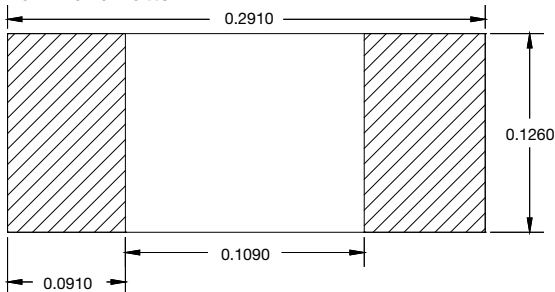


Thin Film Surface Mount Chip Resistors Long Axis Termination (L Series)


0508 Land Pattern




0612 Land Pattern



1020 Land Pattern

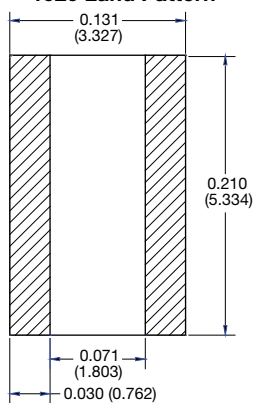


1225 Land Pattern

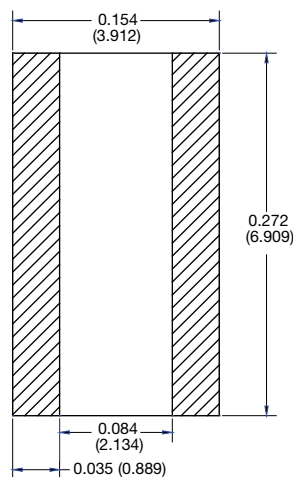




Surface Mount Networks (MPM, MP3, MP4 Series)

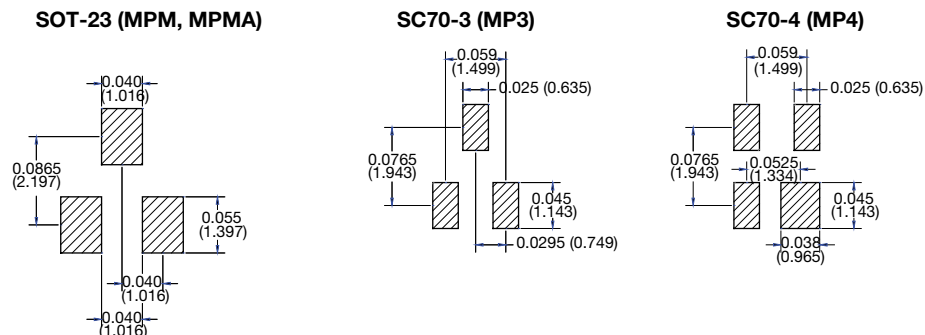


Surface Mount Networks SOIC Narrow Body 150 mils (ORN, CSO, MOMC, HTRN, AORN, MORN Series)


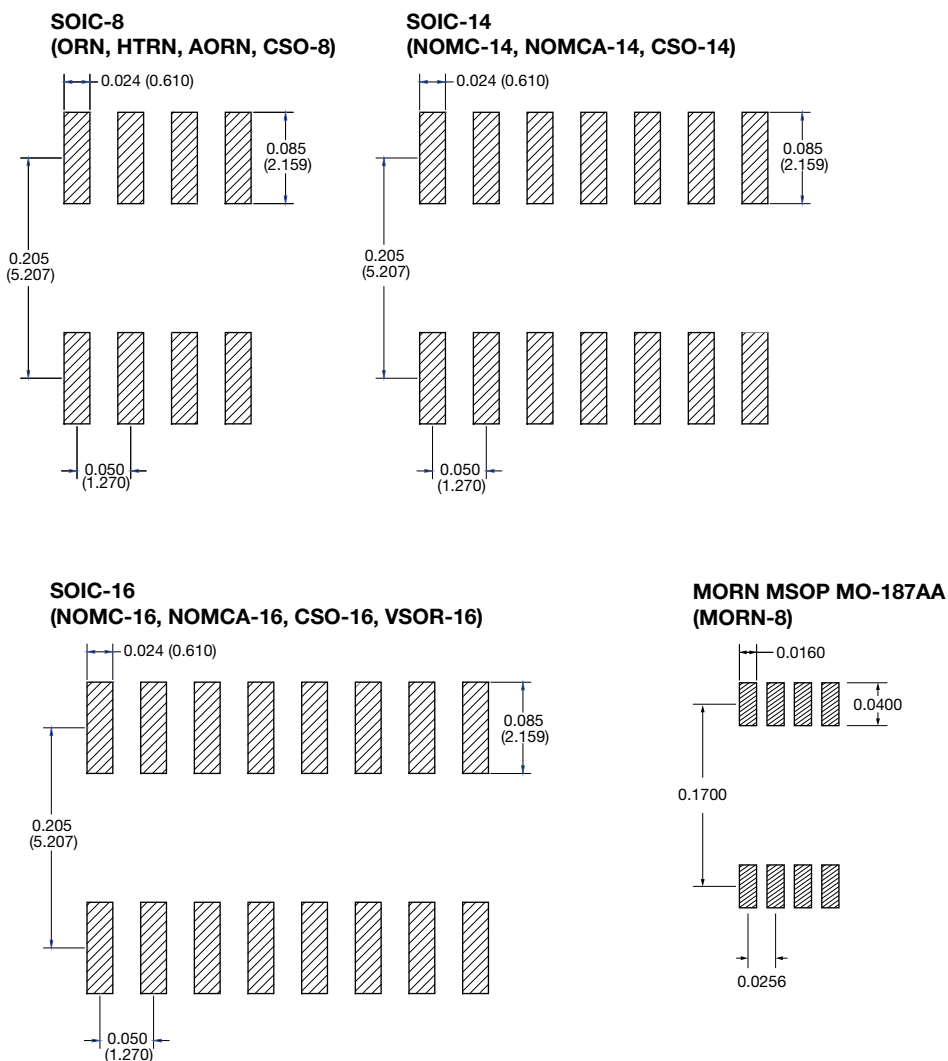




Surface Mount Networks SOIC Medium Body 220 mils (TOMC Series)

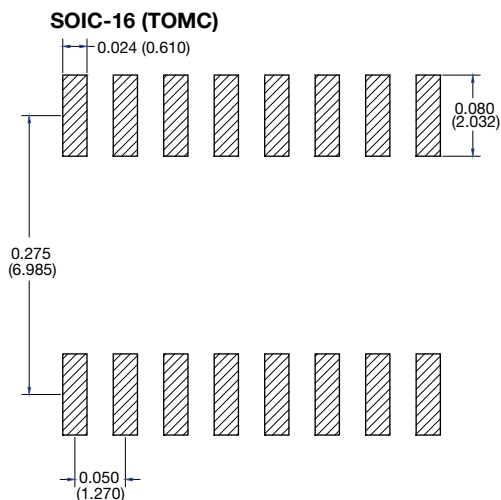

Surface Mount Networks SOIC Wide Body 300 mils (WOMC Series)

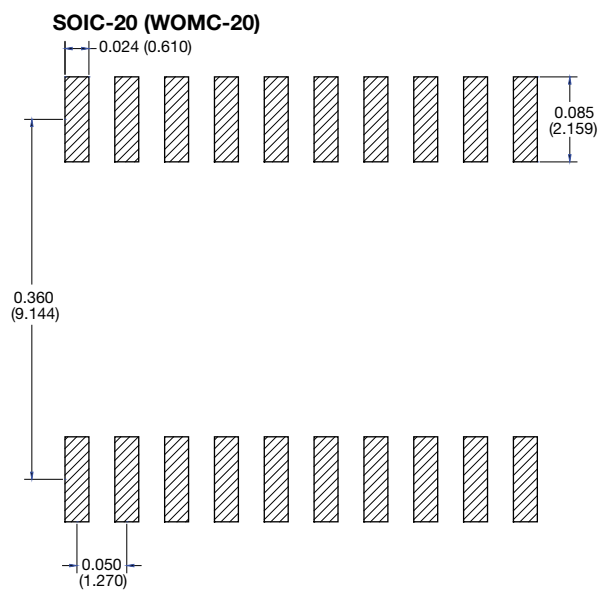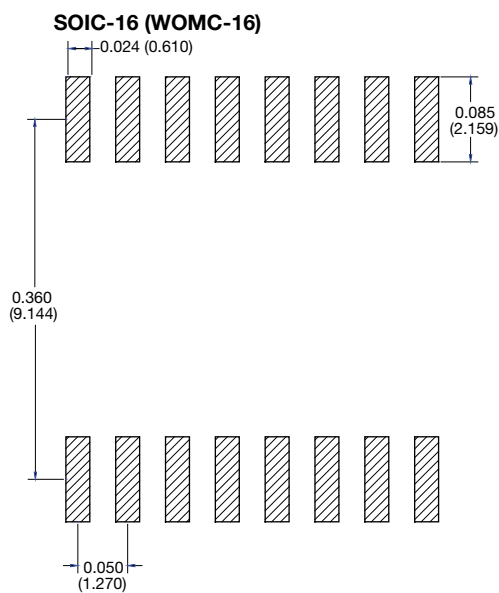





Surface Mount Networks High Density SSOP, TSOP (VSSR, VTSR Series)

SSOP MO-137


OSOP-16, VSSR-16

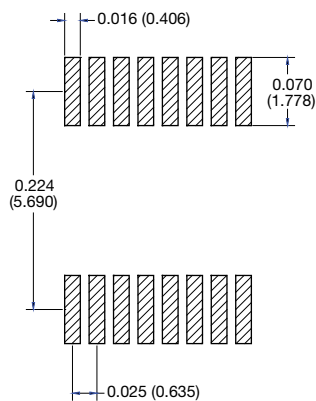

OSOP-20, VSSR-20

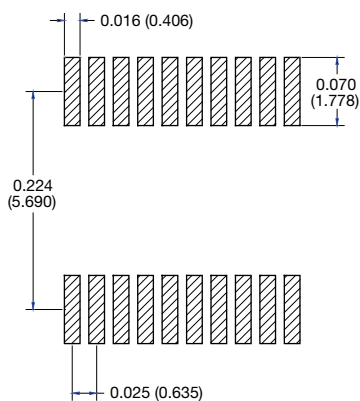


OSOP-24, VSSR-24, HD-CSO-24

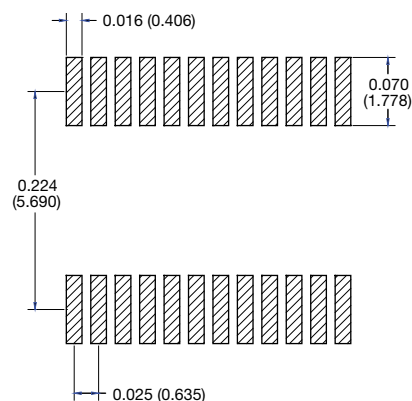


TSSOP MO-153


VTSR-16

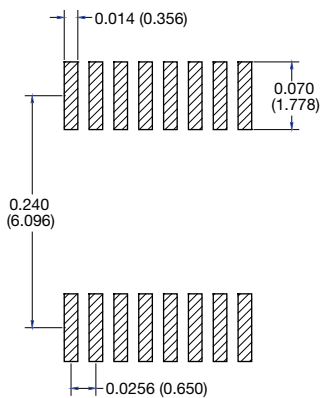

VTSR-20

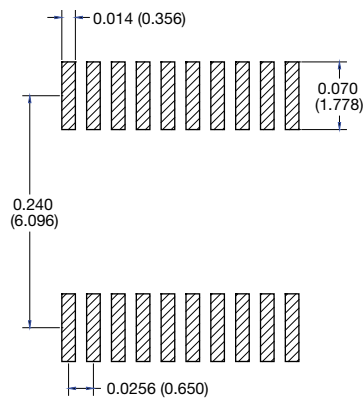


VTSR-24

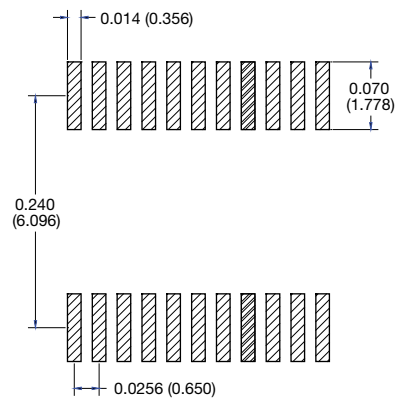


Surface Mount Leadless Networks (LCC Series)

16 Pin LCC

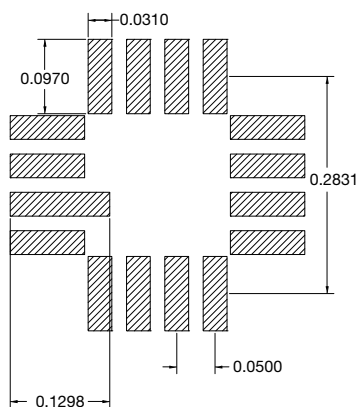


20 Pin LCC

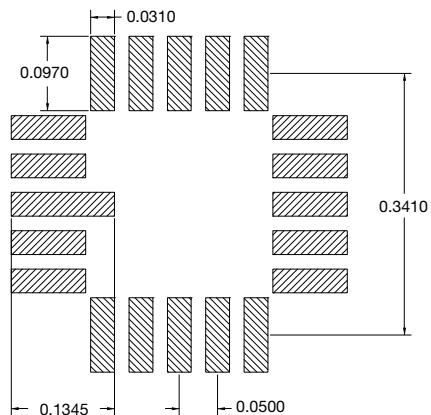

Surface Mount Leadless Networks (MPH Series)


4 Pin LCC



Surface Mount Leadless Packages DUAL/ QUAD Flat No Lead (DFN, QFN Series)


DFN MLP

DFN-8 4 x 5 mm Sq

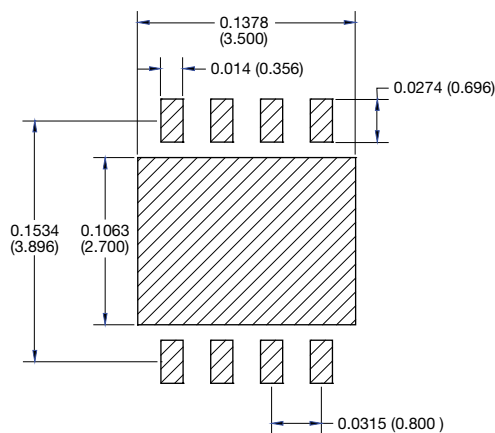


QFN MLP

QFN-20 5 x 5 mm Sq

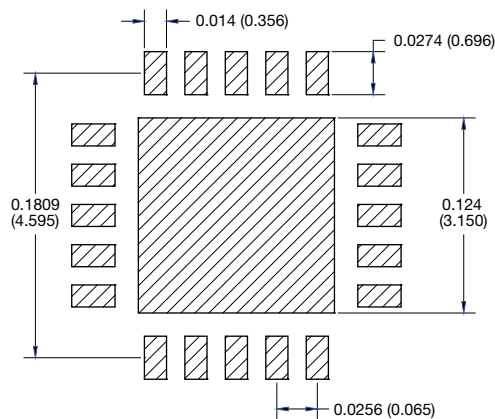




Surface Mount Leadless Resistor Arrays (PR Series)

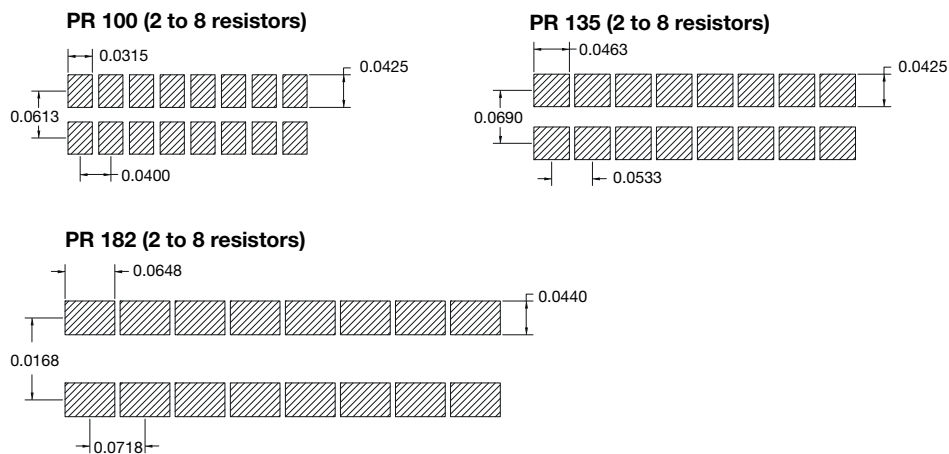

Note

- All dimensions in inches (mm)

Flatpack

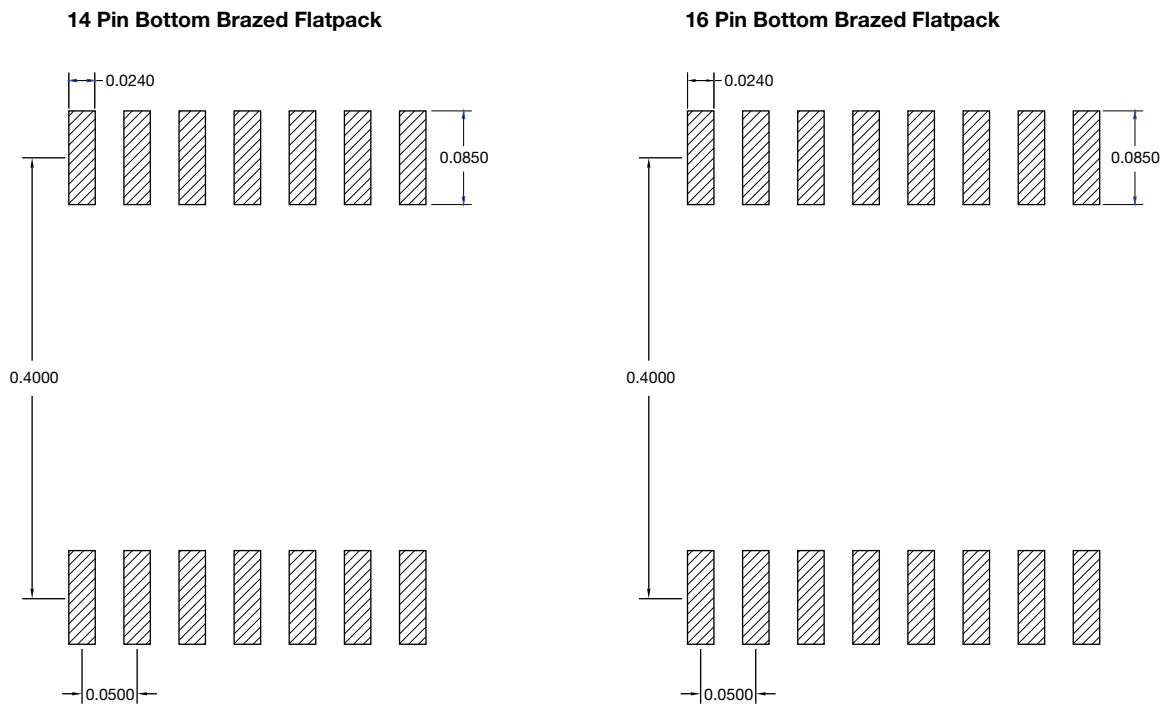



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay:

[MPMA10011002AT5](#) [MPMA10012001AT5](#) [MPMA5002AT5](#) [MPMA2002AT5](#) [MPMA1001AT5](#) [MPMA50011002AT5](#)
[MPMA2001AT5](#) [MPMA10012502AT5](#) [MPMA1002AT5](#) [MPMA10015001AT5](#) [MPMA10015002AT5](#)