




E-NETTR Single Port Transformer Module

P/N: H0651-L


- * Designed to meet RoHS requirement
- * Designed to meet IR 255°C peak Requirement.
- * Primary inductance 150 μ H min.
- * Operating temperature range: -40°C to +125°C



Electrical Specifications@25° C


Part Number	Turn Ratio $\pm 2\%$	Insertion Loss (dB Max)	Return Loss (dB Min)	CMRR (dB Min)		100KHZ 0.1V		DCR Ω	Hi-Pot (Vrms MIN)
		4MHZ	4MHZ	1-10MHz	10- 1000MHz	LX	LK		
H0651-L	1CT:1CT	-0.25	-20	-35	-20	150 μ H MIN	0.4 μ H MAX	0.85MAX	DC 4300V

Mechanical

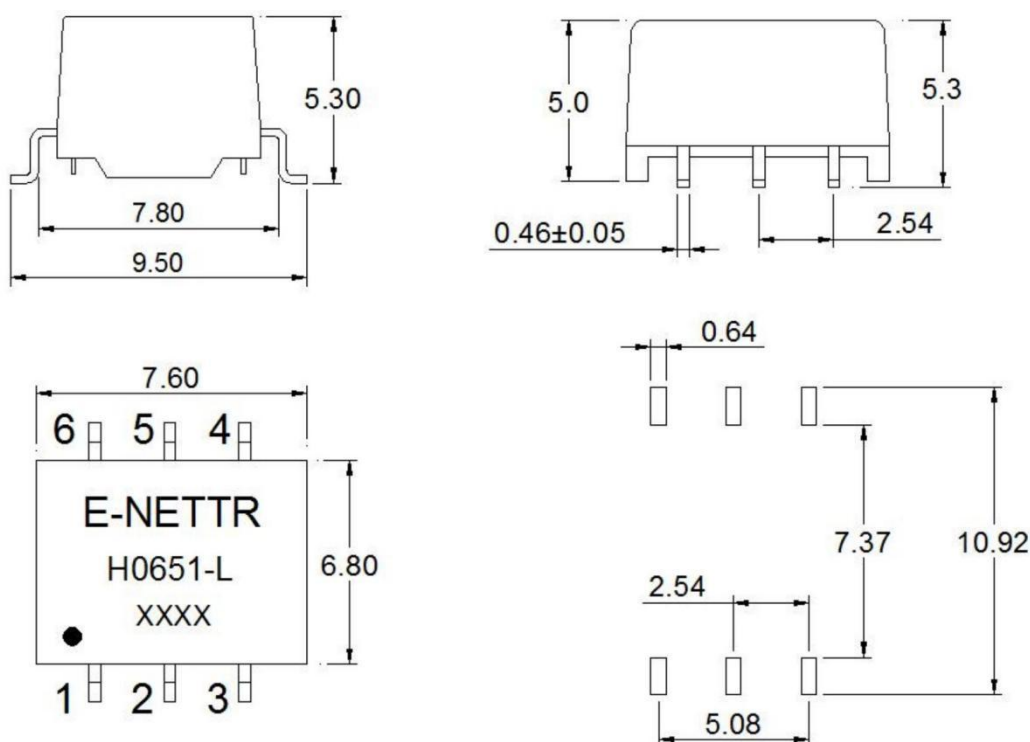

Unless otherwise specified tolerances: xx.xo $\pm$ 0.25mm
o.xx $\pm$ 0.05mm

Schematic

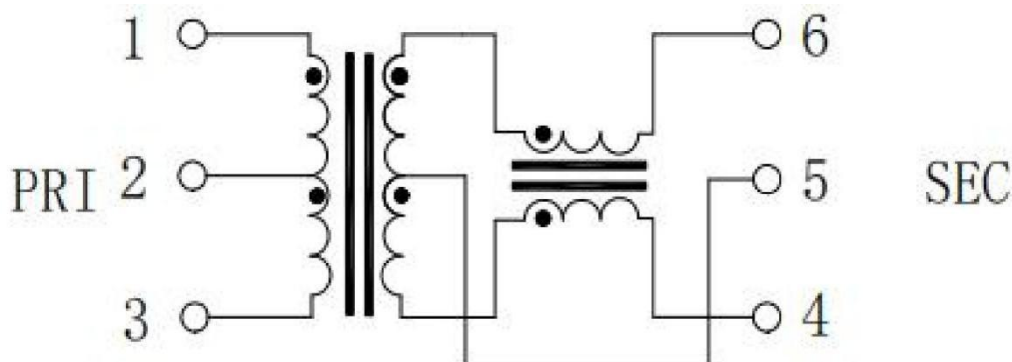

东莞市祥星电子有限公司

地址：东莞市石碣镇横滘科技中路第三工业区

TEL:0769-86384669

FAX:0769-81813600

Http://www.e-nettr.com

Mobil:13549396638

E-mail: xingguang@e-nettr.com