
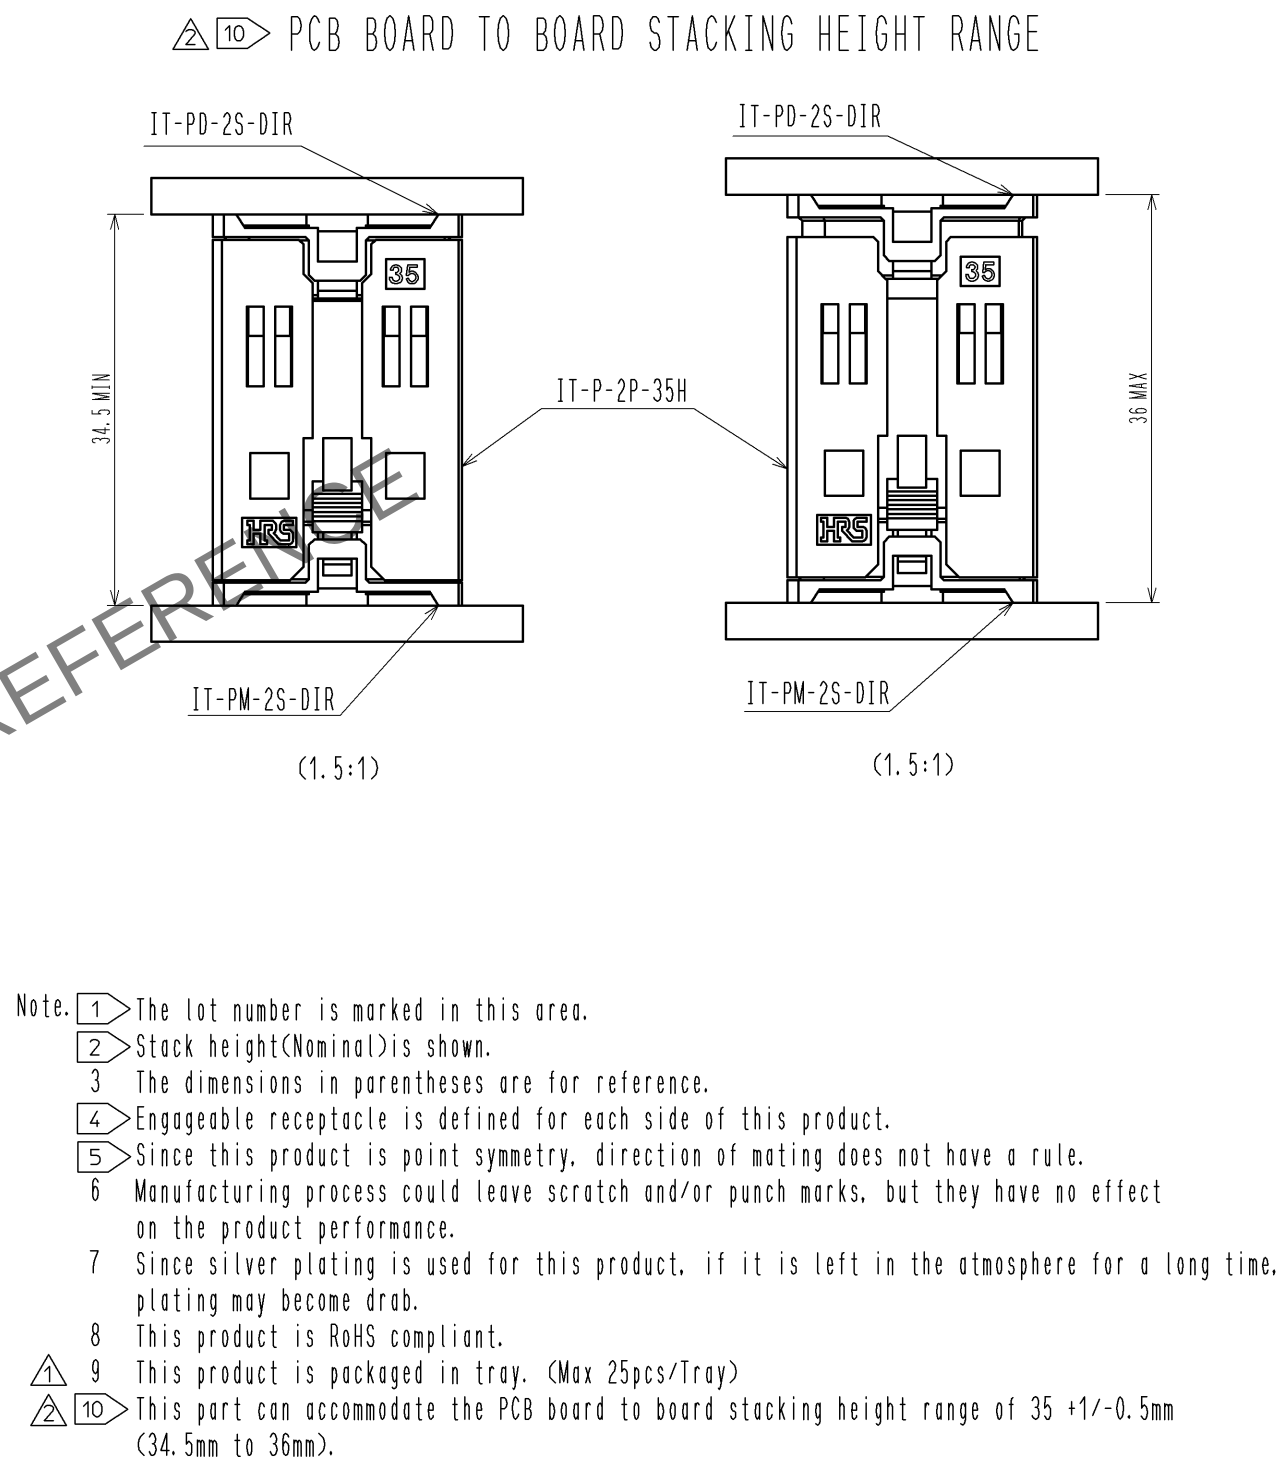
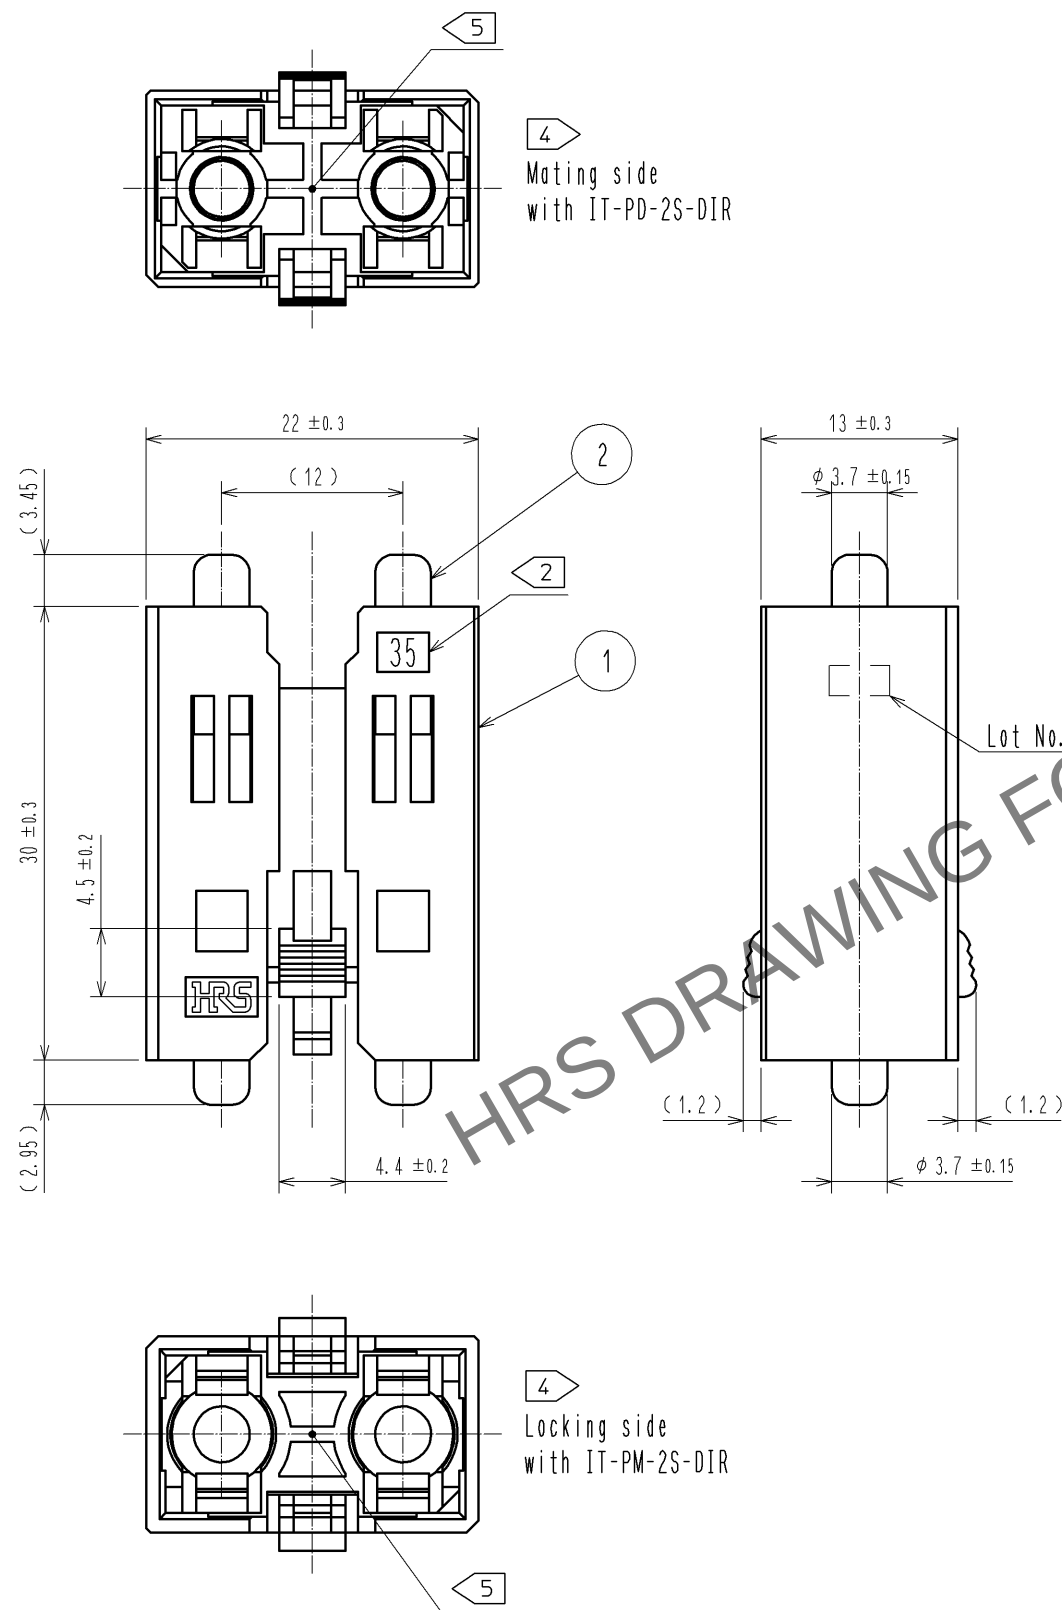


Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



- Note.
- 1 The lot number is marked in this area.
 - 2 Stack height(Nominal)is shown.
 - 3 The dimensions in parentheses are for reference.
 - 4 Engageable receptacle is defined for each side of this product.
 - 5 Since this product is point symmetry, direction of mating does not have a rule.
 - 6 Manufacturing process could leave scratch and/or punch marks, but they have no effect on the product performance.
 - 7 Since silver plating is used for this product, if it is left in the atmosphere for a long time, plating may become drab.
 - 8 This product is RoHS compliant.
 - 9 This product is packaged in tray. (Max 25pcs/Tray)
 - 10 This part can accommodate the PCB board to board stacking height range of 35 +1/-0.5mm (34.5mm to 36mm).

2	Brass	Over Plating : Silver 5.1μm		4	Polystyrene	(Tray B)		
		Under Plating : Nickel 1.3μm						
1	PBT	Black	UL94V-0	3	Polystyrene	(Tray A)		
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
		2 : 1	 4	DIS-F-006732		TF. SUGAWARA	MK. NAGATA	13. 04. 01
		APPROVED : HS. OKAWA		11. 12. 16	DRAWING NO. EDC3-339735-00			
		CHECKED : KI. HIROKAWA		11. 12. 15	PART NO. IT-P-2P-35H			
		DESIGNED : KN. SHIBUYA		11. 12. 15	CODE NO. CL636-0602-2-00			
	HIROSE ELECTRIC CO. , LTD.	DRAWN : KN. SHIBUYA		11. 12. 15	 			

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

