

Ordering Information:




C5030HF-XP - **
1 2

1.Part No.

2.Material:

(blank):UL94V-2/Natural

V0:UL94V-0/White

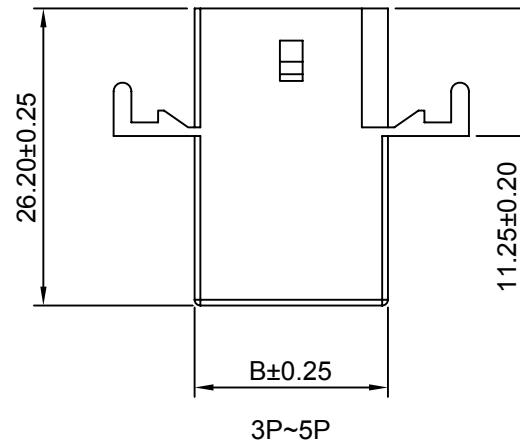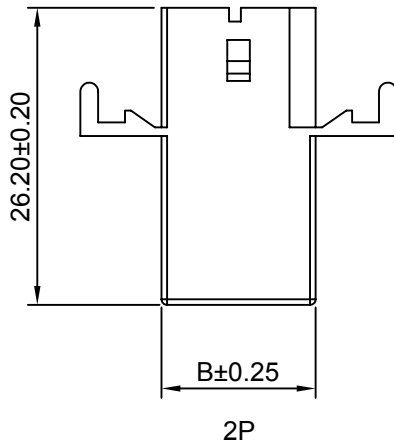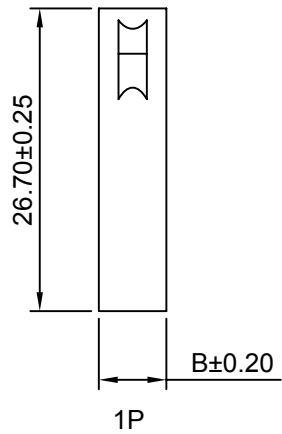

SPECIFICATIONS:

Current Rating:12A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
1P	---	5.96	4P	15.09	22.20
2P	6.30	13.70	5P	20.12	27.23
3P	10.06	17.17			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	1.5:1	1 of 1

Draw BY:	Approved :
YanKing	GONGYB

Title :	
5.03mm PITCH	
HOUSING	
DRAW NO :	C5030HF-XP
REV	A0

REV	DESCRIPTION	DATE
A0	NEW RELEEASE	2015.04.10

General Tolerance	
x.xx≤0.25	ANGLE±
x.xx≤0.20	⊕
x.xxx≤0.15	⊙