

Actuator

17-051350

Distribution by
DigiKey**DigiKey**<https://digikey.eao.com/p/17-051350>

Your product:



17-051350 Actuator

FRONT

Reflector:	Metal, black chromium-plated, internal
Front form:	round
Front dimension:	Ø 9,5 mm

MOUNTING

Mounting cut-out:	Ø 8 mm
Design:	raised

OPERATING-/INDICATION PART

Illumination colour:	Red
-----------------------------	-----

ELECTRICAL CHARACTERISTICS

Operation current:	20 mA $\pm$ 15 %
Lumi. Intensity:	80 mcd
Operating voltage:	24 V AC/DC $\pm$ 10 %
Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector

MECHANICAL CHARATERISTIC

Terminal:	Plug-in terminal, 2.8 x 0.8 mm
Tightening torque:	Fixing nut max. 0.2 Nm
Weight:	0.005 kg

AMBIENT CONDITION


IP Protection:	IP40 front side, IP65 front side, according to IEC 60529
Storage temperature:	– 25 °C ... + 80 °C
Operating temperature:	– 20 °C ... + 60 °C

CERTIFICATE


Conformities:	2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)
Approbations:	UL

OTHER

Kind of illumination:	Single-LED
Short Description:	Actuator, Ø 8 mm, Ø 9,5 mm, round, Plug-in terminal, 2.8 x 0.8 mm, Red
Hints:	Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.
Mounting cut-outs:	

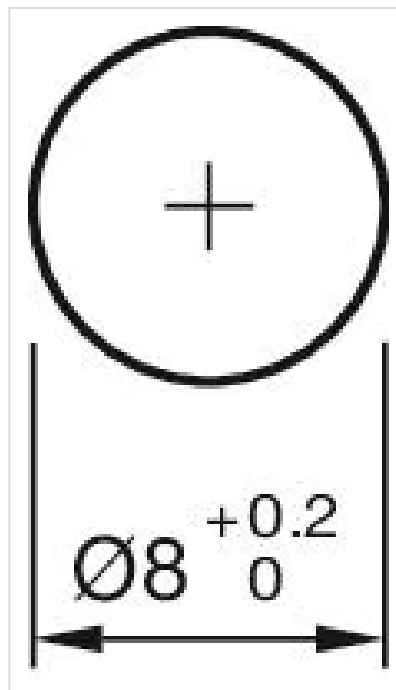

Dimension drawings:

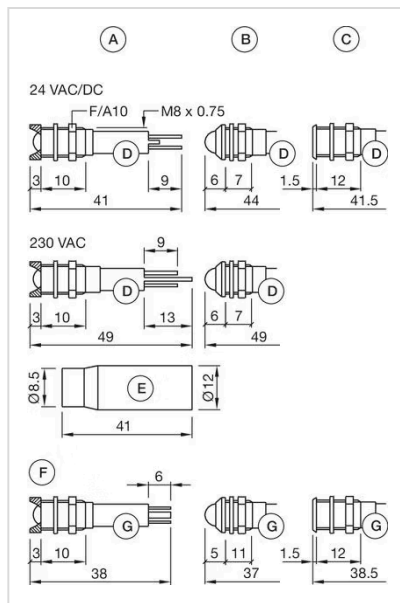

A = interior
 B = exterior
 C = superflat
 D = Plug-in terminal 2.8 mm x 0.8 mm
 E = Multi-colour
 F = Protection tube
 G = Plug-in terminal 2.0 mm x 0.5 mm

Wiring diagrams:

