


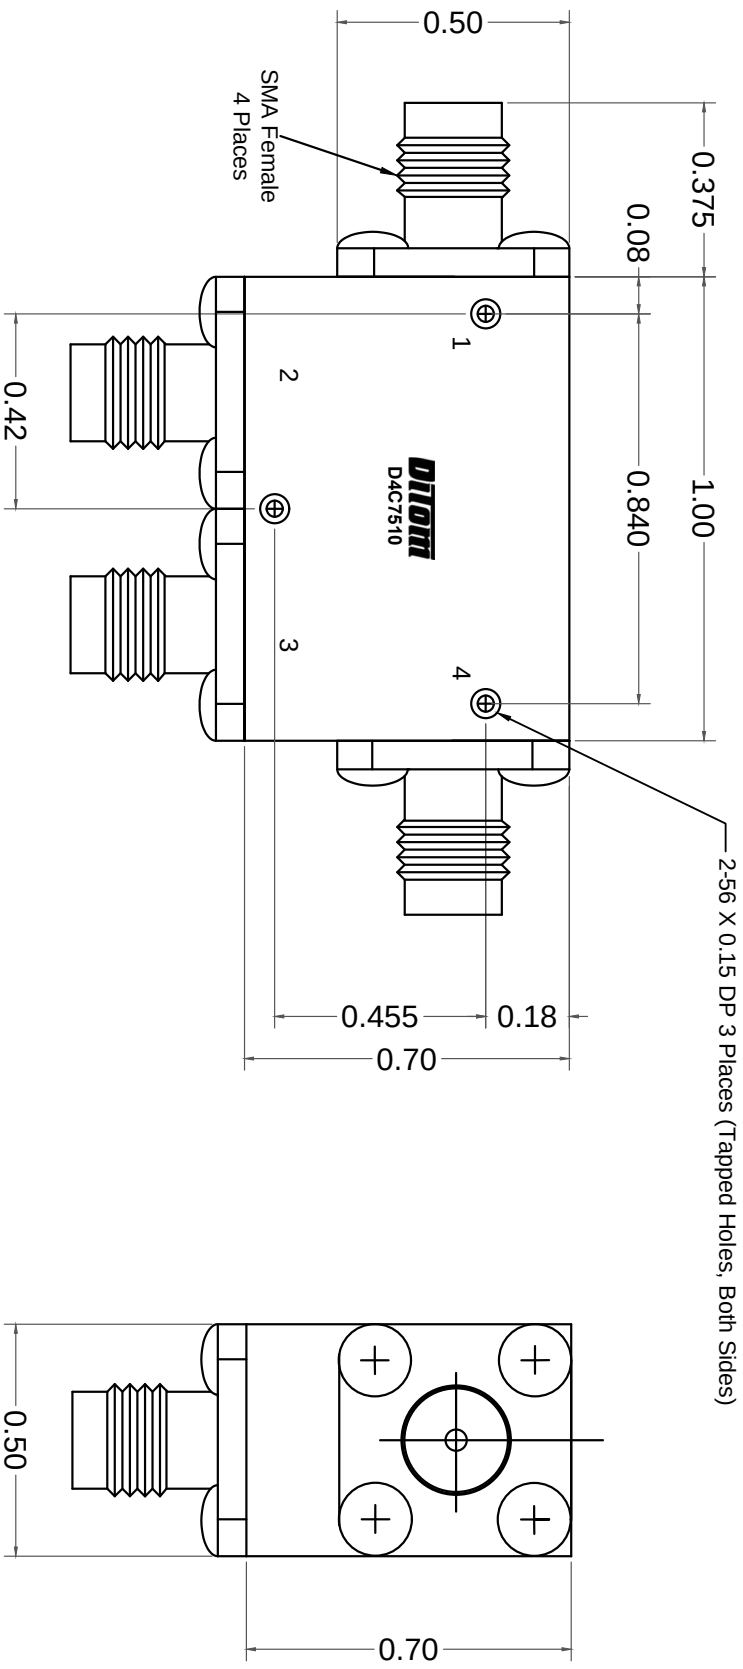

ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE (GHz):	7.500 - 10.000
ISOLATION (dB):	20 MIN (PER JUNCTION)
INSERTION LOSS (dB):	0.50 MAX (PER JUNCTION)
VSWR:	1.25 MAX
POWER: AVG (ALL PORTS):	10W
PEAK:	30W

MECHANICAL SPECIFICATIONS

CONNECTORS:	SMA-FEMALE, STAINLESS STEEL, PASSIVATE
CONTACT PINS:	BERYLLIUM COPPER, GOLD PLATE
OPERATING TEMPERATURE:	-30° to +65°C
WEIGHT (APPROX):	1.30 OUNCES

DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED		Diatom MICROWAVE INC. Fresno, California, USA	
TOLERANCE	XX±0.03 XXX±0.010	TITLE	7.5 - 10.0GHz SMA Circulator
SCALE	5:1	MODEL NO	D4C7510
		REV	