

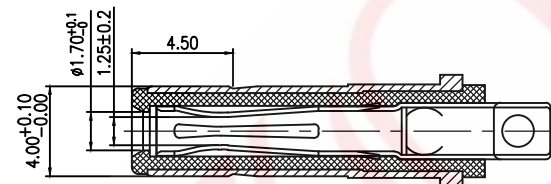
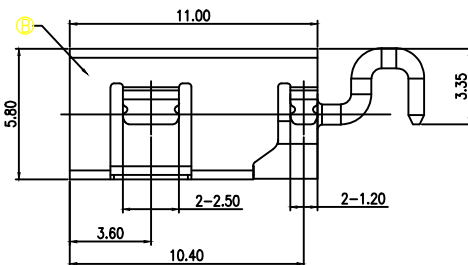


6		7		8	
REV	ECN NO	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2020. 06. 12

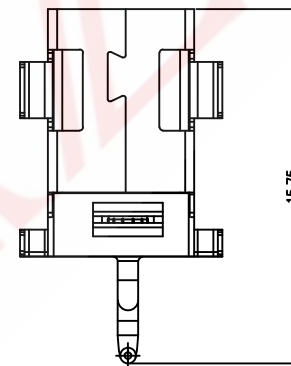


SPECIFICATION:

1. RATING: DC 20V 5A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES

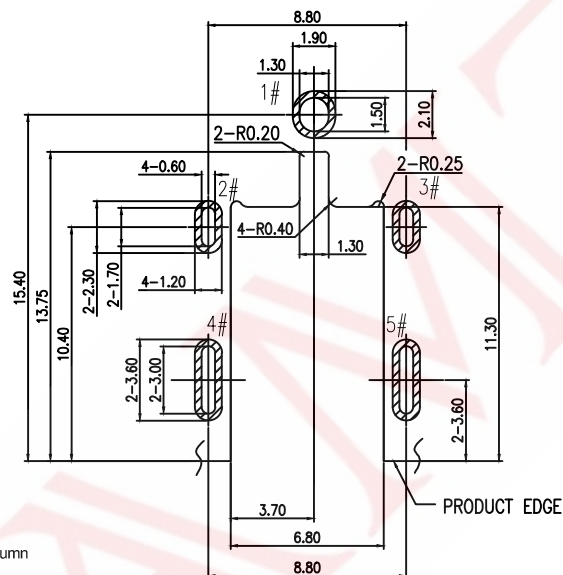

SCHEMATIC




SECTION A-A

— PRODUCT EDGE

RECOMMENDED PCB LAYOUT(t=1.00)
TOP VIEW TOLERANCE:±0.05

C	CENTER PIN	BRASS	GOLD FLASH/Ni 40u"	1
B	SHELL	COPPER ALLOY	Ni 40u"	1
A	HOUSING	HIGH TEMP. THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

FIRST VIEW



The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts.
WWW.KKK-JP.COM

TITLE::

大电流 沉板3.75mm插件

of DWG NO: 9CN5110-P1091

PART NO: 9CN5-40171091

MODEL NO:	9CN5110BEEA
-----------	-------------

NAME:

DC JACK

GENERAL TOLERANCE

$\geq 0 \sim 2 <$	± 0.15
-------------------	------------


$$^{12}\geq 2\sim 5< \quad \pm 0.25$$

$\geq 0 \sim 2 <$	± 0.15
-------------------	------------

$4 \geq 5$	± 0.35
------------	------------

SAMZO COMPONENTS

Electronic switch and connector manufacturer



3D VIEW