

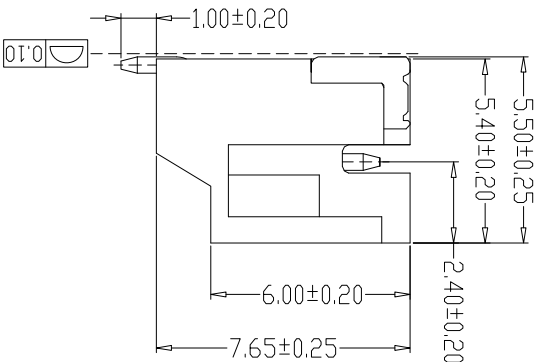


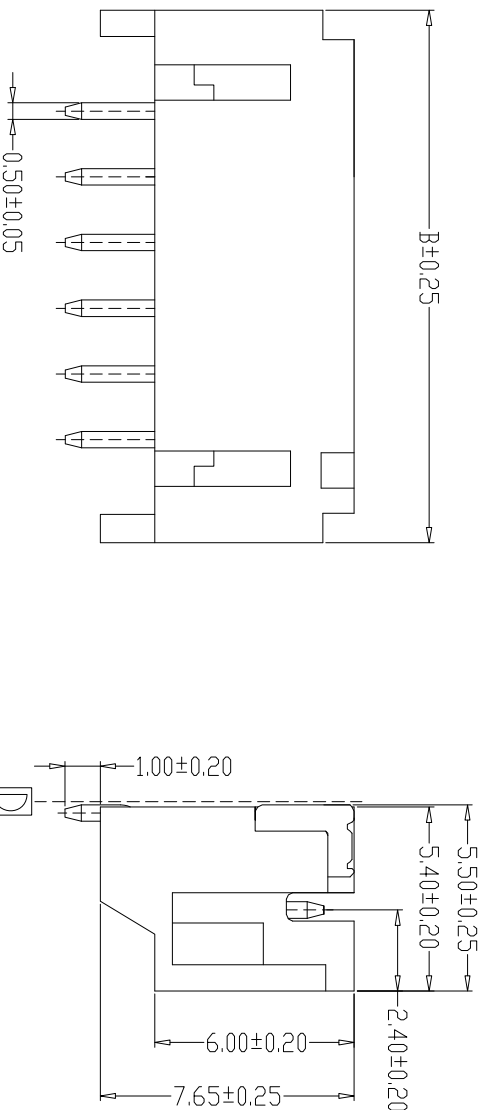

- SPECIFICATIONS
- 1、Current Rating: 2A AC, DC
 - 2、Voltage Rating: 250V AC, DC
 - 3、Temperature Range: -25°C~+85°C
 - 4、Contact Resistance: 20mΩ Max
 - 5、Insulation Resistance: 1000MΩ Min
 - 6、Withstanding Voltage: 800V AC/minute
 - 7、Material: Wafer Nylon 6T, UL94V-0
PIN Brass Tin-plated
Solder tad Brass Tin-plated

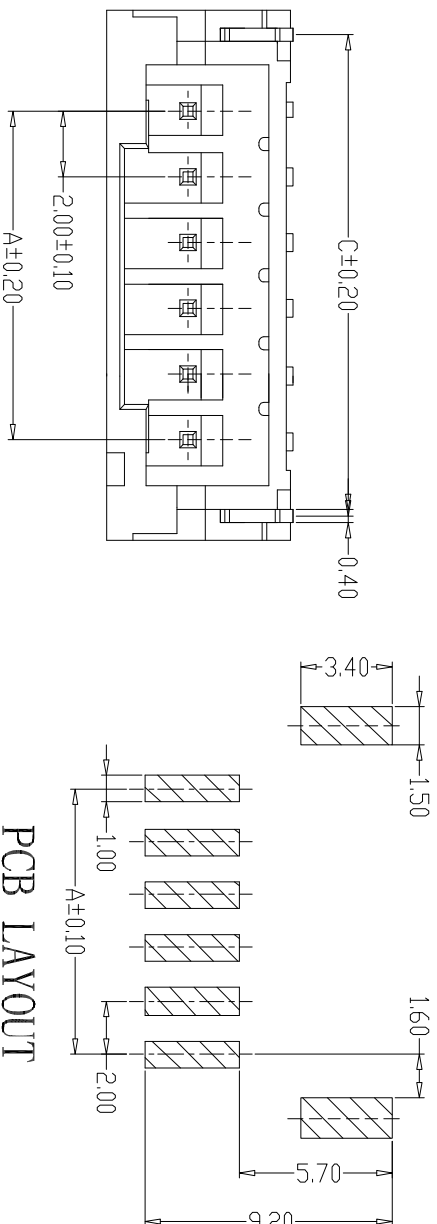

编 号	尺寸 (mm)		
	A	B	C
A2001WF-02A	2.00	8.00	6.70
A2001WF-03A	4.00	10.00	8.70
A2001WF-04A	6.00	12.00	10.70
A2001WF-05A	8.00	14.00	12.70
A2001WF-06A	10.00	16.00	14.70
A2001WF-07A	12.00	18.00	16.70
A2001WF-08A	14.00	20.00	18.70
A2001WF-09A	16.00	22.00	20.70
A2001WF-10A	18.00	24.00	22.70
A2001WF-11A	20.00	26.00	24.70
A2001WF-12A	22.00	28.00	26.70
A2001WF-16A	30.00	36.00	34.70

PCB LAYOUT



X.±0.5

X.±

X.±0.30

X.±

X.±0.20

X.±

X.±0.005, XXX ±

X.±

X.±

X.±

X.±

X.±

X.±

X.±0.5

X.±

X.±0.30

X.±

X.±0.20

X.±

X.±0.005, XXX ±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±0.5

X.±

X.±0.30

X.±

X.±0.20

X.±

X.±0.005, XXX ±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±0.5

X.±

X.±0.30

X.±

X.±0.20

X.±

X.±0.005, XXX ±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±0.5

X.±

X.±0.30

X.±

X.±0.20

X.±

X.±0.005, XXX ±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±0.5

X.±

X.±0.30

X.±

X.±0.20

X.±

X.±0.005, XXX ±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±0.5

X.±

X.±0.30

X.±

X.±0.20

X.±

X.±0.005, XXX ±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±0.5

X.±

X.±0.30

X.±

X.±0.20

X.±

X.±0.005, XXX ±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±0.5

X.±

X.±0.30

X.±

X.±0.20

X.±

X.±0.005, XXX ±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±0.5

X.±

X.±0.30

X.±

X.±0.20

X.±

X.±0.005, XXX ±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±0.5

X.±

X.±0.30

X.±

X.±0.20

X.±

X.±0.005, XXX ±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±0.5

X.±

X.±0.30

X.±

X.±0.20

X.±

X.±0.005, XXX ±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±0.5

X.±

X.±0.30

X.±

X.±0.20

X.±

X.±0.005, XXX ±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±0.5

X.±

X.±0.30

X.±

X.±0.20

X.±

X.±0.005, XXX ±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±0.5

X.±

X.±0.30

X.±

X.±0.20

X.±

X.±0.005, XXX ±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±0.5

X.±

X.±0.30

X.±

X.±0.20

X.±

X.±0.005, XXX ±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±0.5

X.±

X.±0.30

X.±

X.±0.20

X.±

X.±0.005, XXX ±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±0.5

X.±

X.±0.30

X.±

X.±0.20

X.±

X.±0.005, XXX ±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±0.5

X.±

X.±0.30

X.±

X.±0.20

X.±

X.±0.005, XXX ±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±0.5

X.±

X.±0.30

X.±

X.±0.20

X.±

X.±0.005, XXX ±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±0.5

X.±

X.±0.30

X.±

X.±0.20

X.±

X.±0.005, XXX ±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±0.5

X.±

X.±0.30

X.±

X.±0.20

X.±

X.±0.005, XXX ±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±

X.±0.5

X.±

X.±0.30

X.±

X.±0.20