

Actuator

704.033.7

Distribution by
DigiKey**DigiKey**<https://digikey.eao.com/p/704.033.7>

Your product:



704.033.7 Actuator

FRONT

Front bezel shape:	with protective hood
Front bezel material:	Aluminium
Front bezel colour:	Nature
Front form:	round
Front dimension:	Ø 29 mm

MOUNTING

Design:	raised
---------	--------

OPERATING-/INDICATION PART

Lens shape:	flush
Lens optics:	transparent
Lens illumination:	illuminative
Lens colour:	Colourless
Lens material:	Plastic

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
------------	---

MECHANICAL CHARACTERISTIC


Weight:	0.056 kg
Switching action:	Momentary

Operating Travel:	ca. 5.8 mm ± 0.2 mm
Terminal:	Screw terminal
Operating force:	8 N
Mechanical lifetime:	≤3 Mio. cycles of operation


AMBIENT CONDITION

Storage temperature:	– 40 °C ... + 85 °C
Operating temperature:	– 40 °C ... + 55 °C
IP Protection:	IP65 front side


OTHER

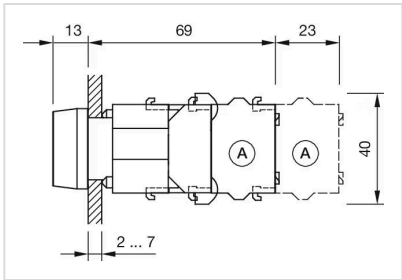Housing colour:	Grey
Hints:	Frontring with protective cover to be mounted with a torque of 0.4 Nm onto actuator, Max. 3 switching elements can be clipped on
max. number of switching elements:	3
Short Description:	Actuator, Ø 29 mm, flush, illuminative, Colourless, Plastic, transparent, round, with protective hood, Nature, Aluminium, anodised, Momentary, Screw terminal
Housing material:	Plastic
Dimension drawings:	 <p>A = Screw terminal</p>

Wiring diagrams:

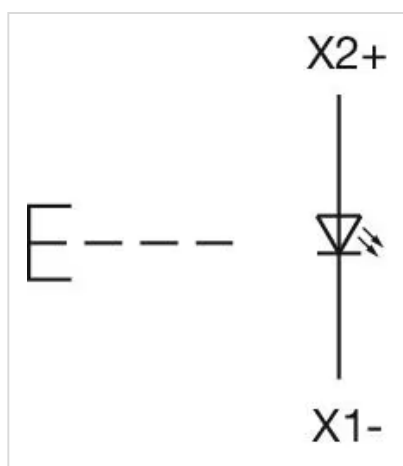

Mounting cut-outs:

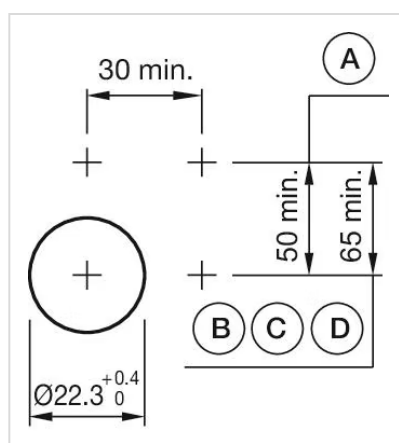

- A = Screw terminal
- B = Push-in terminal (PIT)
- C = Plug-in terminal 6.3 mm x 0.8 mm
- D = Double plug-in terminal 6.3 mm x 0.8 mm