


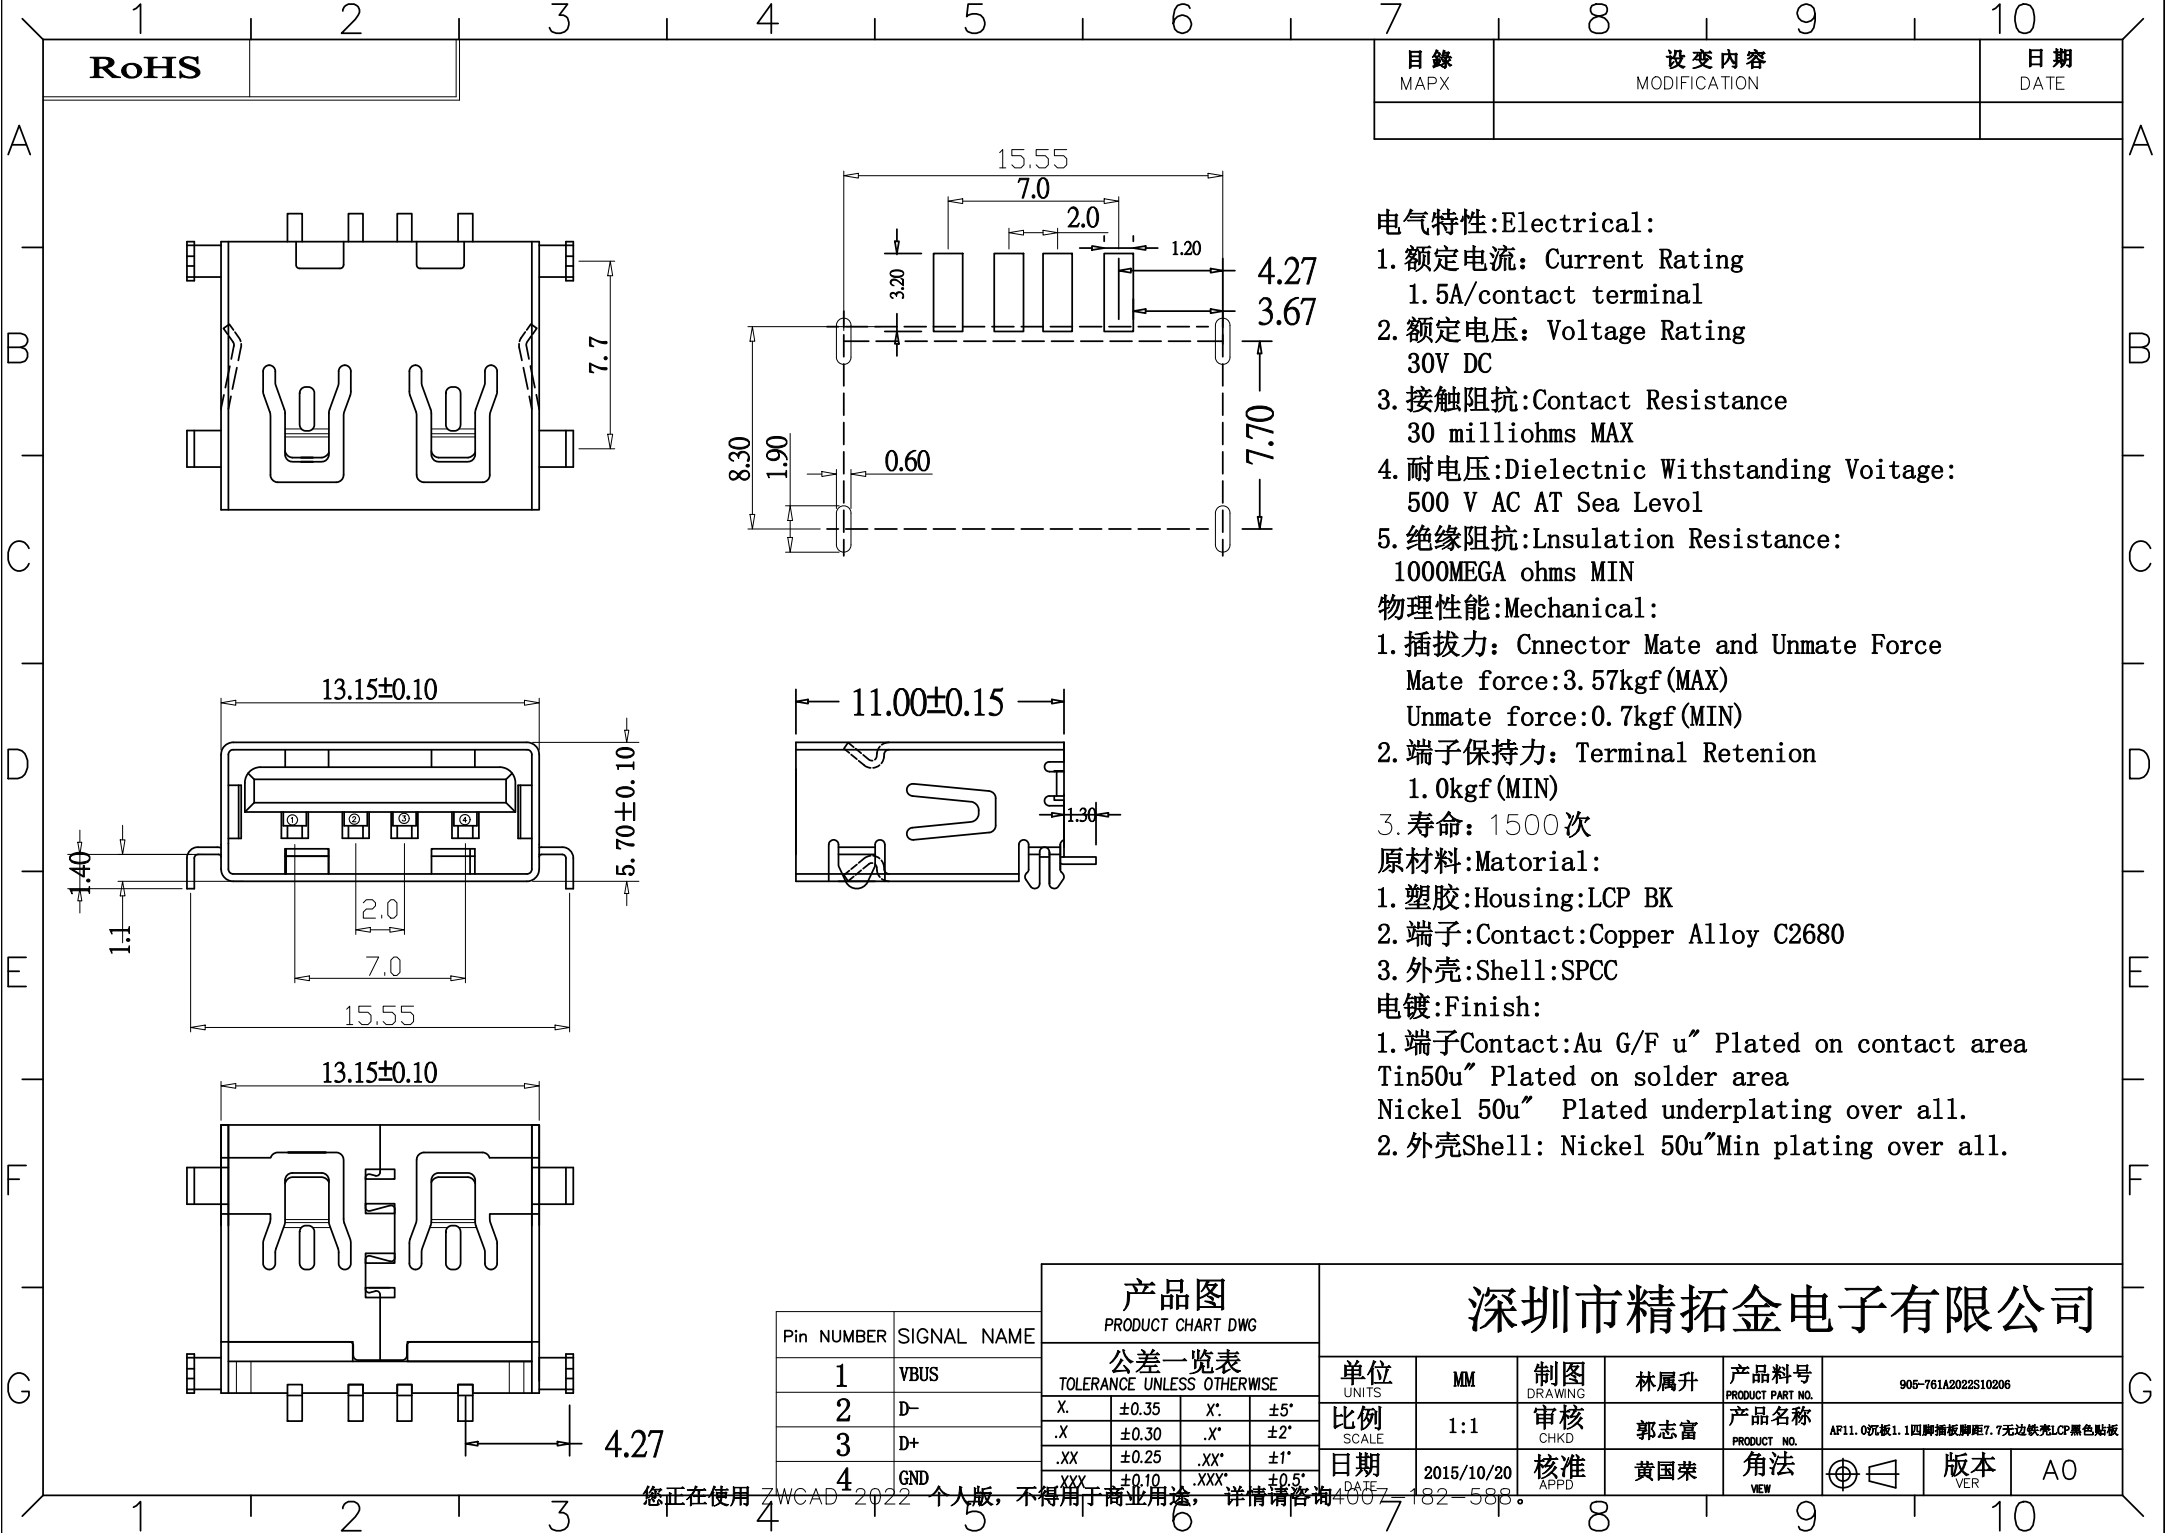

目錄 MAPX	設 變 內 容 MODIFICATION	日 期 DATE

- 电气特性:Electrical:
1. 额定电流: Current Rating
1.5A/contact terminal
 2. 额定电压: Voltage Rating
30V DC
 3. 接触阻抗:Contact Resistance
30 milliohms MAX
 4. 耐电压:Dielectnic Withstanding Voitage:
500 V AC AT Sea Levot
 5. 绝缘阻抗:Lnsulation Resistance:
1000MEGA ohms MIN
- 物理性能:Mechanical:
1. 插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:0.7kgf (MIN)
 2. 端子保持力: Terminal Retenion
1.0kgf (MIN)
 3. 寿命: 1500 次
- 原材料:Matorial:
1. 塑胶:Housing:LCP BK
 2. 端子:Contact:Copper Alloy C2680
 3. 外壳:Shell:SPCC
- 电镀:Finish:
1. 端子Contact: Au G/F u" Plated on contact area
Tin50u" Plated on solder area
Nickel 50u" Plated underplating over all.
 2. 外壳Shell: Nickel 50u"Min plating over all.

产品图 PRODUCT CHART DWG		深圳市精拓金电子有限公司									
Pin NUMBER	SIGNAL NAME	公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	林属升	产品料号 PRODUCT PART NO.	905-761A2022S10206		
1	VBUS	X.	±0.35	X'.	±5'	比例 SCALE	1:1	审核 CHKD	郭志富	产品名称 PRODUCT NO.	AF11.0沉板1.1四脚插板脚距7.7无边铁壳LCP黑色贴板
2	D-	.X	±0.30	.X'	±2'	日期 DATE	2015/10/20	核准 APPD	黄国荣	角法 VIEW	
3	D+	.XX	±0.25	.XX'	±1'					版本 VER	A0
4	GND	.XXX	±0.10	.XXX'	±0.5'						