

HC-STA-B32-SHWD-2SSM32-ELC-AL - Housing



1424848

<https://www.phoenixcontact.com/us/products/1424848>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Box mounting bases B32, with double locking latch, material: Die-cast aluminum, salt water resistant, cable outlets: 2, lateral, 2x M32, height: 90 mm, cable gland: none, Standard

Your advantages

- Good shielding in the event of electromagnetic interference

Commercial data

Item number	1424848
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF56
Product key	BF7APB
Catalog page	Page 644 (C-2-2019)
GTIN	4055626382531
Weight per piece (including packing)	846.5 g
Weight per piece (excluding packing)	723 g
Customs tariff number	85389099
Country of origin	CN

HC-STA-B32-SHWD-2SSM32-ELC-AL - Housing



1424848

<https://www.phoenixcontact.com/us/products/1424848>

Technical data


Product properties

Product type	Housing with locking latch
Housing type	Box mounting bases
Application	Standard
Type	B32
No. of cable outlets	2
Type of the screw connection	2x M32
Type	Tall design
Cable outlet	lateral
Pg screw connection	none

Data management status

Article revision	05
------------------	----

Dimensions

Dimensional drawing	
Width	94 mm
Height	90 mm
Length	125 mm
Drill hole distance, horizontal	112 mm
Drill hole distance, vertical	67 mm
Hole diameter	5.5 mm

Material specifications

Flammability rating according to UL 94	V0 (Interlock)
Seal material	NBR, conductive
Housing material	Die-cast aluminum, salt water resistant
Housing surface material	uncoated
Locking latch material	PA

Mechanical properties

Mechanical data

Type of the screw connection	2x M32
Locking type	Latch

Connection data

Tightening torque	2 Nm ... 3 Nm (for M5 mounting screws on the surface-mount housing)
-------------------	---

HC-STA-B32-SHWD-2SSM32-ELC-AL - Housing



1424848

<https://www.phoenixcontact.com/us/products/1424848>

Mounting


Assembly note	One opening is sealed with a plastic filler plug and can be opened using a screwdriver.
---------------	---

Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP66
	IP67
Enclosure rating (NEMA)	4 (UL 50e)
	4X (UL 50e)
	12 (UL 50e)
Impact strength	IK09
Ambient temperature (operation)	-40 °C ... 125 °C

Drawings

Dimensional drawing

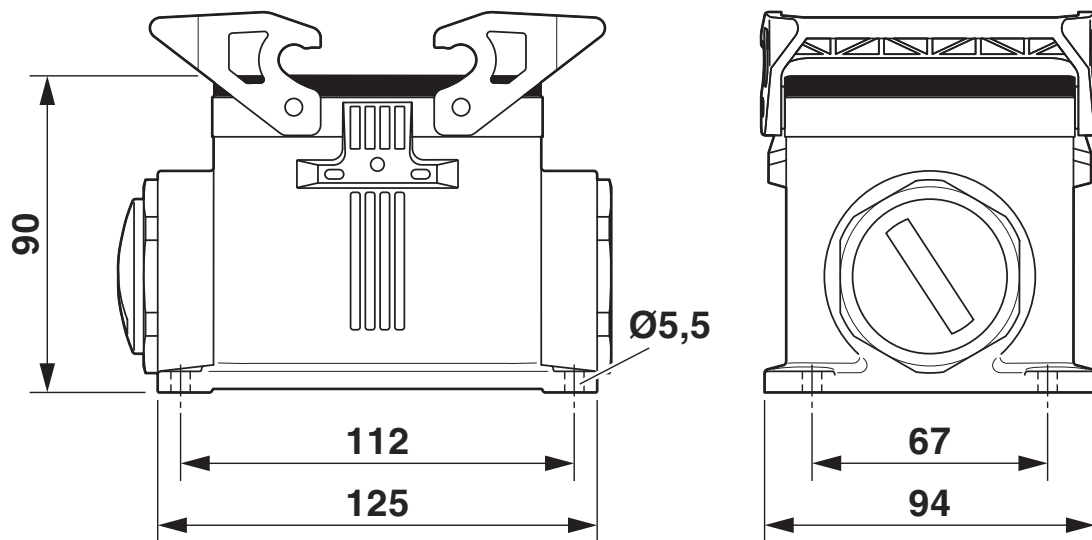

Dimensional drawing

HC-STA-B32-SHWD-2SSM32-ELC-AL - Housing



1424848

<https://www.phoenixcontact.com/us/products/1424848>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1424848>

**DNV**
Approval ID: TAE000037S

**EAC**
Approval ID: RU C-DE.BL08.B.00511

**cUL Recognized**
Approval ID: E255026

**UL Recognized**
Approval ID: E255026

cULus Recognized

HC-STA-B32-SHWD-2SSM32-ELC-AL - Housing



1424848

<https://www.phoenixcontact.com/us/products/1424848>

Classifications

ECLASS

ECLASS-11.0	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202

ETIM

ETIM 9.0	EC000437
----------	----------

UNSPSC

UNSPSC 21.0	31261500
-------------	----------

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	5e977c9b-56b7-484f-9428-c20d08931c93

HC-STA-B32-SHWD-2SSM32-ELC-AL - Housing

1424848

<https://www.phoenixcontact.com/us/products/1424848>



Accessories

HC-STA-B32-BCSFD-PL-BK - Protective cover

1424850

<https://www.phoenixcontact.com/us/products/1424850>

Protective cover B32, for double locking latch, protective cover material: PA, height: 24.8 mm, seal: no, Standard, with lanyard



WP-G HF IP66 M32 BK - Screw connection

3240900

<https://www.phoenixcontact.com/us/products/3240900>

Cable gland, metric thread, IP66 protection, straight



HC-STA-B32-SHWD-2SSM32-ELC-AL - Housing

1424848

<https://www.phoenixcontact.com/us/products/1424848>



WP-G HF IP69K M32 BK - Screw connection

3240886

<https://www.phoenixcontact.com/us/products/3240886>

Cable gland, metric thread, IP68/69k protection, straight



WP-GA HF IP66 M32 BK - Screw connection

3240928

<https://www.phoenixcontact.com/us/products/3240928>

Cable gland, metric thread, IP66 protection, angled



HC-STA-B32-SHWD-2SSM32-ELC-AL - Housing

1424848

<https://www.phoenixcontact.com/us/products/1424848>



WP-GA HF IP69K M32 BK - Screw connection

3240914

<https://www.phoenixcontact.com/us/products/3240914>

Cable gland, metric thread, IP68/69k protection, angled



WP-GR HF IP66 M32 BK - Screw connection

3240956

<https://www.phoenixcontact.com/us/products/3240956>

Cable gland, metric thread, IP66 protection, with strain relief



HC-STA-B32-SHWD-2SSM32-ELC-AL - Housing

1424848

<https://www.phoenixcontact.com/us/products/1424848>



WP-GR HF IP69K M32 BK - Screw connection

3240942

<https://www.phoenixcontact.com/us/products/3240942>



Cable gland, metric thread, IP68/69k protection, with strain relief

WP-G PP HF M32 - Screw connection

3241000

<https://www.phoenixcontact.com/us/products/3241000>



Cable gland made from PP with metric thread, IP65 protection

HC-STA-B32-SHWD-2SSM32-ELC-AL - Housing



1424848

<https://www.phoenixcontact.com/us/products/1424848>

WP-GT PP HF M32 - Screw connection

3241014

<https://www.phoenixcontact.com/us/products/3241014>



Cable gland made from PP with metric thread, rotatable, IP54 protection

WP-G BRASS IP40 M32 - Screw connection

3241049

<https://www.phoenixcontact.com/us/products/3241049>



Cable gland made from brass with metric thread, IP40 protection

HC-STA-B32-SHWD-2SSM32-ELC-AL - Housing



1424848

<https://www.phoenixcontact.com/us/products/1424848>

WP-GT BRASS M32 - Screw connection

3241035

<https://www.phoenixcontact.com/us/products/3241035>

Cable gland made from brass with metric thread, rotatable, IP40 protection



WP-G BRASS IP65 M32 - Screw connection

3241063

<https://www.phoenixcontact.com/us/products/3241063>

Cable gland made from brass with metric thread, IP65 protection



Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com