


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GW	-		A1	REVISED PER ECO-11-005294	06APR11	RK	HMR

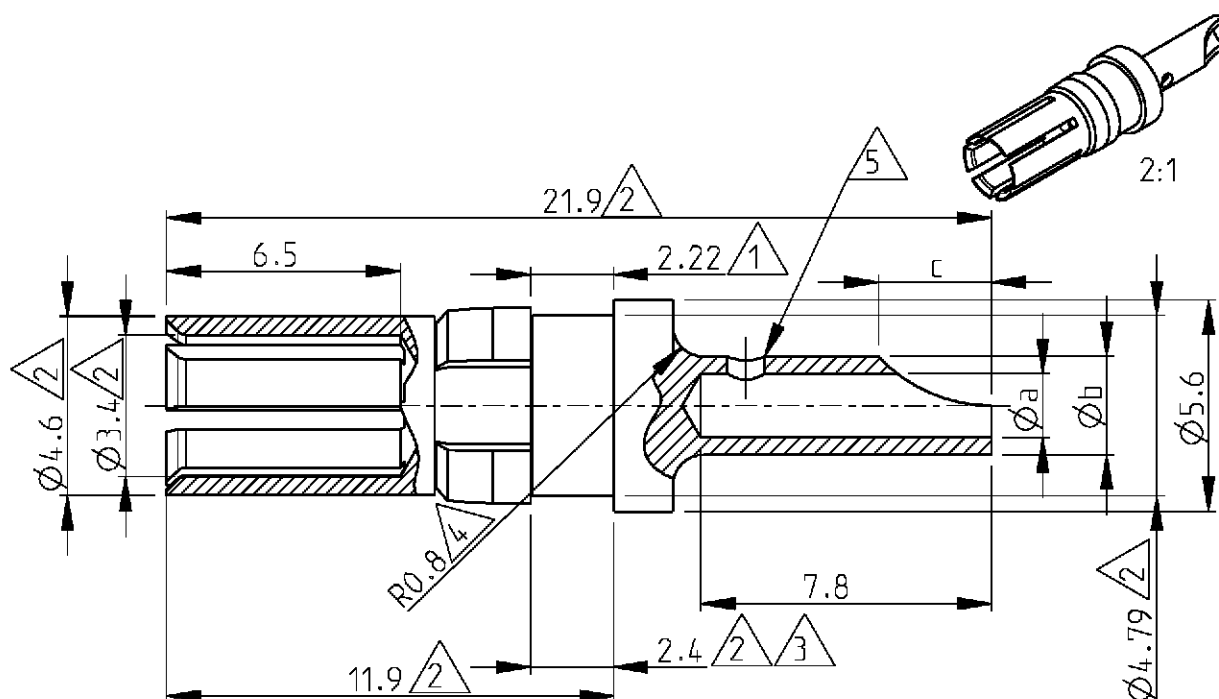

6) Application : DIN 41612 type M.


 Only on 1-1393589-1

 Not applicable on 1393589-7

3 Measured with spring moved towards the mating face


Δ Max dimension

1 Min dimension



Cross reference table

Old part number	part number	Current	Øa	Øb	dim c	Material	Plating
1-1393589-1	C42334-A347-A96	10 A	1.7	2.6	3	Brass	1 µm Au or Pd in contact area
1393589-9	C42334-A347-A95	20 A	2.8	3.7	4	Brass	1 µm Au or Pd in contact area
1393589-7	C42334-A347-A94	40 A	4.8	5.6	5.2	Brass	1 µm Au or Pd in contact area

DIMENSIONS:		DWN B. Lenvain	23APR2001	MATERIAL		-	FINISH		-
mm		CHK K. Mattheeuws	23APR2001	 TE Connectivity					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. Leeman	23APR2001						
0 PLC	±	PRODUCT SPEC		NAME					
1 PLC	±	-							
2 PLC	±	APPLICATION SPEC		High current socket with wire connection					
3 PLC	±	-							
4 PLC	±	WEIGHT		SIZE	CAGE CODE	DRAWING NO		RESTRICTED TO	
ANGLES	±	-		A 4	00779	C-1393589-7		-	
		CUSTOMER DRAWING				SCALE	5/1	SHEET	1 OF 1
								REV	A1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[C42334A 347A 94](#)