

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

—

© COPYRIGHT

 $\Theta_f =$

ALL RIGHTS RESERVED

LOC

DIST	
------	--

A

39

REVISIONS

P	T
---	---

LIR

DESCRIPTION

DATE _____

DAWN

APVE

R

BDI

SED. D.


ER 50

0.14 00006


26A

4	NI
---	----

	MM
--	----

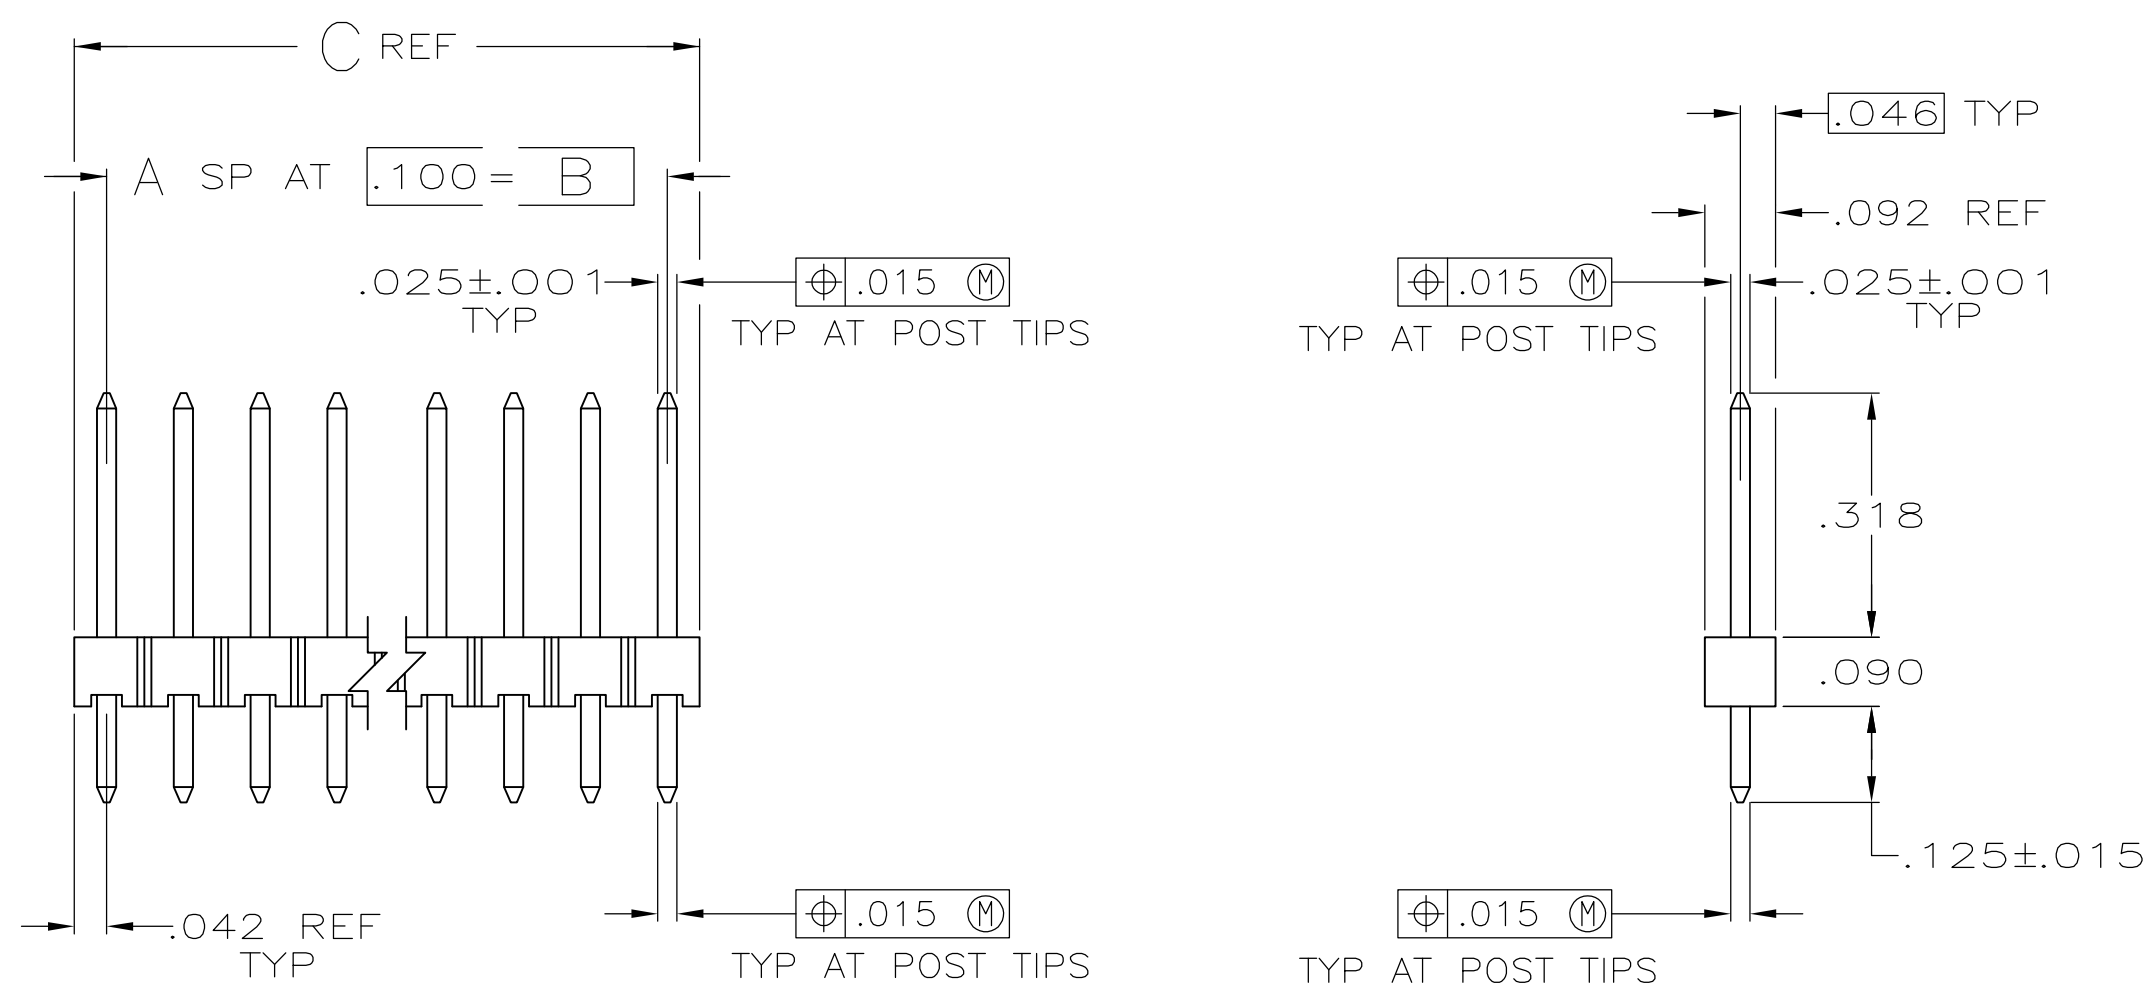


- | | |
|---|---|
| 1 | TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD |
| 2 | ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS |
| 3 | PACKAGE IN SINGLE TUBES |
| 4 | .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL. |
| 5 | .000100-.000200 BRIGHT TIN OVER .000050 NICKEL. |
| 6 | PRELIMINARY PART - NOT RELEASED FOR PRODUCTION. |
| 7 | HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK. |
| 8 | OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI |

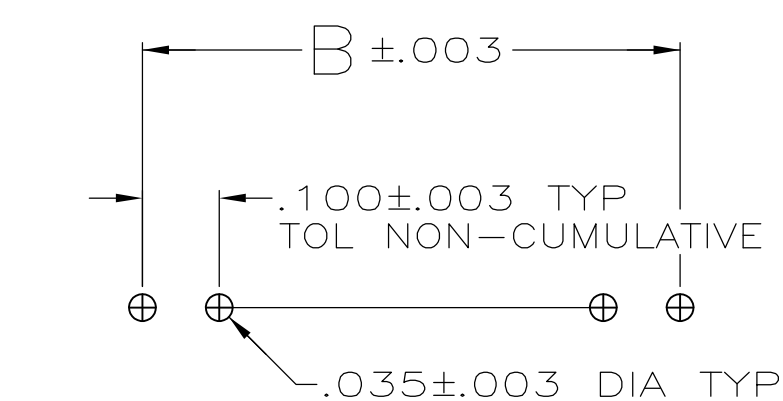

RECOMMENDED HOLE LAYOUT

		OBSOLETE			.484	.400	4	5	5-103321-3
					1.384	1.300	13	14	5-103321-2
					1.184	1.100	11	12	5-103321-1
					1.084	1.000	10	11	5-103321-0
					.884	.800	8	9	4-103321-9
					3.984	3.900	39	40	4-103321-8
					1.584	1.500	15	16	4-103321-7
					.784	.700	7	8	4-103321-6
					.284	.200	2	3	4-103321-5
					.184	.100	1	2	4-103321-4
					.084	—	—	1	4-103321-3
SUPERSEDED BY 1-103321-4					1.384	1.300	13	14	4-103321-2
SUPERSEDED BY 103321-3					.284	.200	2	3	4-103321-1
					3.984	3.900	39	40	4-103321-0
 OBSOLETE					3.884	3.800	38	39	3-103321-9
 OBSOLETE					3.784	3.700	37	38	3-103321-8
 OBSOLETE					3.684	3.600	36	37	3-103321-7
					3.584	3.500	35	36	3-103321-6
 OBSOLETE					3.484	3.400	34	35	3-103321-5
 OBSOLETE					3.384	3.300	33	34	3-103321-4
 OBSOLETE					3.284	3.200	32	33	3-103321-3
 OBSOLETE					3.184	3.100	31	32	3-103321-2
 OBSOLETE					3.084	3.000	30	31	3-103321-1
 OBSOLETE					2.984	2.900	29	30	3-103321-0
 OBSOLETE					2.884	2.800	28	29	2-103321-9
 OBSOLETE					2.784	2.700	27	28	2-103321-8
 OBSOLETE					2.684	2.600	26	27	2-103321-7
 OBSOLETE					2.584	2.500	25	26	2-103321-6
					2.484	2.400	24	25	2-103321-5
 OBSOLETE					2.384	2.300	23	24	2-103321-4
 OBSOLETE					2.284	2.200	22	23	2-103321-3
 OBSOLETE					2.184	2.100	21	22	2-103321-2
 OBSOLETE					2.084	2.000	20	21	2-103321-1
 SUPERSEDED BY 7-146274-0					1.984	1.900	19	20	2-103321-0
 OBSOLETE					1.884	1.800	18	19	1-103321-9
 OBSOLETE					1.784	1.700	17	18	1-103321-8
 OBSOLETE					1.684	1.600	16	17	1-103321-7
					1.584	1.500	15	16	1-103321-6
 OBSOLETE					1.484	1.400	14	15	1-103321-5
					1.384	1.300	13	14	1-103321-4
 OBSOLETE					1.284	1.200	12	13	1-103321-3
 OBSOLETE					1.184	1.100	11	12	1-103321-2
 OBSOLETE					1.084	1.000	10	11	1-103321-1
					.984	.900	9	10	1-103321-0
					.884	.800	8	9	103321-9
					.784	.700	7	8	103321-8
					.684	.600	6	7	103321-7
					.584	.500	5	6	103321-6
					.484	.400	4	5	103321-5
					.384	.300	3	4	103321-4
					.284	.200	2	3	103321-3
					.184	.100	1	2	103321-2
					.084	—	—	1	103321-1
		PLATING		REMARKS	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.						DWN. 150C192 CHG. 23NOV92		 TE Connectivity		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN BY JOHN KNITTLE APP'D BY B. FLINCHBAUGH	NAME		ASSEMBLY, HEADER, BREAKAWAY, MOD II, SINGLE ROW, .100 C/L, VERTICAL, WITH .025 SQUARE POSTS			
				PRODUCT SPEC		SIZE		CAGE CODE	DRAWING NO	RESTRICTED ?
				APPLICATION SPEC		A1		00779	C=103321	--
MATERIAL POST: COPPER ALLOY		FINISH SEE TABLE		WEIGHT --		SCALE 4:1		SHEET 1 OF 1	REV --	
CUSTOMER DRAWING										

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[103321-6](#)