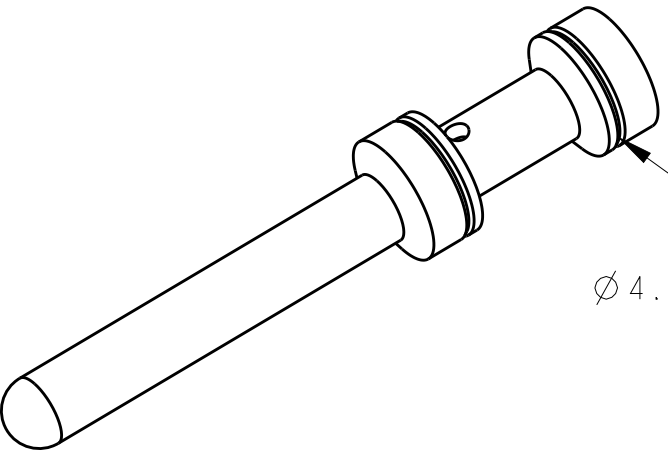
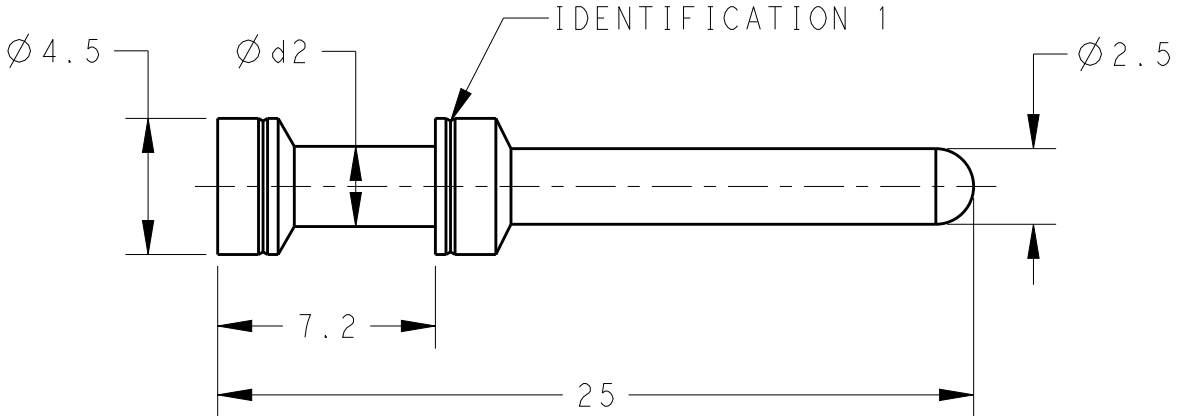

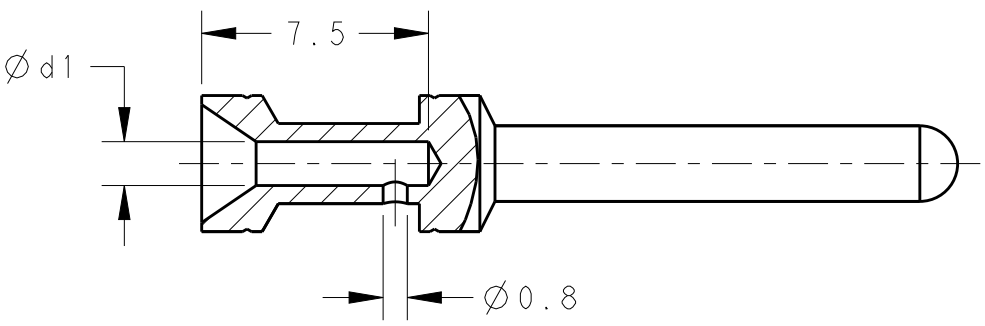




4		3		2		1							
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		20		REVISIONS							
© COPYRIGHT 20		BY -		ALL RIGHTS RESERVED.									
						P	LTR	DESCRIPTION	DATE	DWN	APVD		
							A	INITIAL	18JUN2014	DW	CW		
							A1	ECR-15-009407	01JUN2015	DW	CW		
						NOTES: 1. TECHNICAL CHARACTERISTICS: CONTACT MATERIAL: BRASS SURFACE PLATING: SILVER PLATING: >= 2µm GOLD PLATING: >= 0.75µm CONTACT RESISTANCE: <=5 mΩ WIRE RANGE: 0.14-4 mm ² (26-12 AWG) OPERATION TEMPERATURE: -40-+125°C							
						注释: 1. 技术参数: 公针材料: 黄铜 表面电镀: 镀银: >= 2µm 镀金: >= 0.75µm 接触电阻: <=5 mΩ 接线范围: 0.14-4 mm ² (26-12 AWG) 工作温度: -40-+125°C							
PIN CONTACT		PART NUMBER		d1	d2	WIRE GAUGE		STRIPPING LENGTH (mm)	IDENTIFICATION 1 (NUMBER OF GROOVES)		IDENTIFICATION 2 (NUMBER OF GROOVES)		
		SILVER PLATING	GOLD PLATING			MM ²	AWG						
		T2030001002-000	T2030011002-000	0.90	2.50	0.14-0.37	26-22	7.5	1 GROOVE		1 GROOVE		
		T2030001005-000	T2030011005-000	1.15	2.50	0.5	20		NO GROOVE		NO GROOVE		
		T2030001008-000	T2030011008-000	1.30	2.50	0.75	18		NO GROOVE		1 GROOVE		
		T2030001010-000	T2030011010-000	1.45	2.65	1.0	18		1 GROOVE		NO GROOVE		
		T2030001015-000	T2030011015-000	1.75	3.00	1.5	16		2 GROOVES		NO GROOVE		
		T2030001025-000	T2030011025-000	2.25	3.45	2.5	14		3 GROOVES		NO GROOVE		
		T2030001030-000	T2030011030-000	2.55	3.75	3.0	12		1 WIDE GROOVE		1 GROOVE		
T2030001040-000	T2030011040-000	2.85	3.85	4.0	12	NO GROOVE			NO GROOVE				
		THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN 18JUN2014 David Wang		 TE Connectivity					
		DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK 18JUN2014 Chris Wang							
				0 PLC ±-		1 PLC ±-		APVD 18JUN2014 Xiang Xu		NAME CEM/DEM HEE PIN CONTACT			
				2 PLC ±-		3 PLC ±-		PRODUCT SPEC 108-106137					
		4 PLC ±-		ANGLES ±-		APPLICATION SPEC 114-106137		SIZE A3					
		MATERIAL -		FINISH -		WEIGHT -							
						Customer Drawing		SCALE 4:1 SHEET 1 OF 1 REV A1					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[CEM-1.5](#)