

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20


© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.




REVISIONS

| P | LTR | DESCRIPTION               | DATE      | DWN | APVD |
|---|-----|---------------------------|-----------|-----|------|
|   | C2  | REVISED PER ECO-14-015436 | 13OCT2014 | NK  | MM   |
|   |     |                           |           |     |      |
|   |     |                           |           |     |      |
|   |     |                           |           |     |      |

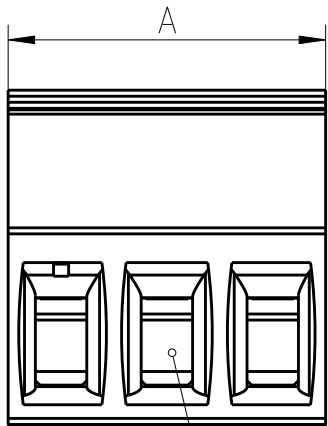


WIRE ENTRY

MATING FACE

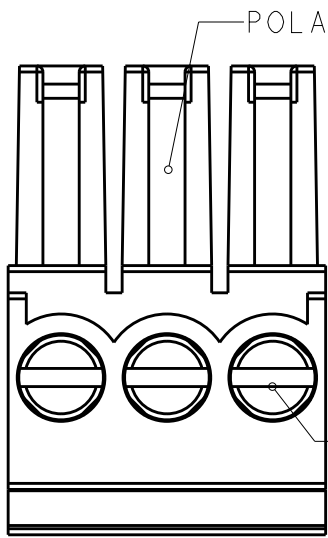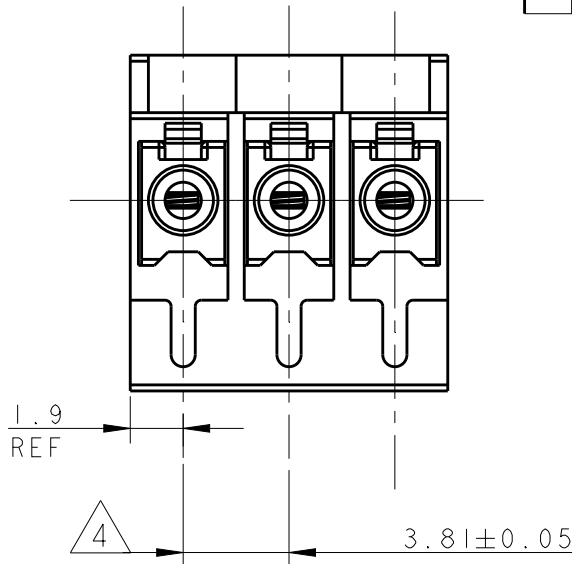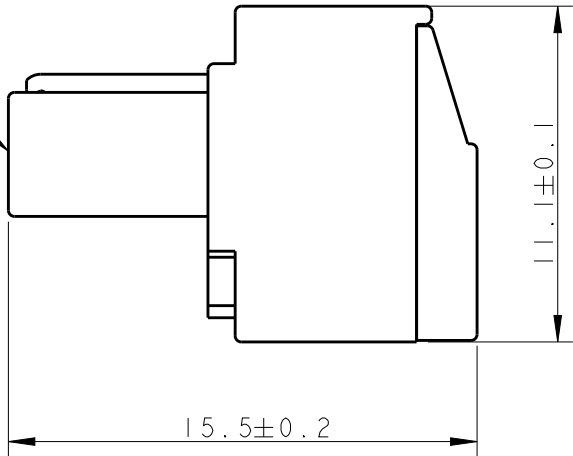

POLARIZATION KEY SLOT

CLAMPING SCREW

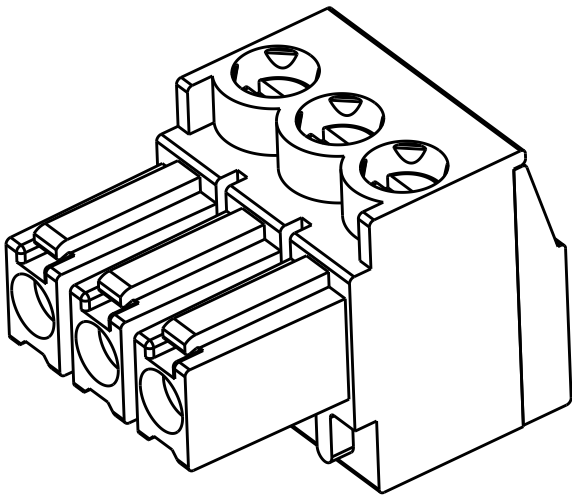


284507-3 AS SHOWN

- 1 MATERIALS AND FINISH  
HOUSING: PA 6.6, UL 94-V0, COLOR GREEN  
CLAMP: BRASS, NICKEL PLATED  
TERMINAL: BRASS, TIN PLATED  
CONTACT SPRING: PHOSPHOR BRONZE, TIN PLATED  
CLAMPING SCREW: M2, BRASS, NICKEL PLATED
- 2 END-TO-END STACKABLE WITHOUT LOSS OF CENTERLINE SPACING
- 3 WIRE SIZE RANGE  
14 - 30 AWG
- 4 NOT CUMULATIVE TOLERANCE
- 5 HOUSING: PA 6.6, UL 94-V0, COLOR: RED
- 6 PRELIMINARY - NOT RELEASED FOR PRODUCTION

|   |   |       |           |             |
|---|---|-------|-----------|-------------|
| 6 | 5 | 19.05 | 5         | 3-284507-5  |
|   |   | 10.5  | 4         | 3-284507-4  |
|   |   | 7.0   | 3         | 3-284507-3  |
|   |   | 95.25 | 25        | 2-284507-5  |
|   |   | 91.44 | 24        | 2-284507-4  |
|   |   | 87.63 | 23        | 2-284507-3  |
|   |   | 83.82 | 22        | 2-284507-2  |
|   |   | 80.01 | 21        | 2-284507-1  |
|   |   | 76.20 | 20        | 2-284507-0  |
|   |   | 72.39 | 19        | 1-284507-9  |
|   |   | 68.58 | 18        | 1-284507-8  |
|   |   | 64.77 | 17        | 1-284507-7  |
|   |   | 60.96 | 16        | 1-284507-6  |
|   |   | 57.15 | 15        | 1-284507-5  |
|   |   | 53.34 | 14        | 1-284507-4  |
|   |   | 49.53 | 13        | 1-284507-3  |
|   |   | 45.72 | 12        | 1-284507-2  |
|   |   | 41.91 | 11        | 1-284507-1  |
|   |   | 38.10 | 10        | 1-284507-0  |
|   |   | 34.29 | 9         | 284507-9    |
|   |   | 30.48 | 8         | 284507-8    |
|   |   | 26.67 | 7         | 284507-7    |
|   |   | 22.86 | 6         | 284507-6    |
|   |   | 19.05 | 5         | 284507-5    |
|   |   | 15.24 | 4         | 284507-4    |
|   |   | 11.43 | 3         | 284507-3    |
|   |   | 7.62  | 2         | 284507-2    |
|   |   | DIM A | NO OF POS | PART NUMBER |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:  
mm



MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±  
1 PLC ±0.30  
2 PLC ±0.25  
3 PLC ±  
4 PLC ±  
ANGLES ±2°

FINISH

DWN 05FEB2002

E. ZANOLINI

CHK 05FEB2002

E. ZANOLINI

APVD 05FEB2002

D. BIEVENOUR

PRODUCT SPEC

108-20166

APPLICATION SPEC

114-20079

WEIGHT

-

CUSTOMER DRAWING



TE Connectivity

NAME

TERMINAL BLOCK PLUG  
STACKING  
3.81mm PITCH

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779

C-284507

-

SCALE

4:1

SHEET

OF

REV

C2

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-284507-3](#)