




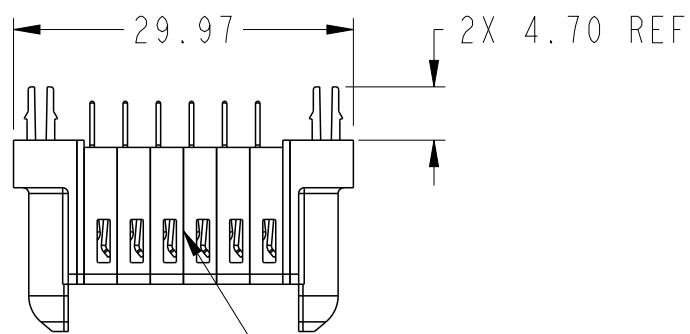


Copyright FCI.

PRODUCT NUMBER SEE SHEET 2

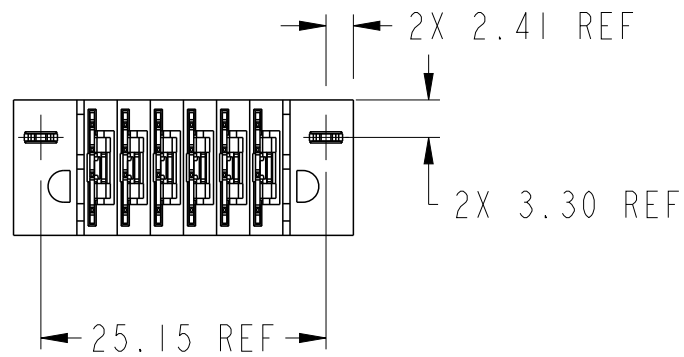


NOTE 1

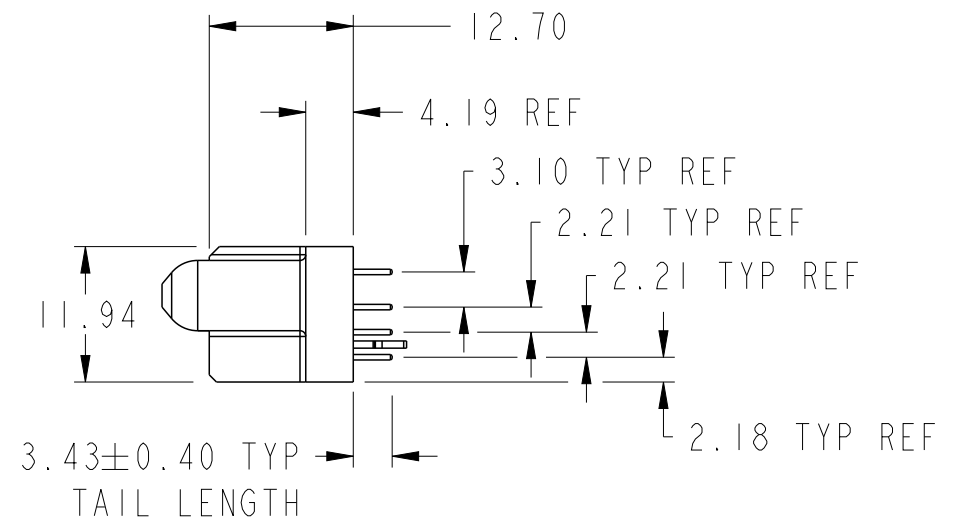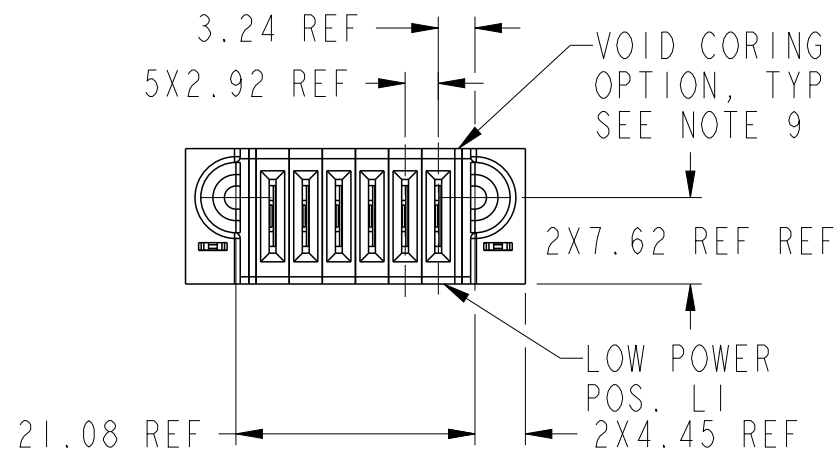




spec ref				dr	Eddy Zeng	2013/11/11	<div>projection</div> <div></div>	<div>MM</div> <div></div>	size	A3	scale	3:2	
tolerance std ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Xie Bob	2013/11/15			ecn no				-
				chr	Li-He	2013/11/15			rel level				Released
				appr	Pei-Ming Zheng	2013/11/15			product family		PowerBlade+		
surface 	linear	0.X	±0.50		title 6LP VT STB RECEPTACLE				dwg no	10106268-0600001			rev A
		0.XX	±0.25										
		0.XXX	±0.10										
	ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.		Product - Customer Drw				sheet 1 of 3	

PRODUCT NO.	ROWS	LP							
		E1	P6	P5	P4	P3	P2	P1	E2
10106268-0600001LF	D C B A		L	R	L	R	L	R	L

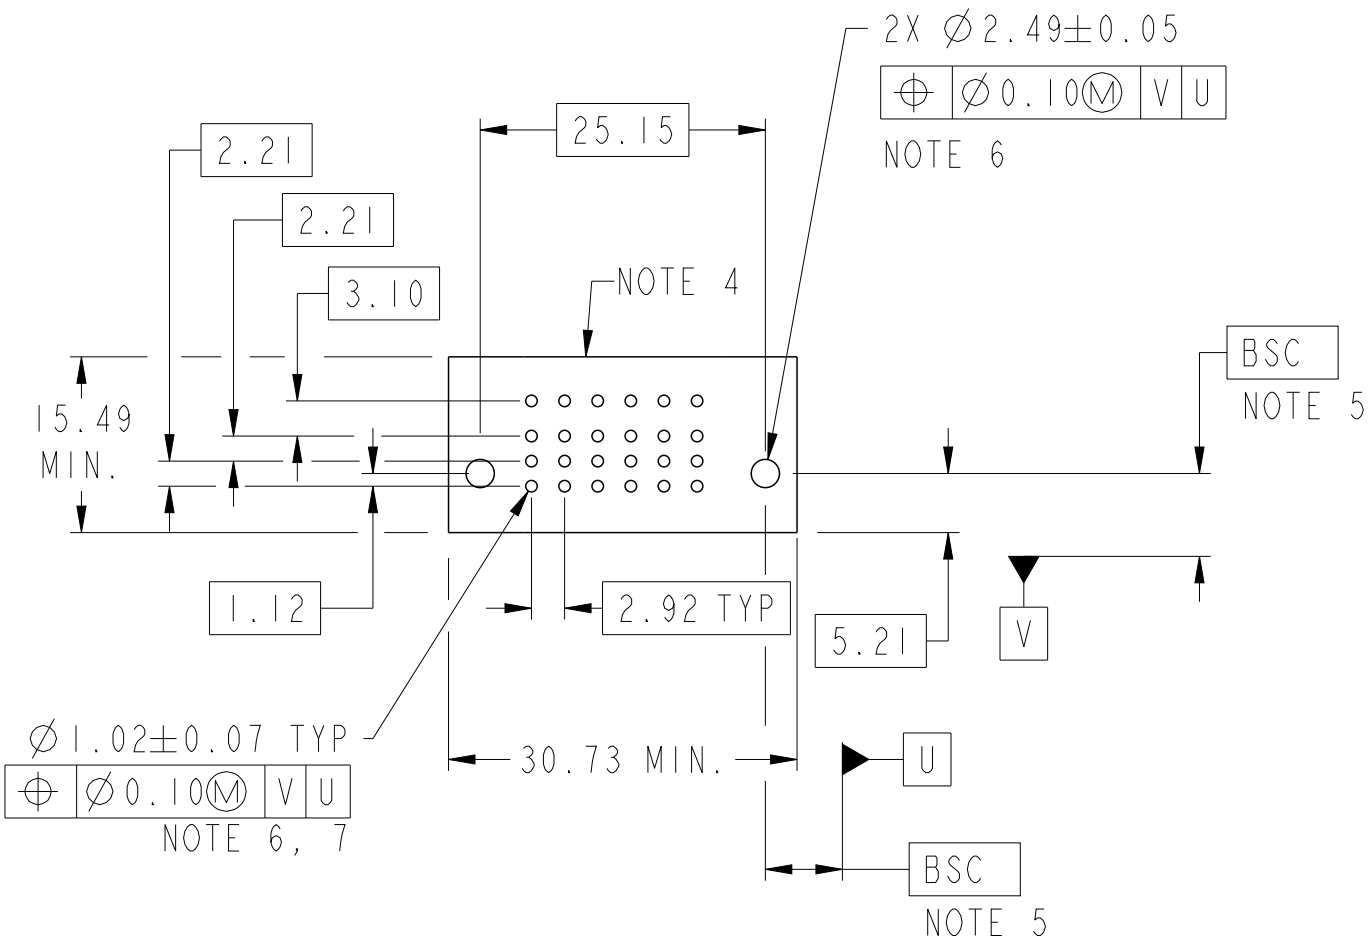CODE	DESCRIPTION
HA	METAL HOLD DOWN
LR	STD LOW POWER CONTACT (3.43)



dr	Eddy Zeng	2013/11/11	<div>projection</div> <div></div>	<div>MM</div> <div></div>	size	A3	scale	3:2
eng	Xie Bob	2013/11/15			ecn no		-	
chr	Li- He	2013/11/15			rel level			
appr	Pei-Ming Zheng	2013/11/15	product family		PowerBlade+		Released	
	title 6LP VT STB RECEPTACLE			dwg no 10106268-0600001			rev	
							A	
www.fci.com	cat. no.		Product - Customer Drw				sheet 2 of 3	



Copyright FCI.

A

B

C

D

A

B

C




D

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL
MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE
MAY BE DIFFERENT FOR OPTIMIZE THE MOLDING PROCESS. THE
VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.



Copyright FCI.

dr	Eddy Zeng	2013/11/11	<div>projection</div> <div></div>	<div>MM</div> <div></div>	size	A3	scale	1:1
eng	Xie Bob	2013/11/15			ecn no		-	
chr	Li- He	2013/11/15			rel level			
appr	Pei-Ming Zheng	2013/11/15	product family		PowerBlade+		Released	
<div></div>			title		6LP		dwg no	
			VT STB RECEPTACLE		10106268-0600001		rev	
							A	
www.fci.com			cat. no.		Product - Customer Drw			sheet 3 of 3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[10106268-0600001LF](#)