


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE SIZE AWG	DIMENSIONS - in [mm]			
		A ± .03 [0,8]	B ± .01 [0,3]	C ± .01 [0,3]	D ± .03 [0,8]
BSN22	26-22	.79 [20,1]	.08 [2,0]	.04 [1,0]	.47 [11,9]

INSTALLATION TOOLS
CT-520
CT-1525 (A POCKET)
CT-2500 (CT-2525CH: A PKT)

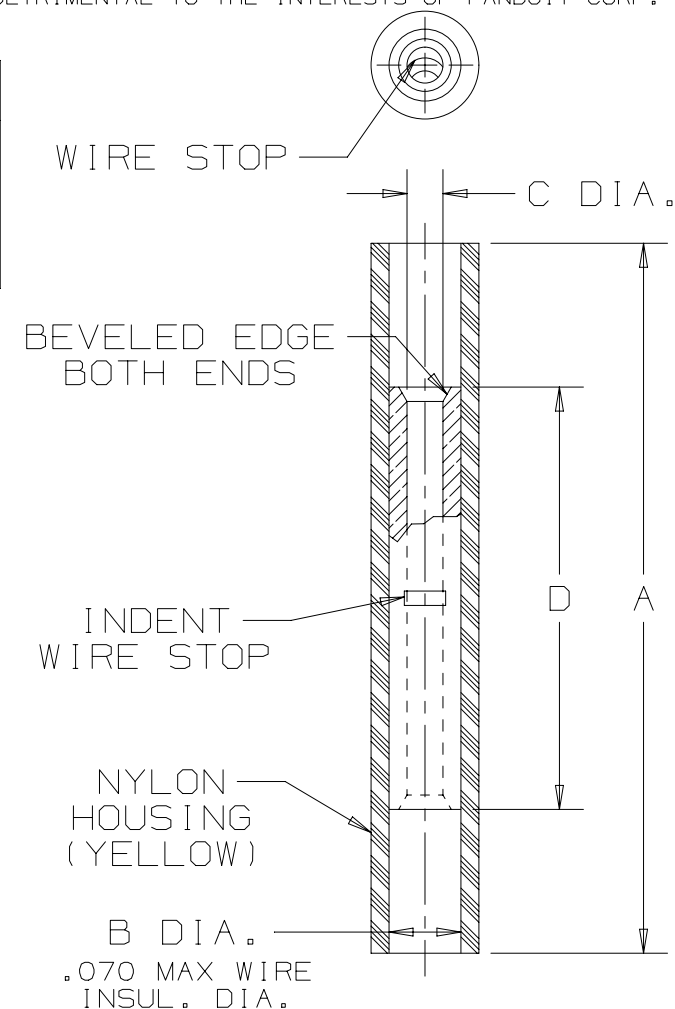

NOTES:

- RECOMMENDED FOR:
 - #26-22 AWG SOLID OR STRANDED COPPER WIRE
 - 221°F [105°C] MAX TEMP. RATING
 - 600V MAX VOLTAGE RATING
- MATERIAL:
 - STAMPING: .02" [0,5] THK COPPER, TIN PLATED
 - HOUSING: NYLON, YELLOW
- SEE www.panduit.com FOR PACKAGE QUANTITIES
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- WIRE STRIP LENGTH: $1/4" \begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$ [6,4mm $\begin{smallmatrix} +0,8 \\ -0 \end{smallmatrix}$]

TITLE		BUTT SPLICE, NYLON INSULATED #26-22 AWG	
CONTROL DRAWING		PANDUIT	
ITEM REVISION NAME		N41337BA/08	
DATASET FILE NAME		N41337BA-DC/08	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:	
.x ± .1 [2.54] .xx ± .01 [.25]		SEE NOTES	
.xxx ± .005 [.127] ANGLES ± 5 °		DRAWING NUMBER:	
THIRD ANGLE PROJECTION		A41337	
DRAWN BY	DATE	CHK	SCALE
DAW	-	-	NONE
SHT 1 OF 1		SIZE	
		A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
08	4-27-15	JHNU	TMR	RGB	ADDED A POCKET NOTE, MAX INSUL DIA AND 600V RATING	A41337
07	04-25-13	JBN	RTFI	RTFI	UPDATED DRAWING BORDER & TITLE BLOCK	A41337