


Snap Action Switches




Specifications:



Rating	: 30V dc, 500mA.
Maximum initial contact resistance	: 100mΩ.
Minimum insulation resistance	: 100MΩ at 250V dc.
Dielectric strength	: 500V ac for 1 minute.
Temperature range	: -15 to +70°C.
Maximum operating force	: 50 to 120gf.
Minimum switch life	: 100,000 cycles (#Up to 250K life cycles upon request).
Housing	: PBT.
Cover	: PBT.
Lever	: PBT.
Actuator	: POM.
Contacts	: Silver alloy.
Terminals	: Brass, silver plated.

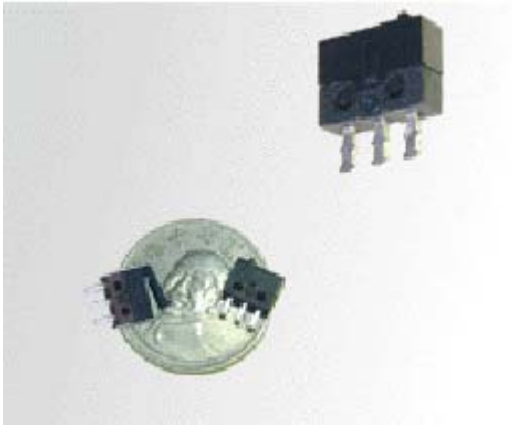

SSM-001

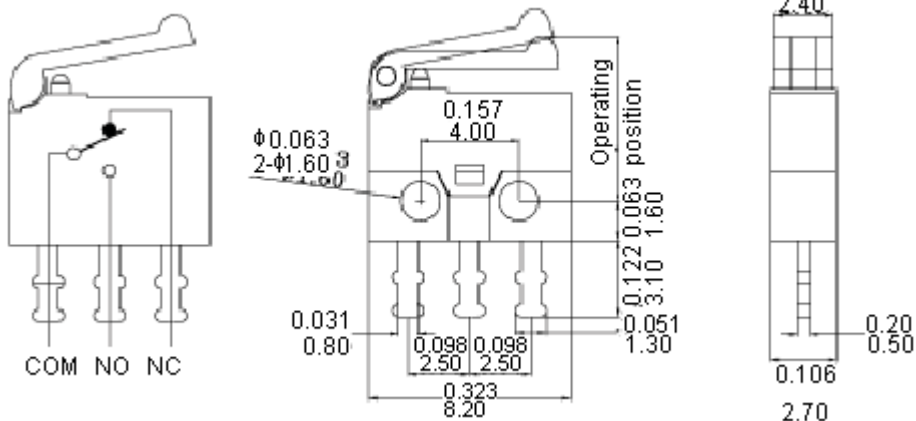

Snap Action Switches

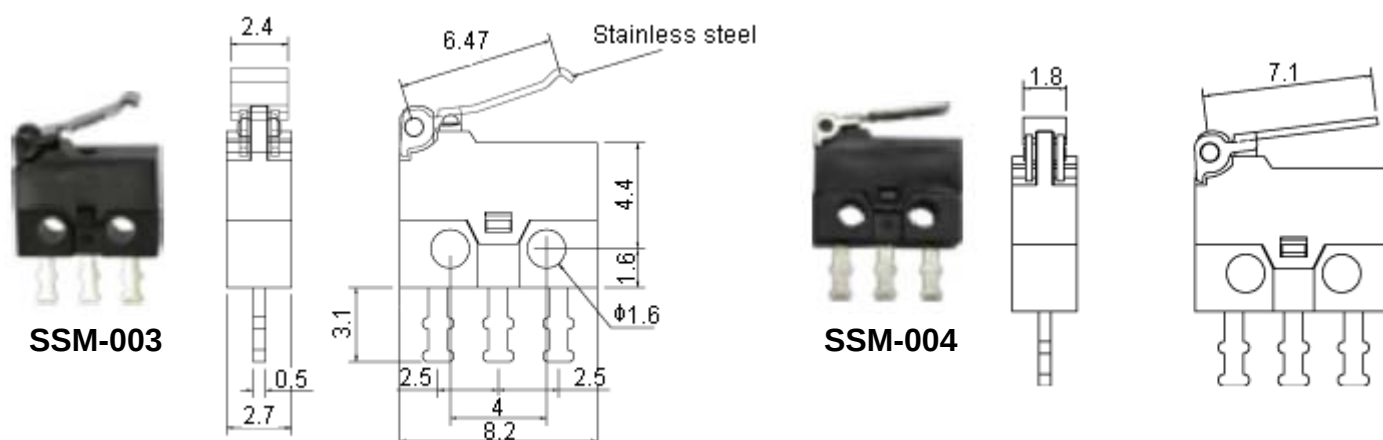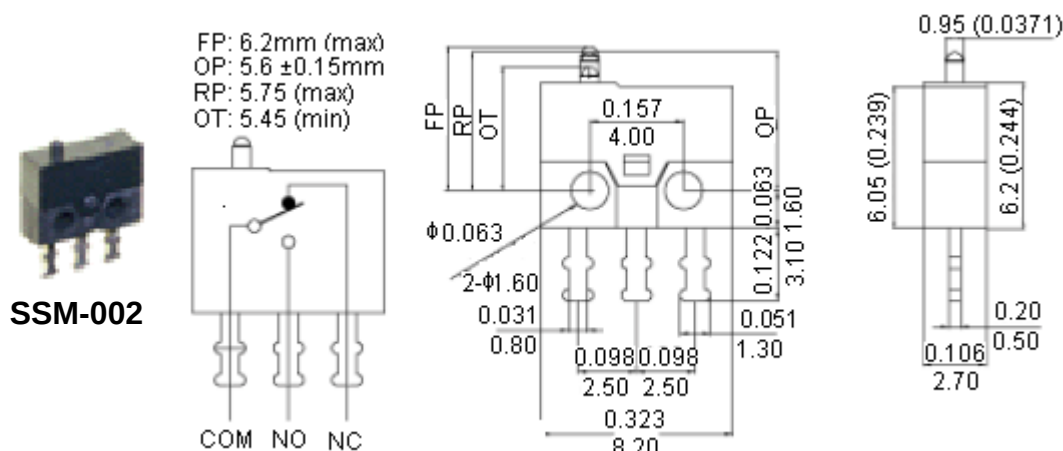

Part Number Table

Description	Part Number
Microswitch, SPDT, 0.5A, Plastic Lever	SSM-001
Microswitch, SPDT, 0.5A, Without Lever	SSM-002
Microswitch, SPDT, 0.5A, Metal Lever	SSM-003
Microswitch, SPDT, 0.5A, Steel Lever	SSM-004

Disclaimer This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SPC Multicomp is the registered trademark of the Group. © Premier Farnell plc 2009.