




Connectors > Lighting Connectors > Ballast Connectors

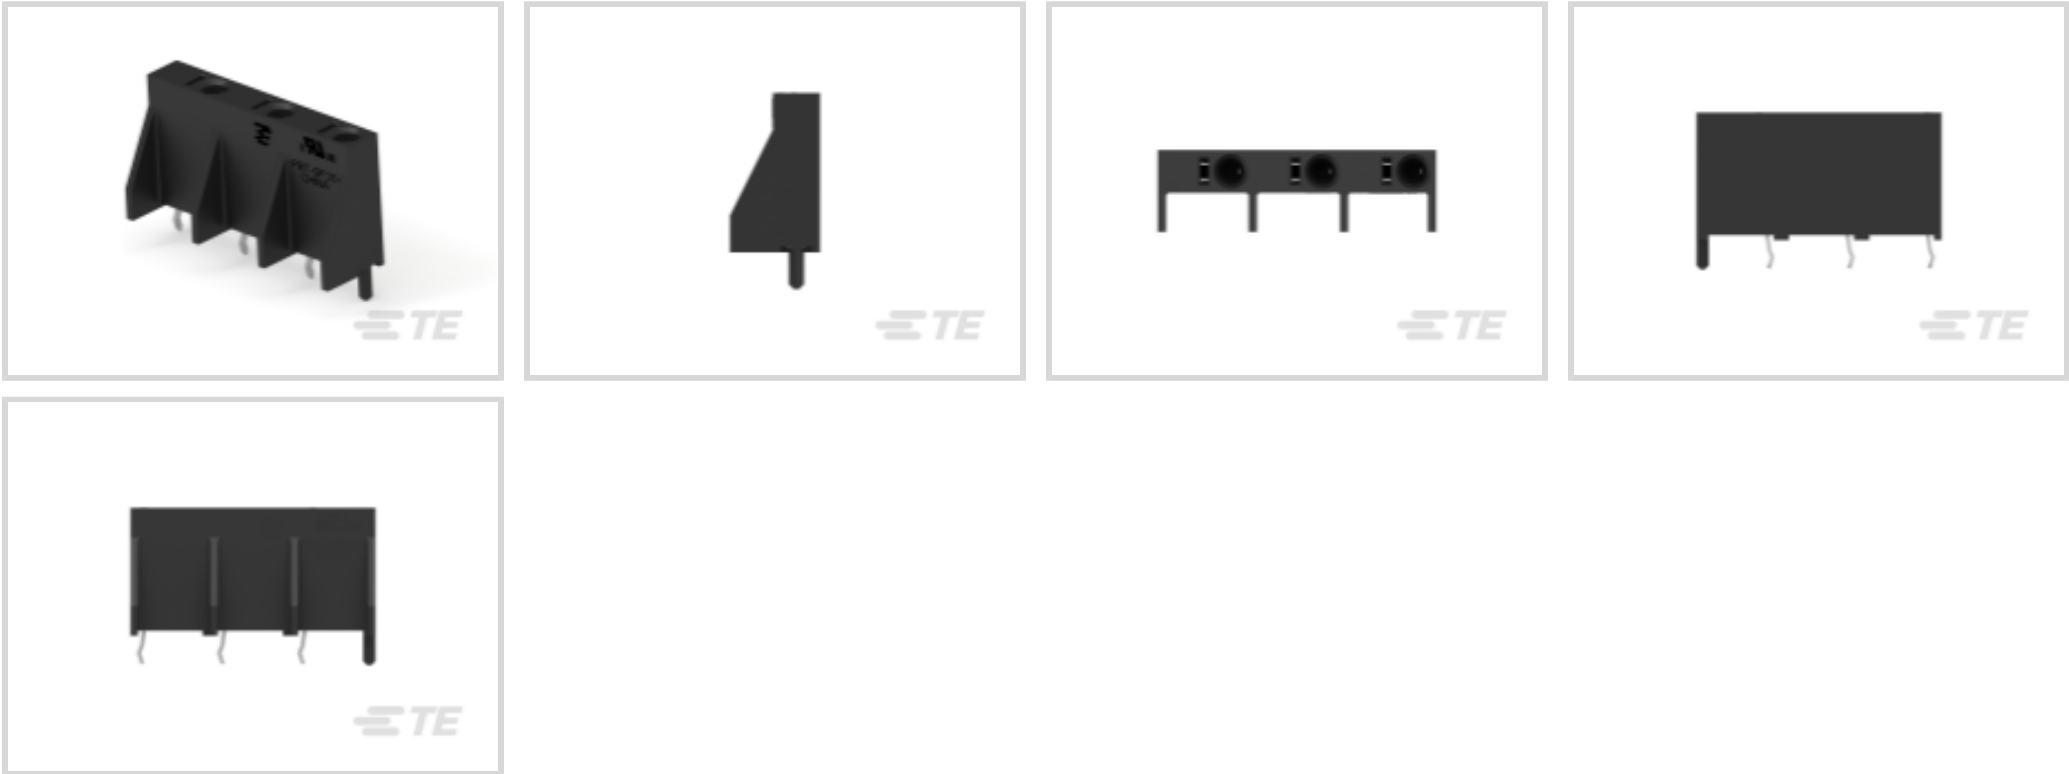

Lighting Product Type: **Connector**
Termination Method to Wire & Cable: **Poke-In**
Lighting Connector Type: **Header**
Connector System: **Wire-to-Board**
Number of Positions: **3**

Features

Product Type Features

Lighting Connector Style	Screwless Wire
Lighting Product Type	Connector
Lighting Connector Type	Header
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Rows	1
Number of Positions	3

Electrical Characteristics

Operating Voltage (Max)	600 VDC
-------------------------	---------

Body Features

Primary Product Material	PBT GF
Primary Product Color	Black



Contact Features

Contact Layout	Inline
Wire Contact Termination Area Plating Thickness	3.05 μm[120 μin]
Wire Contact Termination Area Plating Material Finish	Matte
Wire Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	2.03 – 3.05 μm[79.92 – 120.08 μin]
Contact Mating Area Plating Material	Tin
Contact Mating Area Plating Material Finish	Matte
Contact Current Rating (Max)	6 A

Termination Features

Termination Method to PCB	Through Hole - Solder
Termination Method to Wire & Cable	Poke-In

Mechanical Attachment

PCB Mount Alignment	With
PCB Mount Retention	With
PCB Mount Retention Type	Boardlock
Connector Mounting Type	Board Mount

Housing Features

Centerline (Pitch)	8.2 mm[.323 in]
--------------------	-----------------

Dimensions

Connector Length	25 mm[.984 in]
Post-Mating Assembly Measurement	25 mm[.984 in]
Connector Height	13 mm[.512 in]
Connector Width	7.35 mm[.289 in]
PCB Thickness (Recommended)	1.8 mm[.07 in]
Wire Size	18 AWG

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

--	--



Compatible With Approved Standards Products	CSA C22.2 No. 182.3, UL 1977
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Method	Box & Tray, Tray
------------------	------------------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 1-2008552-2
CONNECTOR, INLINE VERT
SCREWLESS

TE Part # 2213629-3
ASY,IN-LINE VERT SCRLESS,SPECIAL
PACK

Customers Also Bought






TE Part #T4145035041-001
M12 R/A F PNL STAMPED PIN A-
CODE 4P SHLD



TE Part #9-1393116-1
KUMP-14D18-24=KU



TE Part #1-2008552-2
CONNECTOR, INLINE VERT
SCREWLESS



TE Part #282842-3
TERMI-BLOK PCB MOUNT 90 3P.




TE Part #2307817-4
4P,2MM,BB,REC,DRVT,SMD,0.1AU,TR,
W/CP



TE Part #322419
TERMINAL,BUDG R 16-14 4



TE Part #EM7493-000
X2-12.0-0-FSP-SM

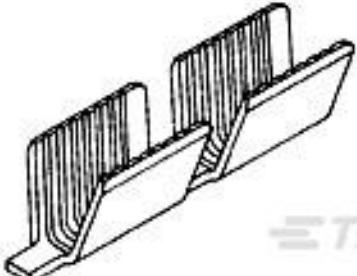

TE Part #62000-2
SPLICE AMVAR 600-3000 020TPBR



TE Part #1-2834291-1
3.96MM VER DIP WTB W LATCH.
2P_NATURAL

TE Part #1969365-1
ASY,SCRLESS WIRE CONN,VERT,6P

Documents

Product Drawings

ASSY,IN-LINE VERT SCREWLESS WIRE

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2008552-3_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2008552-3_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2008552-3_A.3d_stp.zip

English

3D PDF

3D



Customer View Model

[ENG_CVM_2008552-3_A2.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_2008552-3_A2.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_2008552-3_A2.2d_dxf.zip](#)

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Vertical and In-Line Screwless Wire Connectors](#)

English

Product Specifications

[Application Specification](#)

English

Agency Approvals

[UL Report](#)

English