

NEW PRODUCT INFORMATION

San Ace 92 AD AC Fan

SANYO DENKI EUROPE SA. is pleased to introduce its **San Ace 92AD** AC fan, measuring 92mm square by 38mm thick. This fan works while internally converting AC power into DC power and provides the superior performance of a DC fan with the flexibility of AC input.



Product Features


- 1 Low Power Consumption**
up to 44% reduction
- 2 High Reliability**
expected life time 60,000 hours at 60°C
- 3 Wide Range of Input Voltage**
rated voltage 100 to 240VAC
- 4 Stable Rotating Speed**
even at different input voltage and frequency conditions

How to read Model Number*


9AD	09	01	H	12	
Series name / frame material		Frame thickness		Sensor	
9AD Plastic		01 38mm		12 no sensor 1H low speed	
		Frame size		Speed code	
		09 92x92mm 12 120x120mm		H, M	
				Frame type	
				1 ribless plastic frame	

(*) contact us for available model numbers

9AD Product Range

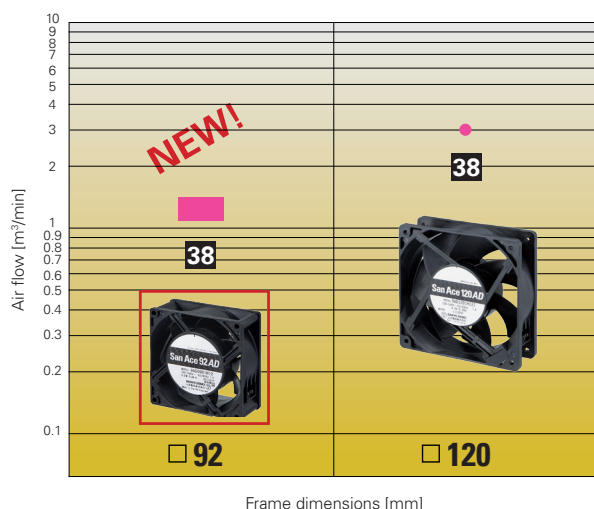

Performance Comparison

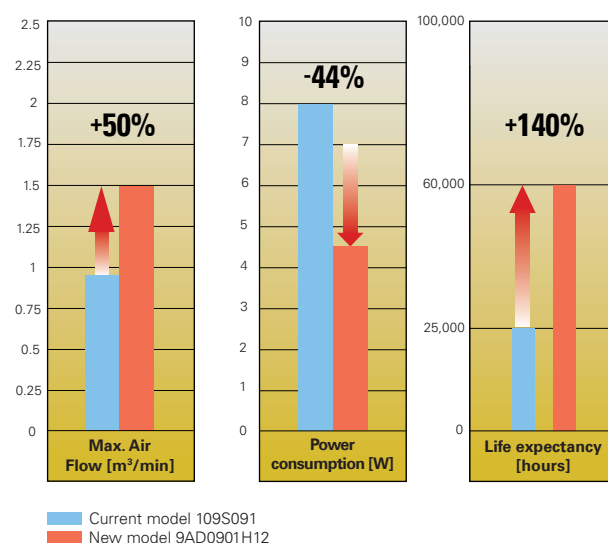

Main Specifications 9AD serie

- Size 2 sizes: 92 and 120mm square by 38mm thickness
- Air flow from 1.18 to 3m³/min - 41.7 to 106CFM
- Static pressure from 56 to 90Pa
- Rated voltage 100 to 240VAC
- Expected life time 60,000 hours at 60°C
- Sensor low speed sensor (in option)

Target Applications

- Industry and factory automation
- Cabinets
- Air ventilation
- Measuring instruments
- Data storage
- PV inverters...

AC Fan

San Ace 92AD

Features

Low Power Consumption

Power consumption is reduced by approximately 44% compared with our conventional AC fan.*

High Airflow and Static Pressure

The maximum airflow of the San Ace 92AD type is approximately 1.5 times and the maximum static pressure is approximately 2.3 times higher than that of our conventional AC fan.*

Long Life

The San Ace 92AD type has an expected life of 60,000 hours (approximately 6 years), approximately 2.4 times that of our conventional AC fan.*

Wide Range

A rated voltage range of 100 to 240 VAC allows for usage in both 100 VAC and 200 VAC systems. Rotation speed remains constant even at different input voltages.

*: Our conventional AC fan is 92 x 92 x 25 mm "San Ace 92", Model No. 109S091 (50Hz 100V).



92×92×38mm

Specifications

The model no. below has **ribs and no sensors**. For models without ribs, append "1" to the model no.

Model No.	Rated voltage [V]	Operating voltage range [V]	Frequency ^(Note) [Hz]	Rated current [A]	Rated input [W]	Rated speed [min ⁻¹]	Max. Airflow [m ³ /min] [CFM]	Max. Static pressure [Pa] [inchH ₂ O]	SPL [dB(A)]	Operating temperature [°C]	Expected life [h]
9AD0901H12	100 to 240	90 to 264	50 / 60	0.08	4.5	3,850	1.50 53.0	90 0.36	40	-20 to +75	60,000 / 60 °C
9AD0901M12				0.06	3.0	3,100	1.18 41.7	56 0.22	33		

Note: 50/60 Hz compatible.

The model no. below has **ribs and low-speed sensors**. For models without ribs, append "1" to the model no.

Model No.	Rated voltage [V]	Operating voltage range [V]	Frequency ^(Note) [Hz]	Rated current [A]	Rated input [W]	Rated speed [min ⁻¹]	Max. Airflow [m ³ /min] [CFM]	Max. Static pressure [Pa] [inchH ₂ O]	SPL [dB(A)]	Operating temperature [°C]	Expected life [h]
9AD0901H1H	100 to 240	90 to 264	50 / 60	0.08	4.5	3,850	1.50 53.0	90 0.36	40	-20 to +75	60,000 / 60 °C
9AD0901M1H				0.06	3.0	3,100	1.18 41.7	56 0.22	33		


Note: 50/60 Hz compatible.

Common Specifications


- ☐ Material Frame: Plastics (Flammability: UL94V-0), Impeller: Plastics (Flammability: UL94V-0)
- ☐ Expected Life Refer to specifications
(L10: Survival rate: 90% at 60 °C, rated voltage, and continuously run in a free air state)
- ☐ Motor Protection System Burnout protection at locked rotor condition
- ☐ Dielectric Strength 50/60 Hz, 1,500 VAC, 1 minute
(between power terminal and frame or between lead conductor and frame)
- ☐ Sound Pressure Level (SPL) Expressed as the value at 1 m from air inlet side
- ☐ Operating Temperature Refer to specifications (Non-condensing)
- ☐ Storage Temperature -30 °C to +75 °C (Non-condensing)
- ☐ Mass Approx. 250 g

Dimensions (unit: mm) (With ribs)


Standard

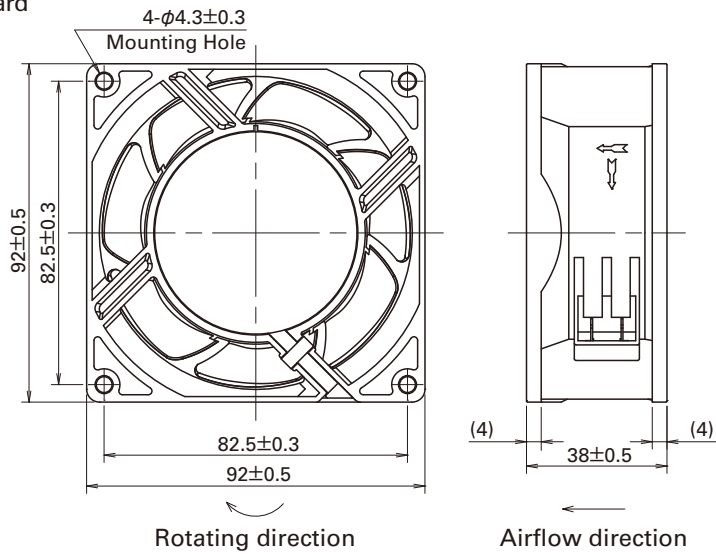

with Sensor

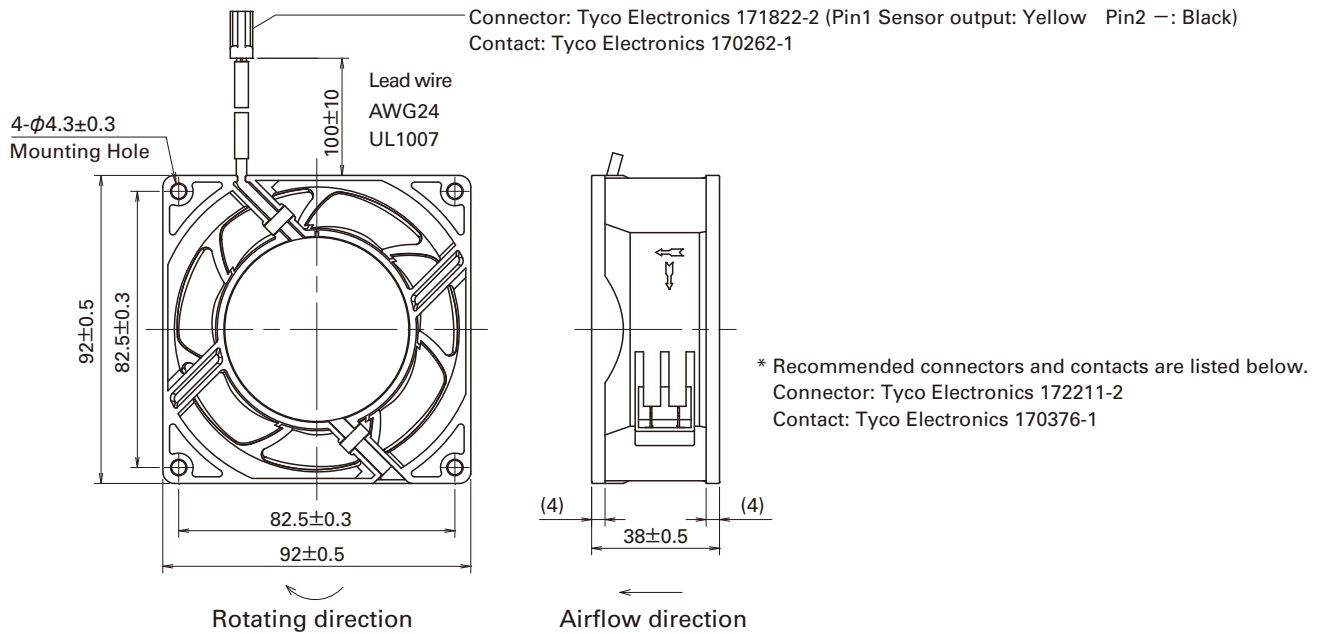

Reference Dimension of Mounting Holes and Vent Opening (unit: mm)

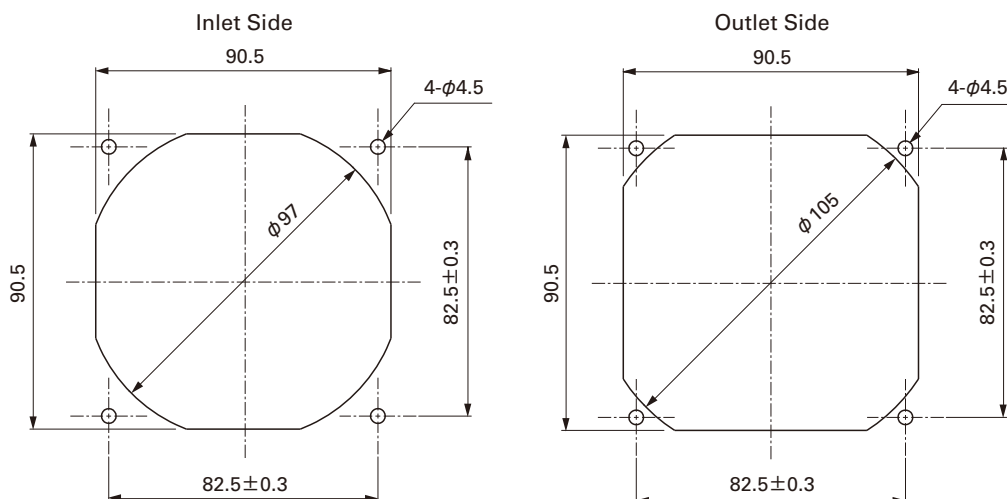


Option (unit: mm)

Plug cord

Model: 489-1635-L10, 489-1635-L21


Products compliant with Electrical Appliance and Material Safety Law,
UL/CSA [c-UL] Certified UL FILE No.E43202

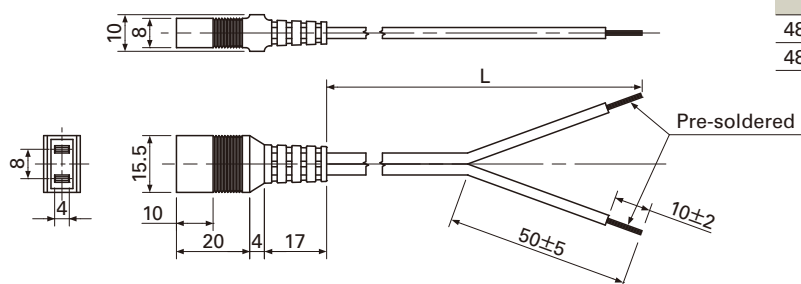

Model	Power cord length (L) [mm]	Mass [g]
489-1635-L10	1,000	38
489-1635-L21	2,100	74

Resin filter kits

Model: 109-1001F13 (13PPI), 109-1001F20 (20PPI), 109-1001F30 (30PPI), 109-1001F40 (40PPI)

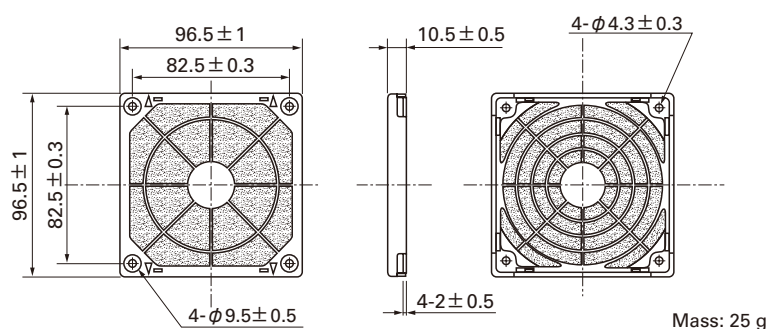

Finger guards



Model: 109-099C Surface treatment: Nickel-chrome plating (silver)

Color

Model: 109-099E
: 109-099H

Surface treatment: Nickel-chrome plating (silver)
: Cation electropainting (black)

Color

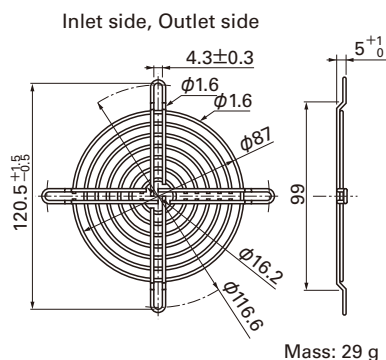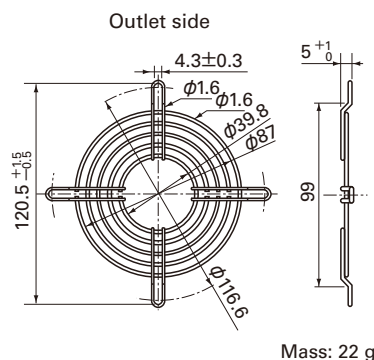

Notice

- Please read the "Safety Instructions" on our website once you have decided on a product for use.
- The products shown in this catalog are subject to Japanese Export Control Law. Diversion contrary to the law of exporting country is prohibited.
- To protect against electrolytic corrosion that may occur in locations with strong electromagnetic noise, we provide fans that are unaffected by electrolytic corrosion.

SANYO DENKI CO., LTD. 3-33-1, Minami-Otsuka, Toshima-ku, Tokyo, 170-8451, Japan TEL: +81 3 5927 1020

<http://www.sanyodenki.com>

The names of companies and/or their products specified in this catalog are the trade names, and/or trademarks and/or registered trademarks of such respective companies.
"San Ace" is a trademark of SANYO DENKI CO., LTD.

Specifications are subject to change without notice.

CATALOG No. C1051B001 '15.6