

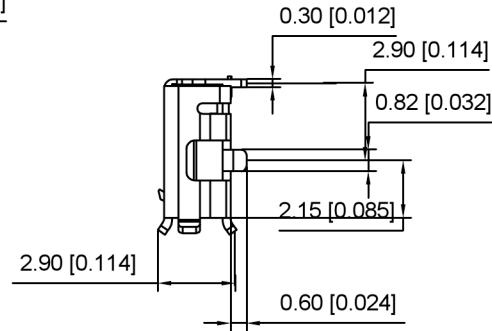
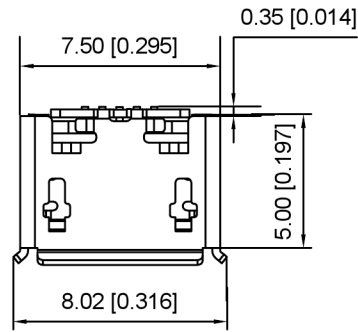
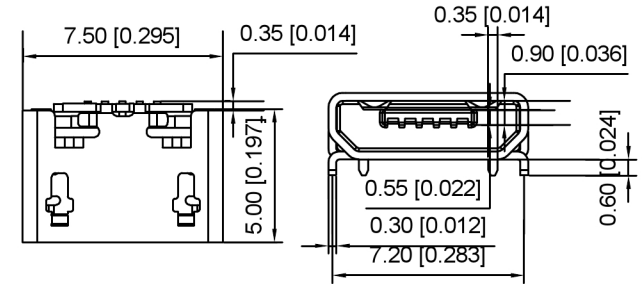
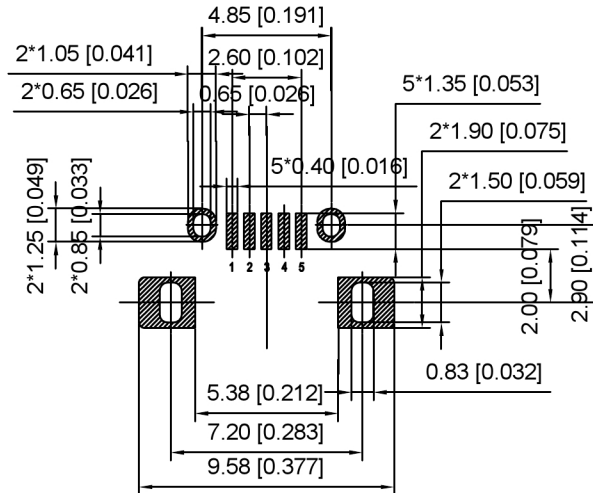



Scrolls (S)

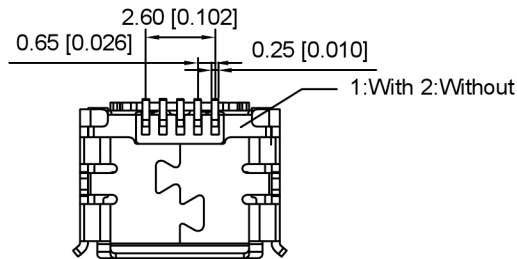

Flat(F)

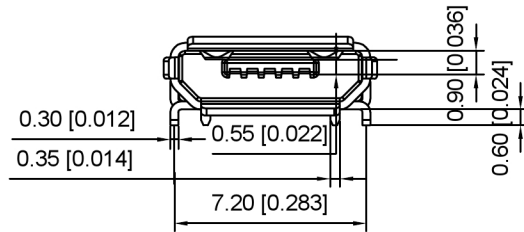

RECOMMENDED PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCES:±0.05

Material

Housing Material: LCP, UL94V-0, black

Contact Terminal: Copper Alloy

Metallic Shell: Sus

Electrical

Voltage Rating: 30 V AC

Current Rating: Signal (Pins 2,3,4): 1.0A, Power (Pins 1,5): 1.8A

Contact Resistance: 30mΩ Max

Insulation resistance: 1000MΩ Min

Dielectric withstanding voltage: 250V AC/Minute

Mechanical

Durability: 10,000 cycles

Mating Force: 35N (3.57Kgf) Max

Unmating Force: 8N (0.82Kgf) Min.

U254-05XX-4BHJ25-X2S

1:AU 1U"

6:AU 30U"

T:TIN

N:NICKEL

S:Sus

2:Without

S:Scrolls F:Flat

DSND		SCALE: N/A	MODEL TYPE: MICRO USB
DWN		VIEW:	PART NO.:
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	U254-05XX-4BHJ25-X2S
		WEIGHT	SHEET
			1/1
		REVISION	A0

XKB

XKB INDUSTRIAL PRECISION CO.,LIMITED

广东星坤科技股份有限公司

Δ×		
Δ×		
Δ×		
MARK	DESCRIPTION	DATE

文件工程章

REVISIONS
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

ANGULAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5

UNSPECIFIED TOLERANCES