


6		5		4		3		2		1	
ITEM	PART#	DESCRIPTION		QTY	UOM			FROM	TO	DESCRIPTION	COLOUR
A	5024390600	2.0 W/B Single Plug Hsg 6Ckt		1	PC			A1	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
B	5024380000	2.0 W/B Single Plug Term W/Plt Chain		6	PC			A2	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
C	--	WHITE PART ID LABEL		1	PC			A3	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
								A4	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
								A5	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
								A6	--	1X22AWG DISC SR-PVC BK UL10002	BLACK

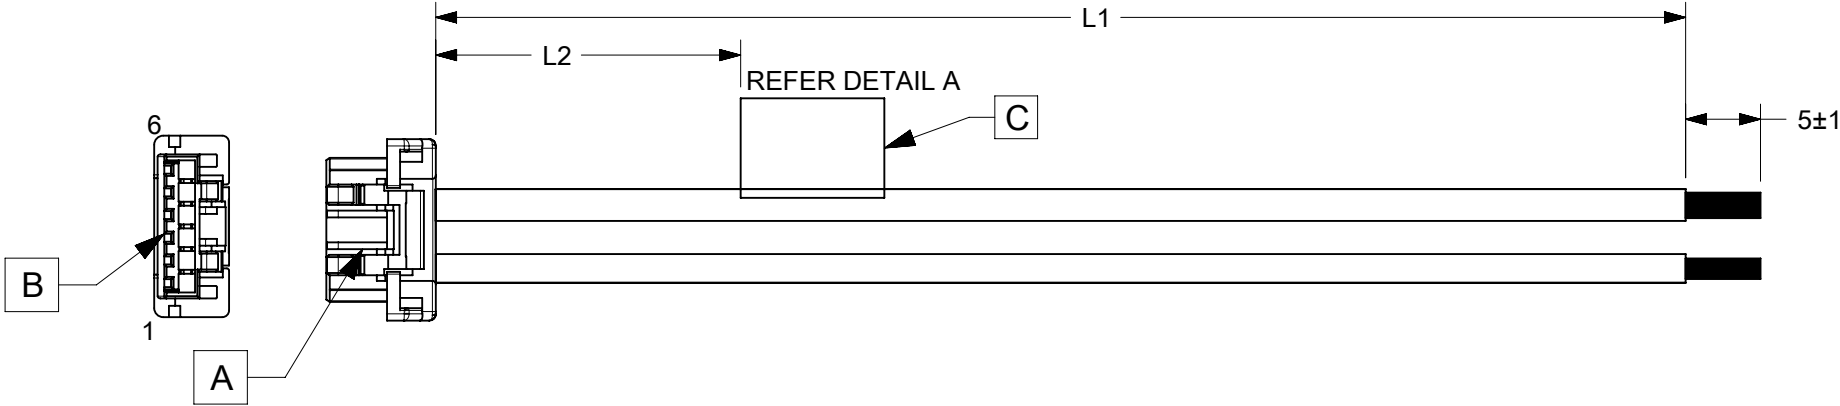

PART NUMBER	TITLE	L1	L2(REF)
2219591060	Clik-Mate 2.0 R-S 6ckt 50mm disc Sn	50±5	15
2219591061	Clik-Mate 2.0 R-S 6ckt 100mm disc Sn	100±5	15
2219591062	Clik-Mate 2.0 R-S 6ckt 150mm disc Sn	150±5	15
2219591063	Clik-Mate 2.0 R-S 6ckt 300mm disc Sn	300±5	15
2219591064	Clik-Mate 2.0 R-S 6ckt 600mm disc Sn	600±5	15

MOLEX P/N
MOLEX
BATCH WK/YR

DETAIL A

- NOTES
1. CABLE ASSEMBLY TO BE TESTED 100% FOR CONTINUITY AND POLARITY.
 2. CONNECTOR VIEW SHOWN IS FROM MATING SIDE.
 - 3.LABEL TEXT MUST BE 2 MM MAX. IN HEIGHT WITH ARIAL FONT.
 - 4.LABEL MUST BE WRAPPED IN FLAG TYPE ON A SINGLE CABLE.
 - 5.TINNING SHOULD BE DONE WITH LEAD FREE SOLDER BAR ONLY.
 - 6.FREE ENDS MUST BE STRIPPED,TWISTED & TINNED.
- THE LENGTH OF TINNING IS 5±1 MM.TINNING DIA MUST BE 0.9MM MAX.

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2022/02/12	A	INITIAL RELEASE	THANUB
DOCUMENT STATUS	P1	RELEASE DATE	2022/12/23 12:42:18

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
	DIMENSION UNITS	SCALE
	mm	NTS
	GENERAL TOLERANCES (UNLESS SPECIFIED)	
DIVISIONAL SYMBOLS	ANGULAR TOL	± °
	4 PLACES	±
	3 PLACES	±
	2 PLACES	±
	1 PLACE	±
	0 PLACES	±
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION
		DRAWING
	SERIES	DOCUMENT NUMBER