

Power Rocker Switch



Specifications:

Electrical:

Contact Rating	: 10A 125V AC / 250V AC 16A 250V AC
Contact Resistance	: 30MΩ
Insulation Resistance	: 100MΩ min. @ 500V DC
Dielectric Strength	: 2,000V AC For 1 Minute

Mechanical:


Operating Life	: 10,000 Cycles
Operating Force	: 800g ±300g

Environmental:

Operating Temperature	: -25°C to +85°C
Soldering	: 280°C For 3Sec

Material:

Housing and Actuator	: Nylon 66
Contact	: Copper, Silver Plated
Terminals	: Brass, Silver Plated

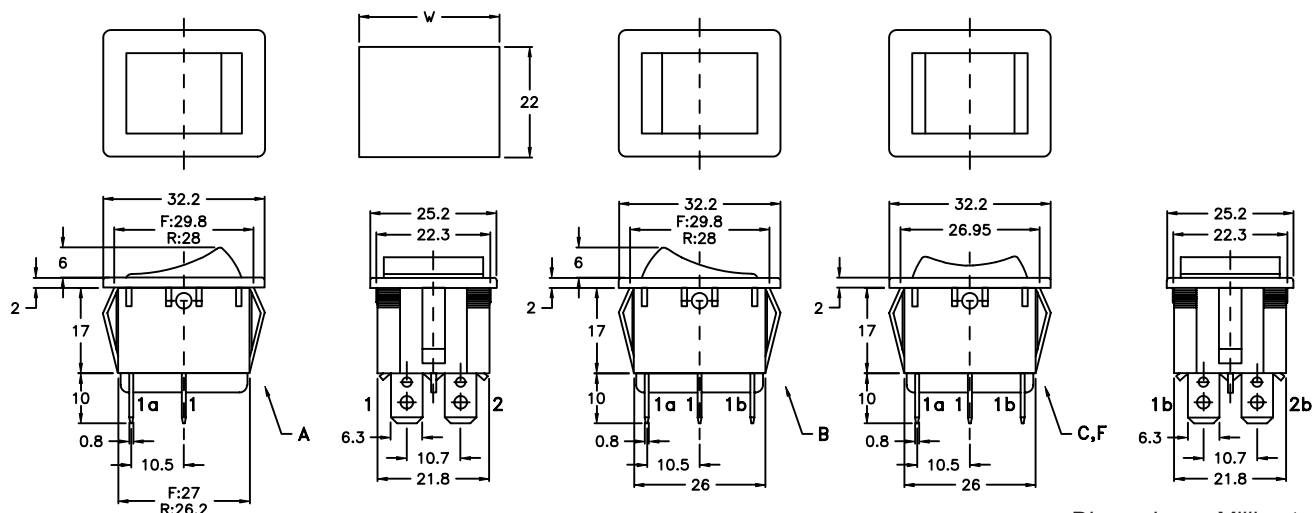

Dimensions : Millimetres

Part Number	Switching Type	Schematic
SPC21132	DPST ON-OFF	

Part Number Table

Description	Part Number
Power Rocker Switch	SPC21132

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.