




TE Internal #: 5406217-1

RJ45 Connector, Single Port, 1 x 1, Standard Connector Contact Density, Jack, Shielded, Cat 5e, Standard - Latch Down, 8 Position, Standard Profile

[View on TE.com >](#)

Connectors > Modular Jacks & Plugs > RJ45 Connectors

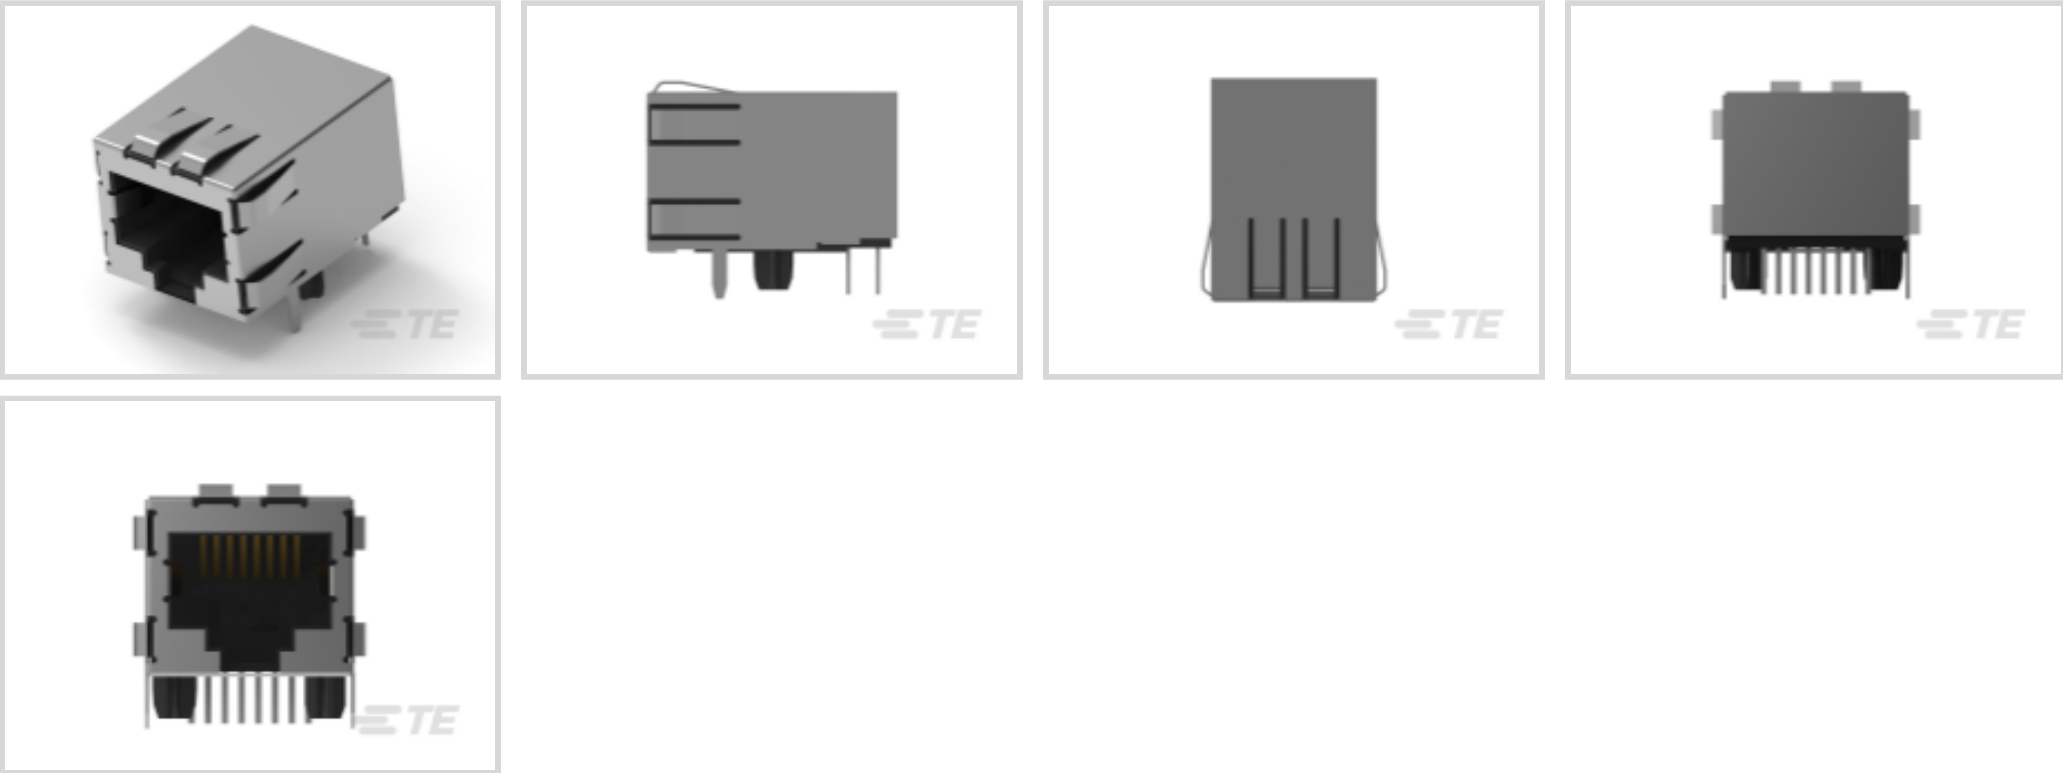

Modular Jack & Plug Interface Type: **RJ45**

Port Configuration: **Single Port**

Port Matrix Configuration: **1 x 1**

Modular Jacks & Plugs Products: **RJ Type Jacks & Plugs**

Connector Contact Density: **Standard**

Features

Product Type Features

|                                    |                       |
|------------------------------------|-----------------------|
| Connector Product Type             | Connector Assembly    |
| Modular Jack & Plug Interface Type | RJ45                  |
| Modular Jacks & Plugs Products     | RJ Type Jacks & Plugs |
| Modular Connector Style            | Jack                  |
| Grounding Options                  | PCB and Panel Ground  |
| Connector & Contact Terminates To  | Printed Circuit Board |

Configuration Features

|                            |                   |
|----------------------------|-------------------|
| Panel Ground Location      | Top and Side, Top |
| Number of PCB Ground Tabs  | 2                 |
| Port Configuration         | Single Port       |
| Port Matrix Configuration  | 1 x 1             |
| Connector Contact Density  | Standard          |
| Number of Positions        | 8                 |
| Number of Loaded Positions | 8                 |
| PCB Mount Orientation      | Right Angle       |



Body Features

|                                |                       |
|--------------------------------|-----------------------|
| PCB Ground Tab Location        | 4.57 mm[.18 in]       |
| Shield Plating Material        | Tin                   |
| Shield Material                | Copper Alloy          |
| Modular Jack Latch Orientation | Standard - Latch Down |
| Connector Profile              | Standard              |

Contact Features

|                                                |                 |
|------------------------------------------------|-----------------|
| Contact Underplating Material                  | Nickel          |
| PCB Contact Termination Area Plating Material  | Tin             |
| Contact Current Rating (Max)                   | .2 A, 1.5 A     |
| Contact Mating Area Plating Material           | Gold            |
| Contact Base Material                          | Phosphor Bronze |
| Contact Mating Area Plating Material Thickness | 1.27 µm[50 µin] |

Termination Features

|                                |                       |
|--------------------------------|-----------------------|
| Termination Method to PCB      | Through Hole - Solder |
| Termination Post & Tail Length | 3.56 mm[.14 in]       |

Mechanical Attachment

|                         |             |
|-------------------------|-------------|
| Panel Mount Feature     | With        |
| Connector Mounting Type | Panel Mount |

Housing Features

|                       |                        |
|-----------------------|------------------------|
| Mating Entry Location | Side                   |
| Centerline (Pitch)    | 1.02 mm[.04 in]        |
| Housing Color         | Black                  |
| Housing Material      | High Temperature Nylon |

Dimensions

|                             |                  |
|-----------------------------|------------------|
| PCB Thickness (Recommended) | 1.57 mm[.062 in] |
| Connector Height            | 13.72 mm[.54 in] |

Usage Conditions

|                             |                           |
|-----------------------------|---------------------------|
| Operating Temperature Range | -40 – 85 °C[-40 – 185 °F] |
|-----------------------------|---------------------------|

Operation/Application

|                |                 |
|----------------|-----------------|
| Indicator Type | Not Illuminated |
|----------------|-----------------|



|                     |        |
|---------------------|--------|
| Shielded            | Yes    |
| Circuit Application | Signal |

Industry Standards

|                        |          |
|------------------------|----------|
| UL Flammability Rating | UL 94V-0 |
| Performance Category   | Cat 5e   |

Packaging Features

|                    |                  |
|--------------------|------------------|
| Packaging Quantity | 80               |
| Packaging Method   | Box & Tray, Tray |

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                       |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2024 (241)<br>Candidate List Declared Against: JUNE 2024 (241)<br>Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900 ppm.                                                                                  |
| Solder Process Capability                     | Wave solder capable to 265°C                                                                                                    |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 188729-1  
8P.COVER/SOLD.STOP

TE Part # 1521003-2  
CAT 5E CABLE ASSY, 8 POS RJ45

Customers Also Bought

TE Part #2-1462037-7  
IM06TS=IM RELAY 140mW 12V

TE Part #1648203-1  
297-08-01100=SA CONN,PIN

TE Part #1648206-1  
298-08-01100=SA CONN,SKT

TE Part #1650283-1  
707-06-02109=CONTACT,PIN,#20

TE Part #1-1676481-8  
CPF 0603 27R 0.1% 25PPM 1K RL

TE Part #1650106-1  
902-84-02113=SCREW,SHOULDER,#6-32

TE Part #1-6609037-8  
3EMC3=F8146

TE Part #2-1609113-8  
3CUFS1=F8299

TE Part #1648382-1  
708-68-01109=CONTACT,SKT,#20

TE Part #530733-9  
MINI-BX ASSY PIN HDR 128 POS

Documents

Product Drawings

MJ ASSY,SG PSH W/RV PNL G TAB

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_5406217-1\_D.2d\_dxf.zip



English

Customer View Model

[ENG\\_CVM\\_CVM\\_5406217-1\\_D.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_5406217-1\\_D.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[82066 - Modular Jacks and MRJ21 Product catalog - Single Port Modular Jacks section](#)

English

Product Specifications

[Application Specification](#)

English

[Application Specification](#)

English