

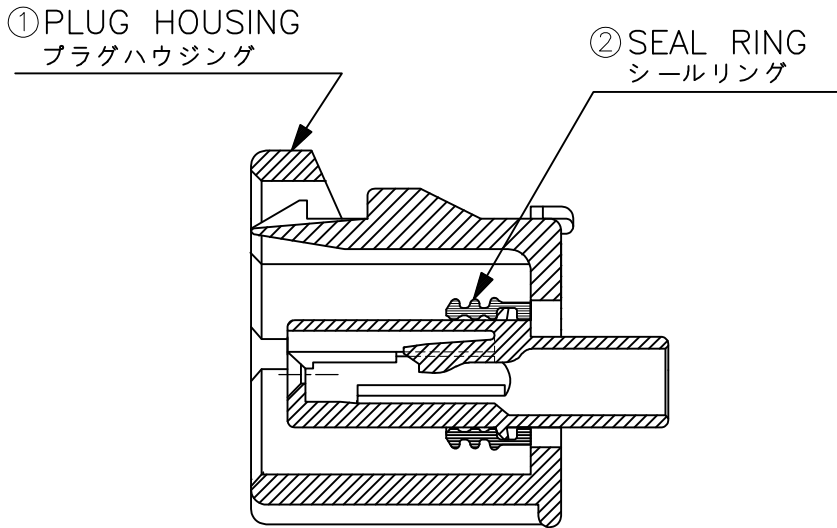
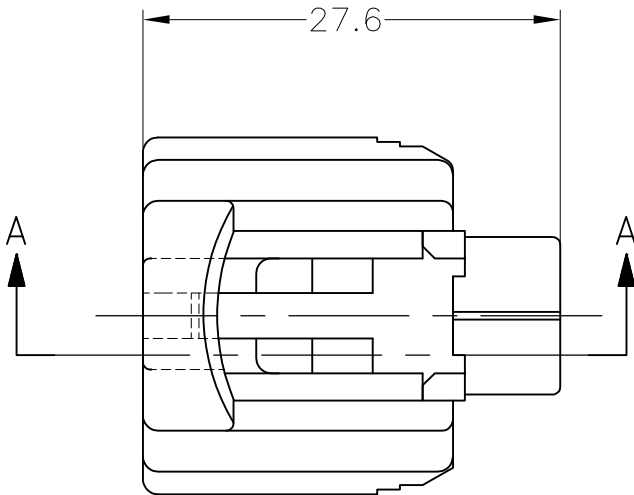


LOC J	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	RELEASED	06AUG14	DM	TK

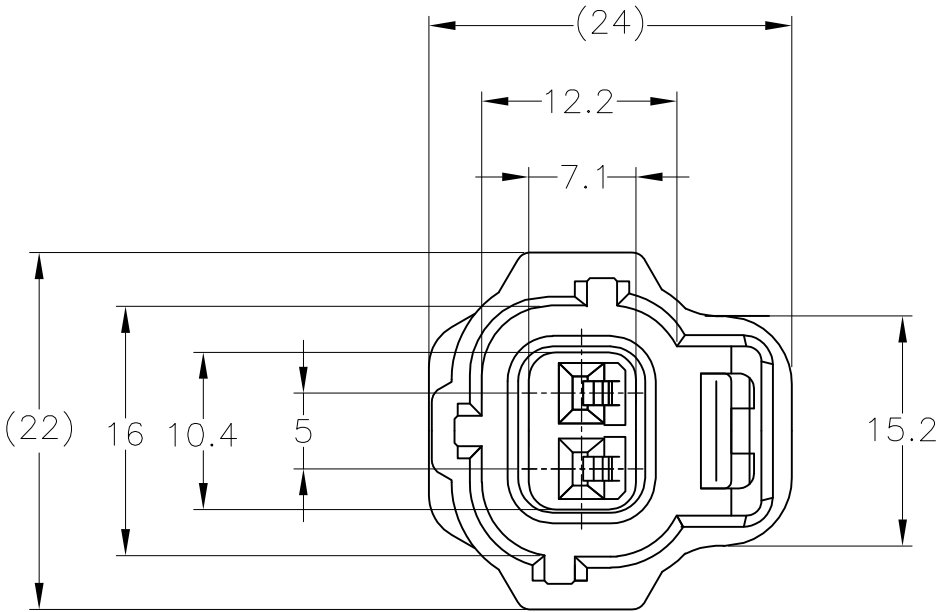

A—A

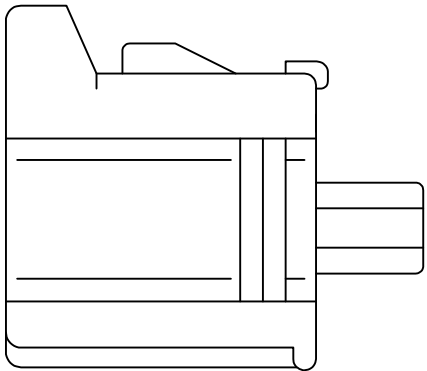

- 注；
- 1 本品はプラグハウジング単体とNBR製シールリングから構成されている。
 - 2 適用端子品番：下表による。

コンタクト型番	適用電線	被覆外径
171630	AVS 0.2～AV 0.5	φ1.4～φ2.4
171662	AVS 0.5～1.25	φ2～φ2.6

③ シールリングはフタル酸フリー品である。


- NOTE;
- 1 THIS PRODUCT CONSISTS OF A PLUG HOUSING AND A SEAL RING WHICH IS MADE OF NBR
 - 2 APPLIED CONTACT ;

CONTACT PN	WIRE RANGE	INSULATION DIA
171630	AVS 0.2～AV 0.5	φ1.4～φ2.4
171662	AVS 0.5～1.25	φ2～φ2.6

③ SEAL RING IS NON-BIS TYPE

NBR/③/BLACK	PBT/BLACK	2822361-1
② SEAL RING	① PLUG HOUSING	PART NUMBER
MATERIAL / COLOR		

TOLERANCE UNLESS OTHERWISE SPECIFIED: 一般公差	
0<×≤ 10	: ±0.2
10<×≤ 30	: ±0.25
30<×≤ 100	: ±0.3
ANGLE ; 角度	: ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.MATSUURA	06AUG2014	 TE Connectivity			
DIMENSIONS: mm		CHK S.IWATANI	06AUG2014	NAME			
		APVD T.KOHNO	06AUG2014	070 SERIES EJ-2 CONNECTOR 2 POSITION PLUG HOUSING KEY C			
		PRODUCT SPEC 108-5262					
		APPLICATION SPEC —		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		WEIGHT 5.3 g		A3	00779	C-2822361	—
MATERIAL SEE TABLE		FINISH —		CUSTOMER DRAWING			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —		SCALE 2:1		SHEET 1 of 1		REV A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2822361-1](#)