
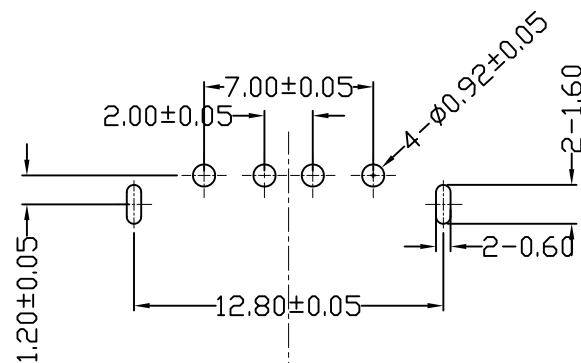
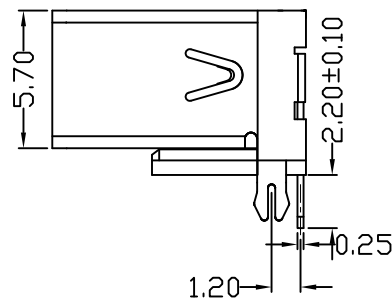


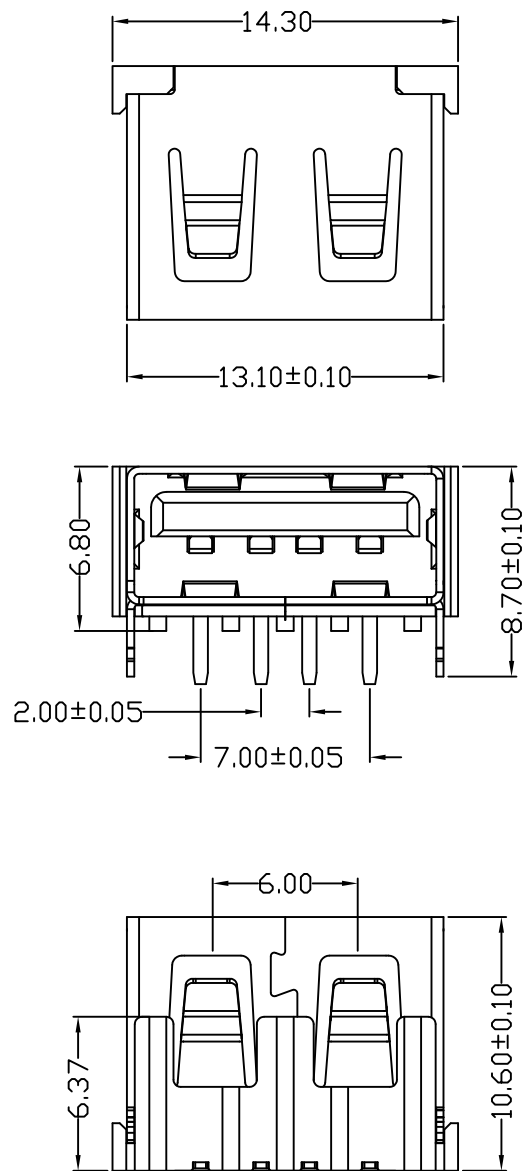

FRONT EDGE OF CONNECTOR
PCB LAYOUT (T=1.60mm)

NOTES:

1.HOUSING: SEE NOTES,
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.

SPECIFICATION:

1.ELECTRICAL CHARACTERISTIC:

CONTACT RESISTANCE: 30mΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN

2.MECHANICAL CHARACTERISTIC:

INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
5000 CYCLES MIN
5000 CYCLES EXTRACTION

FORCE: 3~35N

3.ENVIRONMENTAL:

OPERATING TEMPERATURE: -55℃+85℃

4.Contact finish:

01:Selective Gold Flash
02:Selective Gold 3U"
03:Selective Gold 5U"
04:Selective Gold 15U"
05:Selective Gold 30U"

产品图				深圳市精拓金电子有限公司					
PRODUCT CHART DWG				单位	MM	制图	尹先华	制图料号	912-221A1023D10100
公差一览表				UNITS		DRAWING		PRODUCT PART NO.	
TOLERANCE UNLESS OTHERWISE				比例	1:1	审核	郭志富	产品名称	AF10. 6D款后两脚无边方弹铁壳
X.	±0.25	X.	±5°	SCALE		CHKD		PRODUCT NO.	PBT黑胶6.8DIP
.X	±0.20	.X	±2°	日期	2012.09.24	核准	黄国荣	角法	版本
.XX	±0.05	.XX	±1°	DATE		APPD		VIEW	VER
.XXX	±0.03	.XXX	±0.5°						AD