


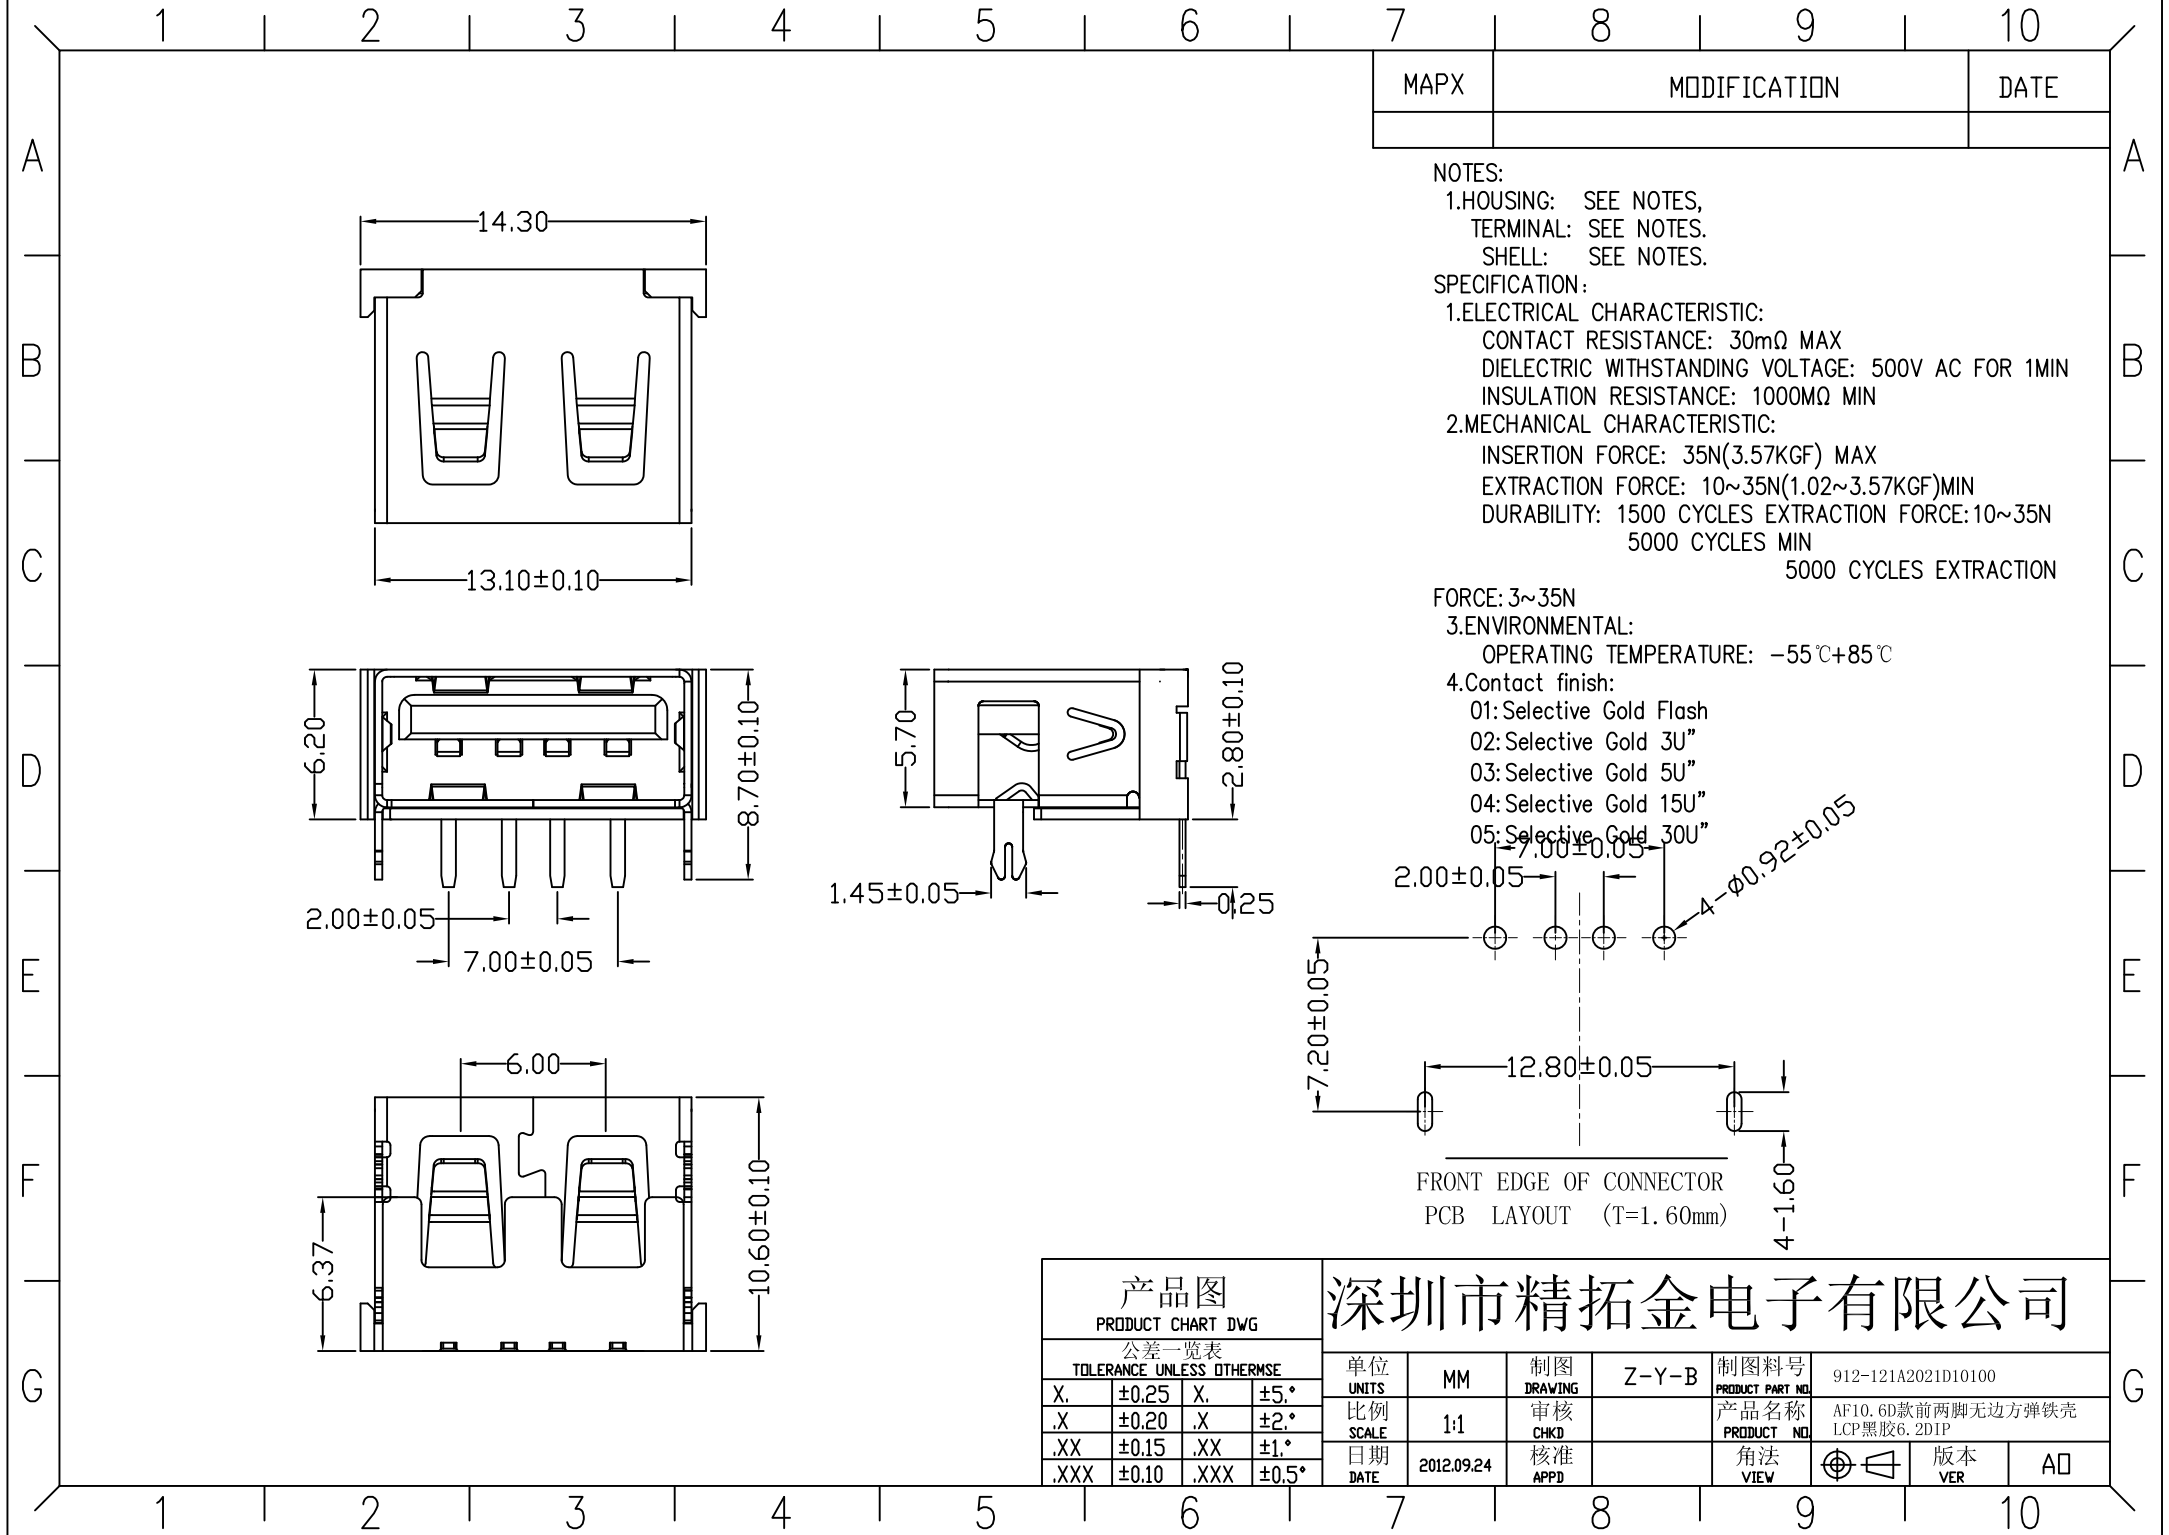

MAPX	MODIFICATION	DATE

NOTES:
1.HOUSING: SEE NOTES,
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.
SPECIFICATION:
1.ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: 30mΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN
2.MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
5000 CYCLES MIN
5000 CYCLES EXTRACTION

FORCE: 3~35N
3.ENVIRONMENTAL:
OPERATING TEMPERATURE: -55℃+85℃

4.Contact finish:
01: Selective Gold Flash
02: Selective Gold 3U"
03: Selective Gold 5U"
04: Selective Gold 15U"
05: Selective Gold 30U"

FRONT EDGE OF CONNECTOR
PCB LAYOUT (T=1.60mm)

产品图 PRODUCT CHART DWG		深圳市精拓金电子有限公司							
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	912-121A2021D10100		
X.	±0.25	X.	±5°	比例 SCALE	1:1	审核 CHKD	产品名称 PRODUCT NAME	AF10. 6D款前两脚无边方弹铁壳 LCP黑胶6. 2DIP	
.XX	±0.15	.XX	±1°	日期 DATE	2012.09.24	核准 APPD	角法 VIEW	版本 VER	AD
.XXX	±0.10	.XXX	±0.5°						