



BATTERY POWERED,  
CELLULAR GATEWAY  
FOR SENSOR  
MONITORING



# DIGI CONNECT<sup>®</sup> SENSOR

Easy-to-install and roll-out ready, battery-powered cellular gateway solution

Digi Connect Sensor is a fully integrated, battery powered cellular gateway with I/O for connecting to a wide range of external sensors. Designed to work in rugged industrial environments, Digi Connect Sensor is the ideal solution for companies looking to add remote monitoring in places where power is not easily available. Its easy installation, reliability and low data usage make remote monitoring possible in areas where it was previously cost prohibitive.

Digi Connect Sensor leverages Digi Device Cloud<sup>SM</sup> and integration services, enabling customers who need to monitor large numbers of sensors to easily integrate that data into existing applications or work with third-party applications.

Digi Connect Sensor works with Digi Connect Wizard. This smartphone application is the first of its kind for this type of battery powered gateway. It gives local installers, technicians or drivers instant feedback of sensor values over Bluetooth. With this, local personnel get immediate status on an action, like filling a tank. This technology replaces the need for outdated LCD displays.

## BENEFITS

- Weatherproof enclosure with wide temperature range makes it ideal for use in all environments
- Configurable read and report intervals with threshold and delta alarms
- Low cellular data usage that is consistent and predictable
- Multiple configurable I/O make it possible to connect to multiple sensor types
- External, configurable power outputs eliminate the need for sensor power supplies
- Penta band cellular module enables global connectivity
- Available with bundled cellular service

## RELATED PRODUCTS



Digi Connect Tank



Digi Device Cloud<sup>SM</sup>



Antennas and Accessories




Technical Services



Bundle Services

## APPLICATION EXAMPLE

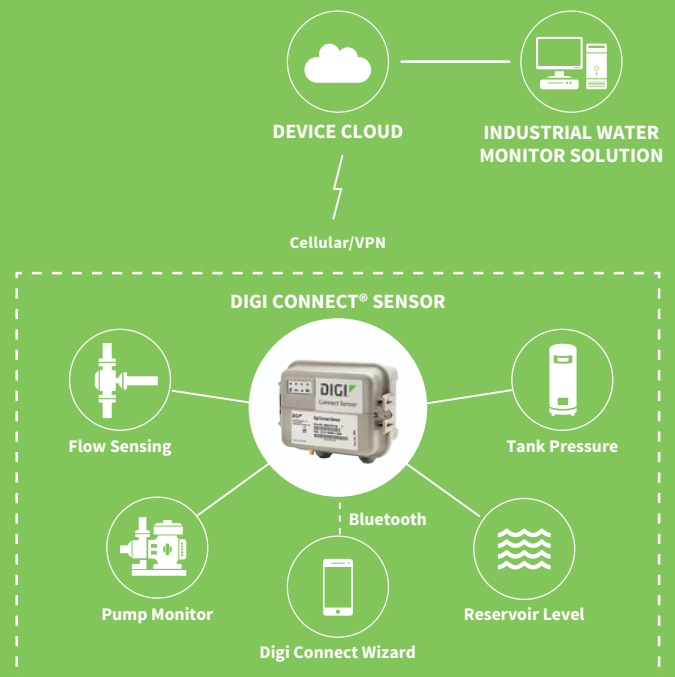

SPECIFICATIONS		Digi Connect® Sensor	
WWAN			
2G BANDS		GSM 850, GSM 900, DCS 1800, PCS 1900	
3G BANDS		FDD B1, B2, B4, B5, B8	
LTE CATEGORY 1		Verizon: Bands 2, 4, 13 AT&T, T-Mobile: Bands 2, 4, 5 with 3G/2G fallback	
ANTENNA CONNECTOR		External SMA	
SIM SLOTS		1, Standard size	
MANAGEMENT			
CONFIGURATION AND MANAGEMENT		Digi Device Cloud/Local USB to Serial CLI	
COMMUNICATION PROTOCOL		TCP	
POWER			
EXTERNAL POWER INPUT RANGE		8 VDC to 30 VDC	
BATTERY AND BATTERY LIFE		7.2 V, 14.5 Ah, Lithium thionyl chloride, non-rechargeable, replaceable; Approximately 2 years (@ 2 reads/transmits per day)	
POWER DRAW, SLEEPING		86.4 uW	
POWER DRAW, PEAK TRANSMIT		14.4 Watts	
ANALOG I/O			
INPUTS		4, Configurable as 4/20 mA or 0-10 VDC Analog inputs	
INPUT VOLTAGE RANGE		0-10.5 V (Analog input)	
INPUT CURRENT RANGE		4-22 mA (Current loop input)	
DIGITAL I/O			
PORTS		1 digital I/O or pulse counter input	
INPUT RANGE		0-0.6 VCD logic low; 2.2 V-30 VDC logic high	
MAX INPUT VOLTAGE		30 VDC	
MAX PULSE COUNT FREQUENCY		2 KHZ	
DIGITAL OUTPUT		Open collector output, max sink current 450 mA	
OUTPUT POWER			
PORTS		5	
OUTPUT VOLTAGE OPTIONS		3.3, 5, 15, 24 VDC	
MAX CURRENT OUTPUT		200 mA per sensor	
ENVIRONMENTAL			
OPERATING TEMPERATURES		-35° C to +70° C	
STORAGE TEMPERATURE		-40° C to +85° C	
RELATIVE HUMIDITY		90%	
BATTERY DISCHARGE		<1%/year if stored at +30° C	
PHYSICAL			
DIMENSIONS (L x W x H)		152.4 mm x 108.4 mm (127 mm including glands) x 74.6 mm	
WEIGHTS		264 g	
LEDS INDICATORS		Battery, cellular, sensor and Bluetooth	
ENCLOSURE MATERIAL		Lexan	
REGULATORY APPROVALS			
SAFETY		UL60950-1, CAN/CSA C22.2 No. 60950-1-01, IEC 60950-1:2005 (Second Edition); Am1:2009 + Am2:2013, EN 60950-1:2006 / A11:2009 / A1:2010 / A12:2011 / A2:2013 and EN 60950-22:2006;  Class 1, Division II, groups A,B,C,D; ANSI/ISA 12.12.01:2015,CAN/CSA C22.2 No 213-15, 1st Ed ATEX (pending) EN 60079-0:2012+A11:2013, EN 60079-15:2010, eII 3 G Ex nA nC IIC T6 Gc	
EMISSIONS		FCC part 15 Subpart B class B, EN55022: 2010/AC: 2011 class B, IEC5-003 Issue 5: 2012 class B	
IMMUNITY		EN55024:2010	
WARRANTY			
PRODUCT WARRANTY		3 years, excluding battery	

PART NUMBERS	DESCRIPTION
CSENSE-A700	Digi Connect Sensor, Global HSPA+
CSENSE-A200	Digi Connect Sensor, Verizon LTE CAT 1
CSENSE-A300	Digi Connect Sensor, AT&T/T-Mobile LTE CAT 1

**DIGI SERVICE AND SUPPORT** / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2016 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

91003268  
A6/1116

**DIGI INTERNATIONAL WORLDWIDE HQ**  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

**DIGI INTERNATIONAL FRANCE**  
+33-1-55-61-98-98 / [www.digi.fr](http://www.digi.fr)

**DIGI INTERNATIONAL JAPAN**  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

**DIGI INTERNATIONAL SINGAPORE**  
+65-6213-5380

**DIGI INTERNATIONAL CHINA**  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Digi International:](#)

[CSENSE-A700](#) [CSENSE-A300-N](#) [CSENSE-A300](#) [76000926](#)