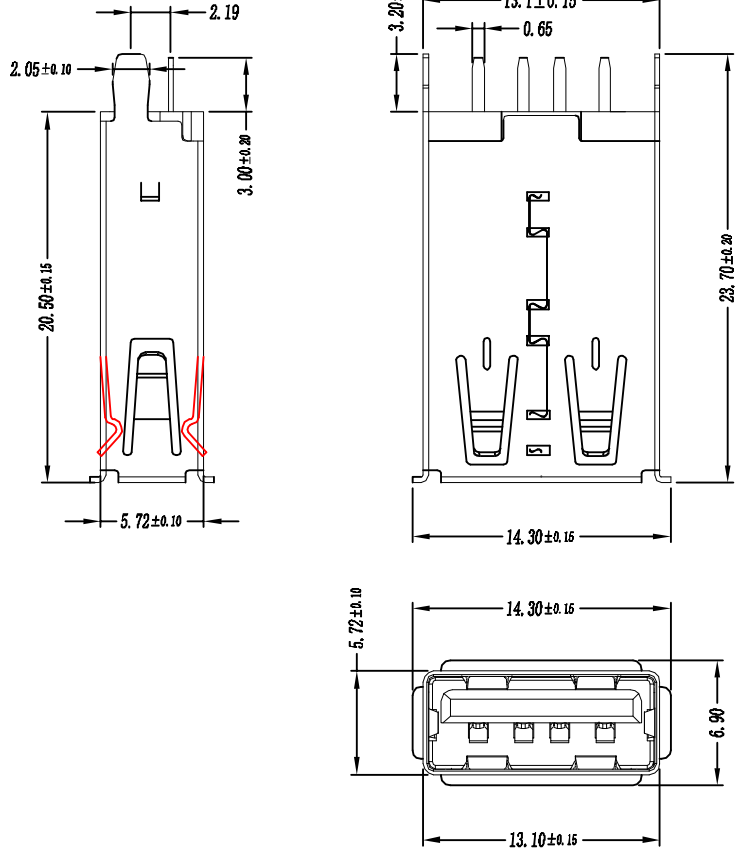


PCB LAYOUT

规格说明:Specifications:

电气特性:Electrical:

- 1.额定电流: Current Rating
1.5A/contact terminal
- 2.额定电压: Voltage Rating
30V DC
- 3.接触阻抗:Contact Resistance
30 milliohms MAX
- 4.耐电压:Dielectronic Withstanding Voitage:
500 V AC AT Sea Lev0l
- 5.绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:


- 1.插拔力: Cnnetor Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
- 2.端子保持力: Terminal Retenion
1.2kgf(MIN)

原材料:Matorial:

- 1.塑胶:Housing:
Hing Temperature Tnermaplastics,
U1 94V-0 PBT White/Black
- 2.端子:Contact:Copper Alloy C2680
- 3.外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

- 1.端子:Contact: Piated Gold in Mating Area;
Tin On Solder Talls
- 2.外壳:Shell:
Nickel Plating

 深圳市万骏达电子有限公司 http://www.wanjunda.com		图号 (DWG NO)		单位(UNIT): MM
		版本 (REV)	A/0	比例(SCALE) 1:1
		日期 (DATE)	2016.05.08	
品名 (ITEM NO)	USB AF 180 度 20.5 MM 卷边直脚	设计 (DESIGN)	邓爱平	未注公差 TOLERANCE UNSPECIFIED X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 X° ±5° X.X° ±2°
料号 (PART NO)	USB2.0-AF-ZCI-JB-20.5	审核 (CHECKED)		
模号 (MODEL NO)		核准 (APPROVED)		