

# SAC-5P-M12MS/5,0-500 FB - Sensor/actuator cable



1420992

<https://www.phoenixcontact.com/us/products/1420992>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 5-position, PVC, gray RAL 7001, Plug straight M12, coding: A, on free cable end, cable length: 5 m, with high-grade steel knurl

## Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Contamination can be detected quickly – thanks to the light color

## Commercial data

|                                      |                                |
|--------------------------------------|--------------------------------|
| Item number                          | 1420992                        |
| Packing unit                         | 1 pc                           |
| Minimum order quantity               | 1 pc                           |
| Note                                 | Made to order (non-returnable) |
| Sales key                            | BF03                           |
| Product key                          | BF1CDA                         |
| GTIN                                 | 4055626250229                  |
| Weight per piece (including packing) | 224.89 g                       |
| Weight per piece (excluding packing) | 215.85 g                       |
| Customs tariff number                | 85444290                       |
| Country of origin                    | PL                             |

# SAC-5P-M12MS/5,0-500 FB - Sensor/actuator cable



1420992

<https://www.phoenixcontact.com/us/products/1420992>

## Technical data

### Product properties

|                      |                          |
|----------------------|--------------------------|
| Product type         | Sensor/actuator cable    |
| Application          | Food processing industry |
| Number of positions  | 5                        |
| No. of cable outlets | 1                        |
| Shielded             | no                       |
| Coding               | A                        |

### Insulation characteristics

|                      |    |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution  | 3  |

### Material specifications

|                               |                 |
|-------------------------------|-----------------|
| Material of grip body         | PP              |
| Contact material              | CuSn            |
| Contact surface material      | Ni/Au           |
| Contact carrier material      | PP              |
| Material for screw connection | Stainless steel |

### Electrical properties

|                       |                            |
|-----------------------|----------------------------|
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage $U_N$ | 48 V AC                    |
|                       | 60 V DC                    |
| Nominal current $I_N$ | 4 A                        |

### Mechanical properties

#### Mechanical data

|                             |            |
|-----------------------------|------------|
| Insertion/withdrawal cycles | $\geq 100$ |
|-----------------------------|------------|

### Signaling

|                        |    |
|------------------------|----|
| Status display         | no |
| Status display present | No |

### Connector

#### Connection 1

|                     |                   |
|---------------------|-------------------|
| Type                | Plug straight M12 |
| Number of positions | 5                 |
| Coding type         | A                 |

#### Connection 2

|      |                |
|------|----------------|
| Type | free cable end |
|------|----------------|


# SAC-5P-M12MS/5,0-500 FB - Sensor/actuator cable



1420992

<https://www.phoenixcontact.com/us/products/1420992>

## Cable/line

|                                               |                                                                                                 |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------|
| Cable length                                  | 5 m                                                                                             |
| PVC gray [500]                                |                                                                                                 |
| Dimensional drawing                           |               |
| Cable weight                                  | 51 kg/km                                                                                        |
| UL AWM Style                                  | 2464 / 1729 (80°C/300 V)                                                                        |
| Number of positions                           | 5                                                                                               |
| Shielded                                      | no                                                                                              |
| Cable type                                    | PVC gray [500]                                                                                  |
| Conductor structure signal line               | 19x 0.15 mm                                                                                     |
| AWG signal line                               | 22                                                                                              |
| Conductor cross section                       | 5x 0.34 mm <sup>2</sup> (Signal line)                                                           |
| Wire diameter incl. insulation                | 1.26 mm ±0.05 mm                                                                                |
| External cable diameter                       | 5.00 mm ±0.15 mm                                                                                |
| Outer sheath, material                        | PVC                                                                                             |
| External sheath, color                        | gray RAL 7001                                                                                   |
| Conductor material                            | Bare Cu litz wires                                                                              |
| Material wire insulation                      | PVC                                                                                             |
| Single wire, color                            | brown, white, blue, black, green-yellow                                                         |
| Thickness, insulation                         | ≥ 0.23 mm (Core insulation)                                                                     |
| Thickness, outer sheath                       | ≥ 0.76 mm                                                                                       |
| Overall twist                                 | 5 wires around filler to the core                                                               |
| Max. conductor resistance                     | max. 57 Ω/km (at 20 °C)                                                                         |
| Insulation resistance                         | ≥ 200 MΩ*km (at 20 °C)                                                                          |
| Nominal voltage, cable                        | ≤ 300 V                                                                                         |
| Test voltage                                  | ≥ 3000 V                                                                                        |
| Minimum bending radius, fixed installation    | 5 x D                                                                                           |
| Minimum bending radius, flexible installation | 10 x D                                                                                          |
| Smallest bending radius, fixed installation   | 25 mm                                                                                           |
| Smallest bending radius, movable installation | 50 mm                                                                                           |
| Flame resistance                              | As per UL-Style 2464                                                                            |
| Ambient temperature (operation)               | -40 °C ... 80 °C (cable, fixed installation)<br>-25 °C ... 80 °C (Cable, flexible installation) |

## Environmental and real-life conditions

1420992

<https://www.phoenixcontact.com/us/products/1420992>

Ambient conditions

|                                 |                                  |
|---------------------------------|----------------------------------|
| Degree of protection            | IP65                             |
|                                 | IP67                             |
|                                 | IP68                             |
|                                 | IP69K                            |
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |

Standards and regulations

M12

|                          |                 |
|--------------------------|-----------------|
| Standard designation     | M12 connector   |
| Standards/specifications | IEC 61076-2-101 |

# SAC-5P-M12MS/5,0-500 FB - Sensor/actuator cable




1420992

<https://www.phoenixcontact.com/us/products/1420992>

## Drawings

Dimensional drawing

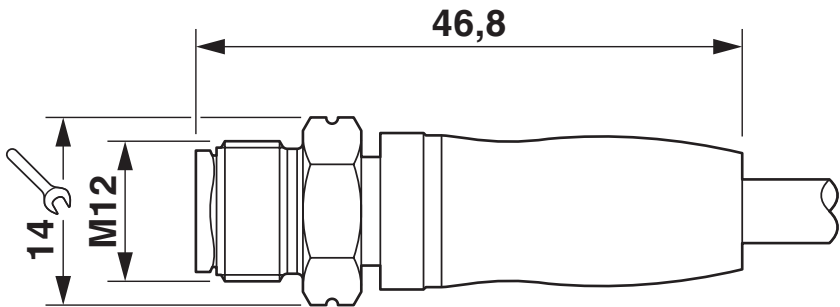

Plug, M12 x 1, straight

Circuit diagram



1420992

<https://www.phoenixcontact.com/us/products/1420992>

Schematic diagram



Pin assignment M12 male connector, 5-pos., A-coded, male side

# SAC-5P-M12MS/5,0-500 FB - Sensor/actuator cable



1420992

<https://www.phoenixcontact.com/us/products/1420992>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27060311 |
| ECLASS-12.0 | 27060311 |
| ECLASS-13.0 | 27060311 |

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC001855 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

Environmental product compliance

|                                         |                                                                                                                                                |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS                                 |                                                                                                                                                |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                                                                                                                             |
| China RoHS                              |                                                                                                                                                |
| Environment friendly use period (EFUP)  | EFUP-E                                                                                                                                         |
|                                         | No hazardous substances above the limits                                                                                                       |
| EU REACH SVHC                           |                                                                                                                                                |
| REACH candidate substance (CAS No.)     | 1,6,7,8,9,14,15,16,17,17,18,18-Dodecachloropentacyclo[12.2.1.16,9.02,13.05,10]octadeca-7,15-diene ("Dechlorane Plus" <sup>TM</sup> )(CAS: n/a) |
| SCIP                                    | 0a55dd22-5e95-4577-be75-01dc967fe236                                                                                                           |

# SAC-5P-M12MS/5,0-500 FB - Sensor/actuator cable



1420992

<https://www.phoenixcontact.com/us/products/1420992>

## Accessories

### CUTFOX-S VDE - Diagonal cutter

1212207

<https://www.phoenixcontact.com/us/products/1212207>



Diagonal cutter for hard (piano wire) and soft wires, VDE 1000 V AC/1500 V DC tested

---

### WIREFOX SAC - Stripping tool

1212623

<https://www.phoenixcontact.com/us/products/1212623>



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from Ø of 4.4 to 7 mm, any stripping length

# SAC-5P-M12MS/5,0-500 FB - Sensor/actuator cable



1420992

<https://www.phoenixcontact.com/us/products/1420992>

## WIREFOX 10 - Stripping tool

1212150

<https://www.phoenixcontact.com/us/products/1212150>



Stripping tool, for cables and conductors from 0.02 - 10 mm<sup>2</sup>, self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm<sup>2</sup> stranded/1.5 mm<sup>2</sup> solid, replaceable stripping blade

---

## TSD 04 SAC - Torque screwdriver

1208429

<https://www.phoenixcontact.com/us/products/1208429>



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

# SAC-5P-M12MS/5,0-500 FB - Sensor/actuator cable



1420992

<https://www.phoenixcontact.com/us/products/1420992>

## TSD-M 1,2NM - Torque screwdriver

1212224

<https://www.phoenixcontact.com/us/products/1212224>



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

---

## TSD-M SAC-BIT ADAPTER - Adapter insert

1212600

<https://www.phoenixcontact.com/us/products/1212600>



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

# SAC-5P-M12MS/5,0-500 FB - Sensor/actuator cable



1420992

<https://www.phoenixcontact.com/us/products/1420992>

## SAC BIT M12-W14 - Tool

1212513

<https://www.phoenixcontact.com/us/products/1212513>



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, with a hexagonal knurl wrench size of 14 mm, with 4 mm hexagonal drive

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)