

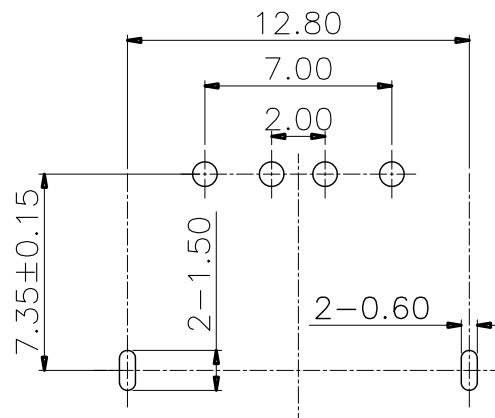


单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	909-162A1015D10200		
比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	AF10.0B款前两脚无边铜壳PBT白胶7.8ID无耳朵		
日期 DATE	2015.02.04	核准 APPD		角法 VIEW		版本 VER	AO

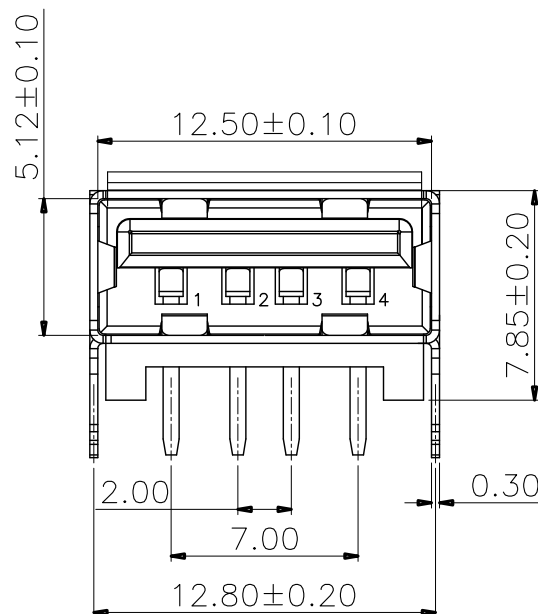

PCB HOLES(THE PATTERN SIDE) t=1.6mm
NOTE:GENERAL TOLERANCE:±0.1mm

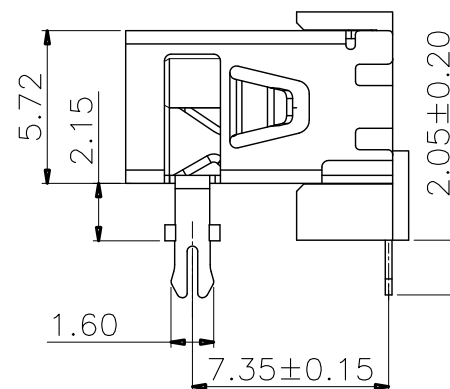

1. HOUSING: SEE NOTES,
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.

1. ELECTRICAL CHARACTERISTIC:

CONTACT RESISTANCE: 30MΩ MAX

DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN

INSULATION RESISTANCE: 1000MΩ MIN

2. MECHANICAL CHARACTERISTIC:

INSERTION FORCE: 35N(3.57KGF) MAX

EXTRACTION FORCE: 10~35N(1.02~3.57KGF) MIN

DURABILITY: 1500 CYCLES EXTRACTION FORCE: $10 \sim 35$ N

5000 CYCLES MIN

5000 CYCLES EXTRACTION FORCE:3~35N

3. ENVIRONMENTAL:

OPERATING TEMPERATURE: $-55^{\circ}\text{C}+85^{\circ}\text{C}$

4. Contact finish:

01:Selective Gold Flash

02:Selective Gold 3U"

03:Selective Gold 5U"

04:Selective Gold 15U"

05:Selective Gold 30U"