

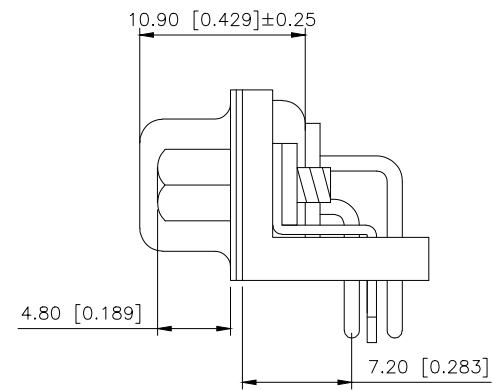
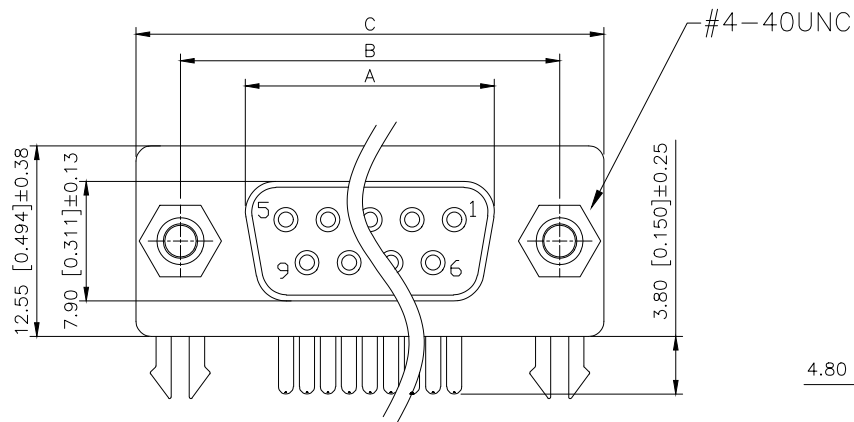


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		新增尺寸, 图面升级整理图面	2025.04.24	阿树

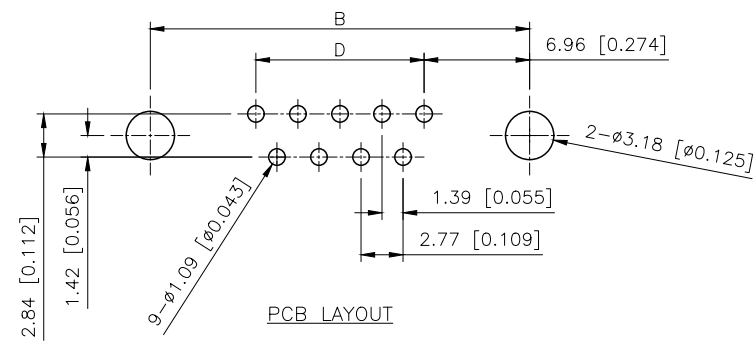

Specifications:
规格:
Current rating:5A AC/DC
额定电流: 5A AC/DC
Voltage rating:250V AC
额定电压: 250V AC
Withstanding voltage:500V AC/MIN
耐受电压: ≥500V AC/分钟
Temperature range:-55℃-+105℃
温度范围: -55℃-+105℃
Insulation resistance:1000MΩMIN
绝缘电阻: ≥1000MΩ
Contact resistance:30mΩMAN
接触电阻:≤30mΩ
Material And FINISHED:
材料和成本:
INSULATOR:PBT UL 94V-0
绝缘体: PBT UL 94V-0
SHELL: SPCC-SD Plated Ni / Au / Sn
外壳: 铁合金 镀镍/金/锡

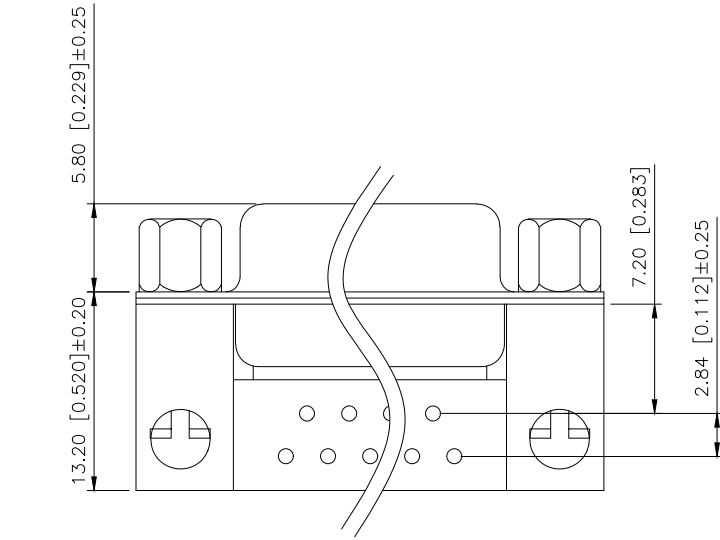

PART NO.:

X03 XX F C X X X
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
- ②Row No-Pin No: XX-09;15;25;37
- ③Welding Board Angle:F-Female
- ④C: Car-pin
- ⑤Planting Category:
1:1u 2:2u 3:3u 4:5u 5:15u 6:30u 7:AuSn
- ⑥Color: B:Black W:White BL:Blue
Y:Yellow G:Green R:Red
- ⑦1:TYPE-1; 2:TYPE-2

铆合方式	TYPE-1: 铆合	TYPE-2: 铆合锁螺丝
图式		

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	D-SUB		
CHECKED		UNIT:	mm/in	PART NO.:	X03XXFCXXX		
APPROVED		SIZE:	A4	DWG NO.:			
CISION CO.,LIMITED				SCALE	PAGE	REVISION	
				N/A	1/1	A1	