


PCB terminal block - MKKDS 3/15 BD:54-24 - 1714567


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



PCB terminal block, nominal current: 22 A, pitch: 5 mm, number of positions: 15, connection method: Screw connection with tension sleeve, mounting: Wave soldering, color: green. The article can be aligned to create different nos. of positions!

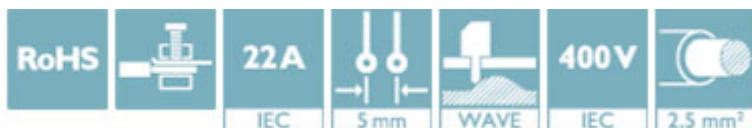

Key Commercial Data

Packing unit	50 pc
GTIN	
GTIN	4055626368542

Technical data

Dimensions

Pitch	5 mm
Dimension a	5 mm
Height	32 mm
Solder pin [P]	5 mm
Hole diameter	1.3 mm

General

Range of articles	MKKDS 3
Insulating material group	I
Rated voltage (III/2)	400 V
Nominal current I_N	22 A
Nominal cross section	2.5 mm²
Flammability rating according to UL 94	V0
Number of positions	15
Screw thread	M3

Standards and Regulations

Flammability rating according to UL 94	V0
----------------------------------------	----

PCB terminal block - MKKDS 3/15 BD:54-24 - 1714567

Technical data

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phoenix Contact:

1714567