

# Actuator

45-  
2C35.1920.110



<https://eao.com/p/45-2C35.1920.110>

Your product:

---



## 45-2C35.1920.110 Actuator

### FRONT

Front form:	round
Front dimension:	Ø 40 mm
Front bezel colour:	Black
Front bezel material:	Plastic

### MOUNTING

Mounting type:	Panel mounting
----------------	----------------

### OPERATING-/INDICATION PART

Lens illumination:	non illuminative
Lens colour:	Red
Lens shape:	mushroom-head
Lens material:	Plastic
Lens optics:	opaque

### MECHANICAL CHARACTERISTIC

Weight:	0.075 kg
Switching action:	Maintained
Release type:	Key release to unlock
Mechanical lifetime:	300 000 cycles of operation
Operating frequency:	Max. 600/h

## AMBIENT CONDITION

<b>Shock resistance:</b>	According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms
<b>Vibration resistance:</b>	According to IEC 60068-2-6: 2 ... 500 Hz: 5 g
<b>Climate resistance:</b>	During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6
<b>Operating temperature:</b>	– 25 °C ... + 70 °C
<b>Storage temperature:</b>	– 40 °C ... + 80 °C



## CERTIFICATE

<b>RoHS:</b>	RoHS compliant
<b>REACH:</b>	REACH compliant


## OTHER

<b>Hints:</b>	Application as per DIN EN ISO 13850 and EN 60204-1
<b>Dimension:</b>	Ø 40 mm
<b>Housing colour:</b>	Yellow
<b>Housing material:</b>	Plastic
<b>Short Description:</b>	Actuator, Ø 40 mm, mushroom-head, non illuminative, Red, Plastic, opaque, round, Black, Plastic, Maintained, Key release to unlock

### Dimension drawings:

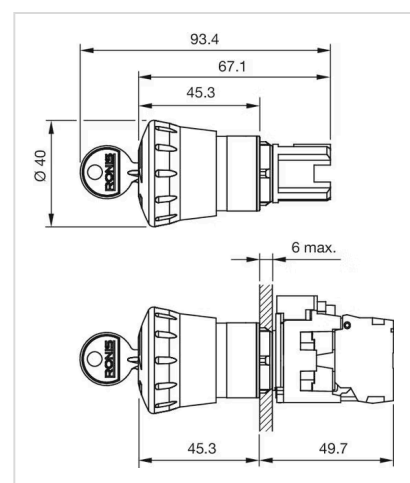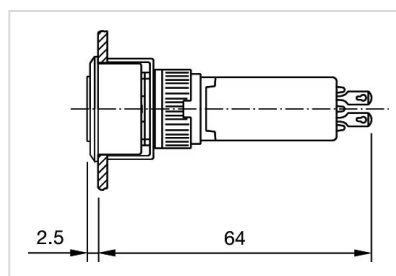

### Mounting cut-outs:

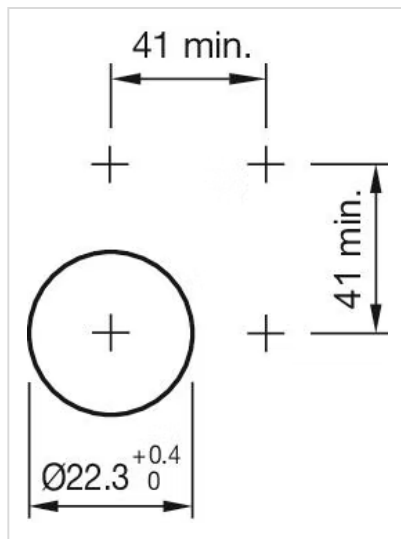

Wiring diagrams:

