
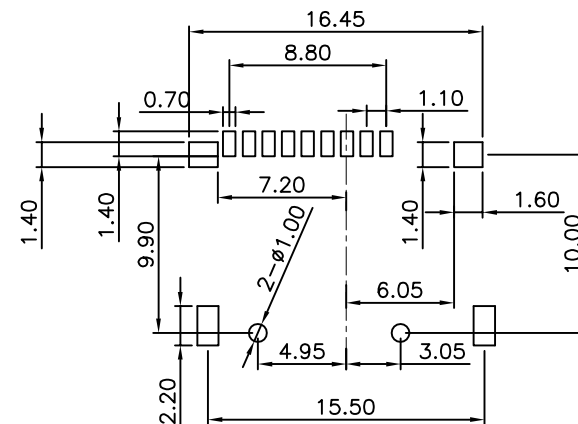
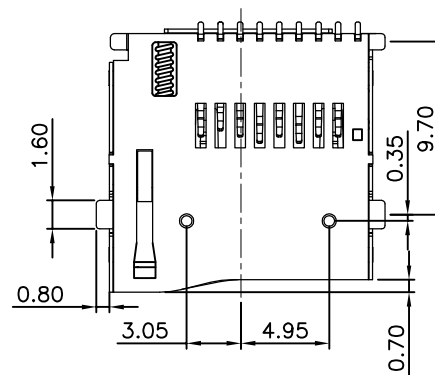
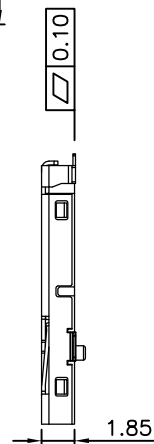
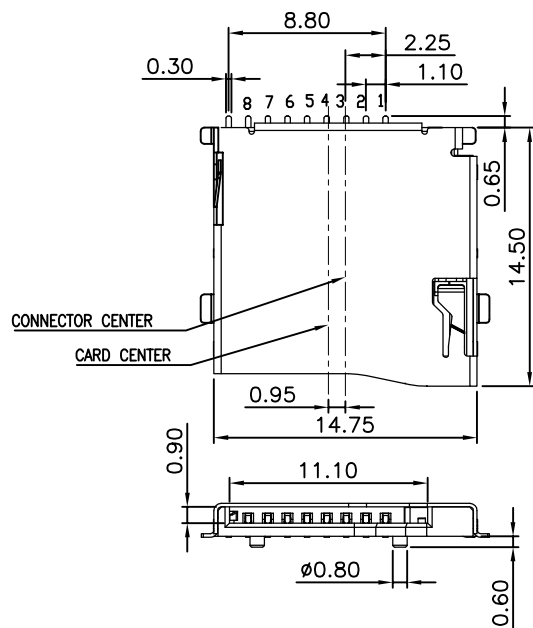


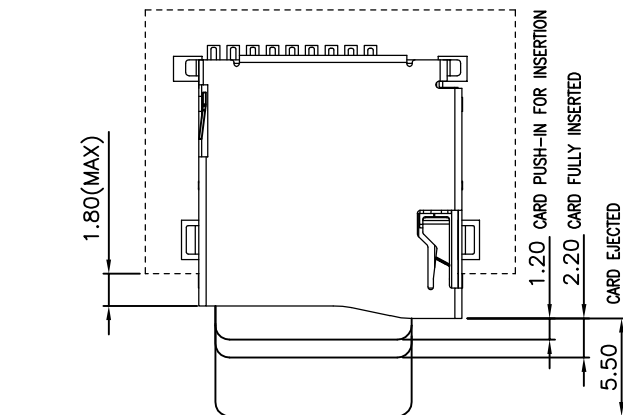

PCB LAYOUT TOP VIEW
(TOLERANCE:±0.05)

Specification

*Electrical Characteristics:

Contact Current Rating:0.5 Amperes.
Dielectric Withstanding Voltage:AC500V r.m.s.
Insulation Resistance:1000 MΩ Minimum.
Contact Resistance:100 mΩ Maximum.

*Environmental:

Operating Temperature:-25°C~+85°C.

*Environmental:

Mating Cycles:5,000 Insertions.

*Mechanical Characteristics:

Card Push Insertion/Out Force:0.7~1.20kgf.

*Material:

Insulator:HI-Temp Plastic UL 94V-0 Rated.
Contact:Copper Alloy(t=0.15mm).
Shell:Stainless Steel(t=0.15mm).
Spring:SWP.

Pin No.	Pin assignent	Pin No.	Pin assignent	CARD DETECTION SWITCH	
1	DAT2	5	CLK	WHEN CARD IS EJECTED	WHEN CARD IS INSERTED
2	CD/DAT3	6	VSS	OPEN	CLOSE
3	CMD	7	DAT0		
4	VDD	8	DAT1		



深圳市万骏达电子有限公司

<http://www.wanjunda.com>

品名 (ITEM NO)

TF PUSH外焊

料号 (PART NO)

TF-PUSH-1.8H-01

模号 (MODEL NO)


图号 (DWG NO)

单位 (UNIT): MM

本 (REV)

比例 (SCALE) 1:1

日期 (DATE)



设计 (DESIGN)

未注公差
TOLERANCE UNSPECIFIED

审核 (CHECKED)

X.X ±0.30
X.XX ±0.15
X.XXX ±0.10
X° ±5°
X.X° ±2°

核准 (APPROVED)