
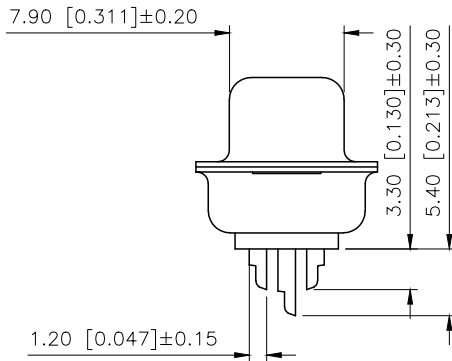
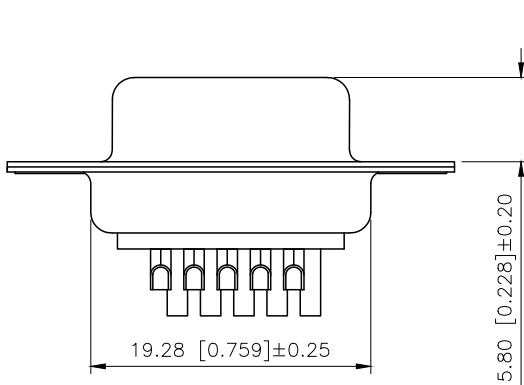


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		独立各PIN数图纸, 增加开孔定位尺寸	2024.12.7	阿树

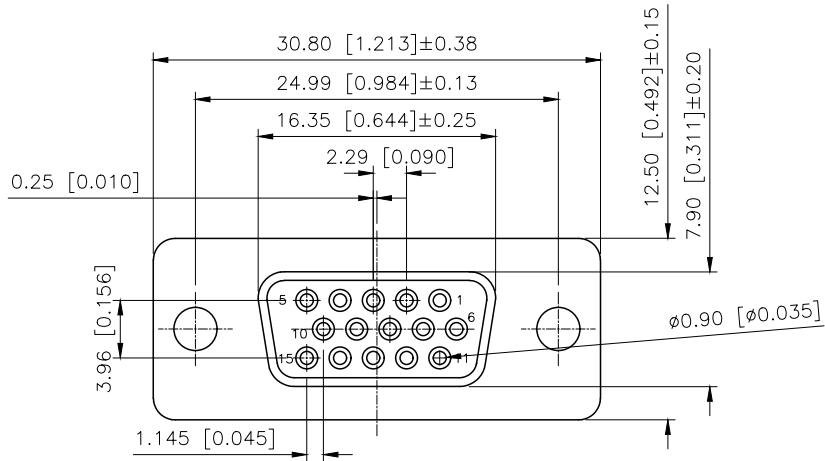

Specifications:

规格:

- Voltage rating:250VAC/DC
额定电压: 250V AC/DC
- Current rating:3A AC/DC
额定电流: 3A AC/DC
- Withstanding voltage:500V AC/minute
耐受电压: 500V AC/分钟
- Temperature range: -55℃-+105℃
温度范围: -55℃-+105℃
- Insulation resistance:1000MΩ MIN
绝缘电阻: 1000MΩ MIN
- Contact resistance:30mΩ Max
接触电阻: 30mΩ Max

Material:

材料:

- Rubber core:PBT UL94V-0
胶芯: PBT UL94V-0
- The iron shell:SPCC-SD Nivkel Plating/Tin Plating/Gold Plating
铁壳: SPCC-SD,镀镍/镀锡/镀金
- Terminal:Copper alloy
端子: 铜合金

PART NO.:

X04 15 F X X X X
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
②Pin No.:15PIN
③Welding Board Angle :F-Female
④T:Tradutional C: Car-pin
⑤Planting Categoty:
1:1U 2:2U 3:3U 4:5U 5:15U 6:30U 7:AUStn
⑥Color:B-BLACK W-White BL-Blue
⑦1:TYPE-1; 2:TYPE-2; 3:TYPE-3; 4:TYPE-4

铆合方式	TYPE-1:铆合	TYPE-2:前铆实心螺母	TYPE-3:后铆空心螺母	TYPE-4:后铆空心螺母锁螺丝
图示				

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: D-SUB
CHECKED		UNIT: mm/in	PART NO.: X0415FXXXX
APPROVED		SIZE: A4	DWG NO.:

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		独立各PIN数图纸, 增加开孔定位尺寸	2024.12.7	阿树



Specifications:

规格:

- Voltage rating:250VAC/DC
额定电压: 250V AC/DC
- Current rating:3A AC/DC
额定电流: 3A AC/DC
- Withstanding voltage:500V AC/minute
耐受电压: 500V AC/分钟
- Temperature range: -55℃-+105℃
温度范围: -55℃-+105℃
- Insulation resistance:1000MΩ MIN
绝缘电阻: 1000MΩ MIN
- Contact resistance:30mΩ Max
接触电阻: 30mΩ Max

Material:

- 材料:
- Rubber core:PBT UL94V-0
胶芯: PBT UL94V-0
 - The iron shell:SPCC-SD Nivkel Plating/Tin Plating/Gold Plating
铁壳: SPCC-SD,镀镍/镀锡/镀金
 - Terminal:Copper alloy
端子: 铜合金

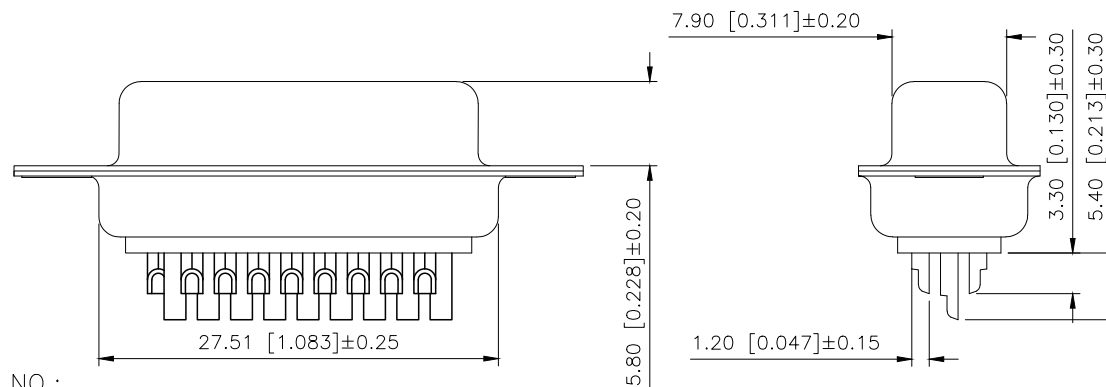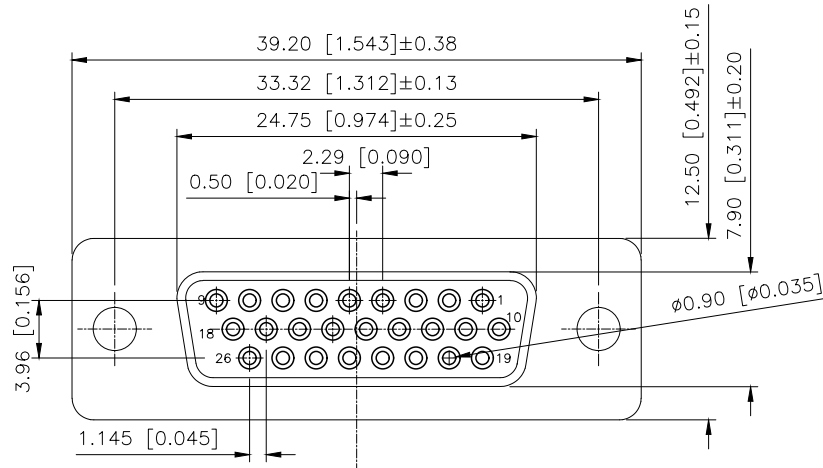

PART NO.:

X04 26 F X X X X
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
②Pin No.:26PIN
③Welding Board Angle :F-Female
④T:Tradutional C: Car-pin
⑤Planting Categoty:
1:1U 2:2U 3:3U 4:5U 5:15U 6:30U 7: AuSn
⑥Color:B-BLACK W-White BL-Blue
⑦1:TYPE-1; 2:TYPE-2; 3:TYPE-3; 4:TYPE-4


铆合方式	TYPE-1: 铆合	TYPE-2: 前铆实心螺母	TYPE-3: 后铆空心螺母	TYPE-4: 后铆空心螺母锁螺丝
图示				

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: D-SUB
CHECKED		UNIT: mm/in	PART NO.: X0426FXXXX
APPROVED		SIZE: A4	DWG NO.:

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		独立各PIN数图纸, 增加开孔定位尺寸	2024.12.7	阿树

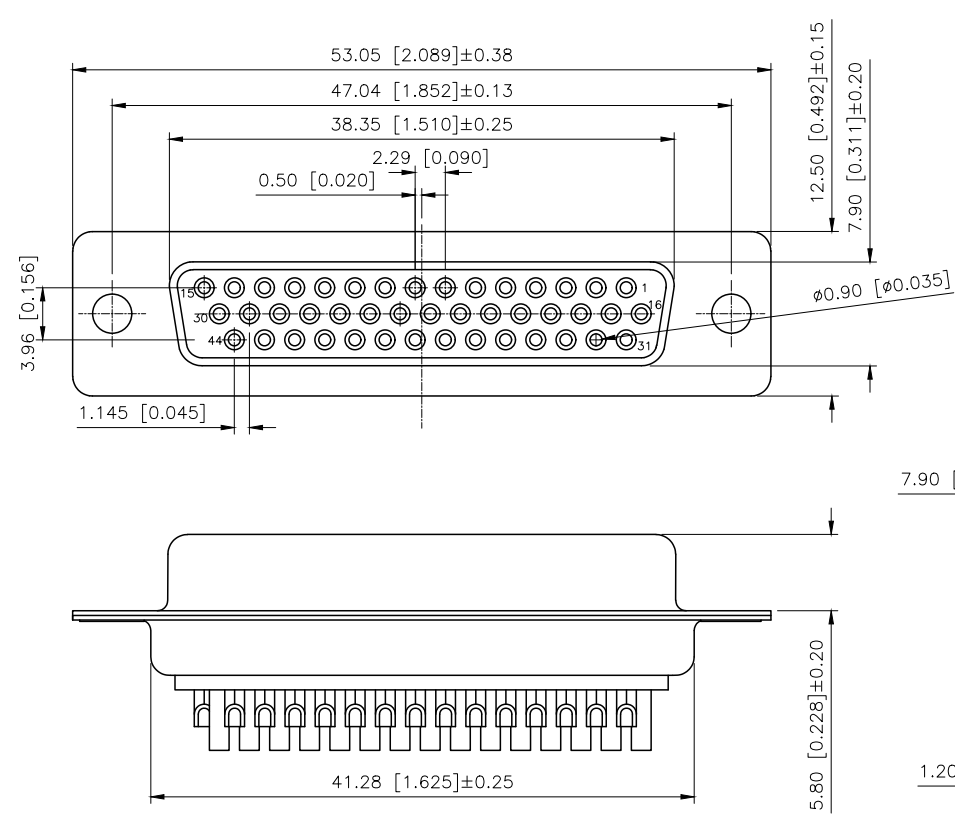

Specifications:
规格:
1.Voltage rating:250VAC/DC
额定电压: 250V AC/DC
2.Current rating:3A AC/DC
额定电流: 3A AC/DC
3.Withstanding voltage:500V AC/minute
耐受电压: 500V AC/分钟
4.Temperature range: -55℃-+105℃
温度范围: -55℃-+105℃
5.Insulation resistance:1000MΩ MIN
绝缘电阻: 1000MΩ MIN
6.Contact resistance:30mΩ Max
接触电阻: 30mΩ Max
Material:
材料:
7.Rubber core:PBT UL94V-0
胶芯: PBT UL94V-0
8.The iron shell:SPCC-SD Nivkel Plating;
Tin Plating/Gold Plating
铁壳: SPCC-SD,镀镍/镀锡/镀金
9.Terminal:Copper alloy
端子: 铜合金

PART NO.:

X04 44 F X X X X
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
- ②Pin No.:44PIN
- ③Welding Board Angle :F-Female
- ④T:Tradutlional C: Car-pin
- ⑤Planting Catogtry:
1:1U 2:2U 3:3U 4:5U 5:15U 6:30U 7:AuSn
- ⑥Color:B-BLACK W-White BL-Blue
- ⑦1:TYPE-1; 2:TYPE-2; 3:TYPE-3; 4:TYPE-4


铆合方式	TYPE-1:铆合	TYPE-2:前铆实心螺母	TYPE-3:后铆空心螺母	TYPE-4:后铆空心螺母锁螺丝
图示				

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:	MODEL TYPE: D-SUB
CHECKED		UNIT: mm/in	PART NO.: X0444FXxxx
APPROVED		SIZE: A4	DWG NO.:

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		独立各PIN数图纸, 增加开孔定位尺寸	2024.12.7	阿树

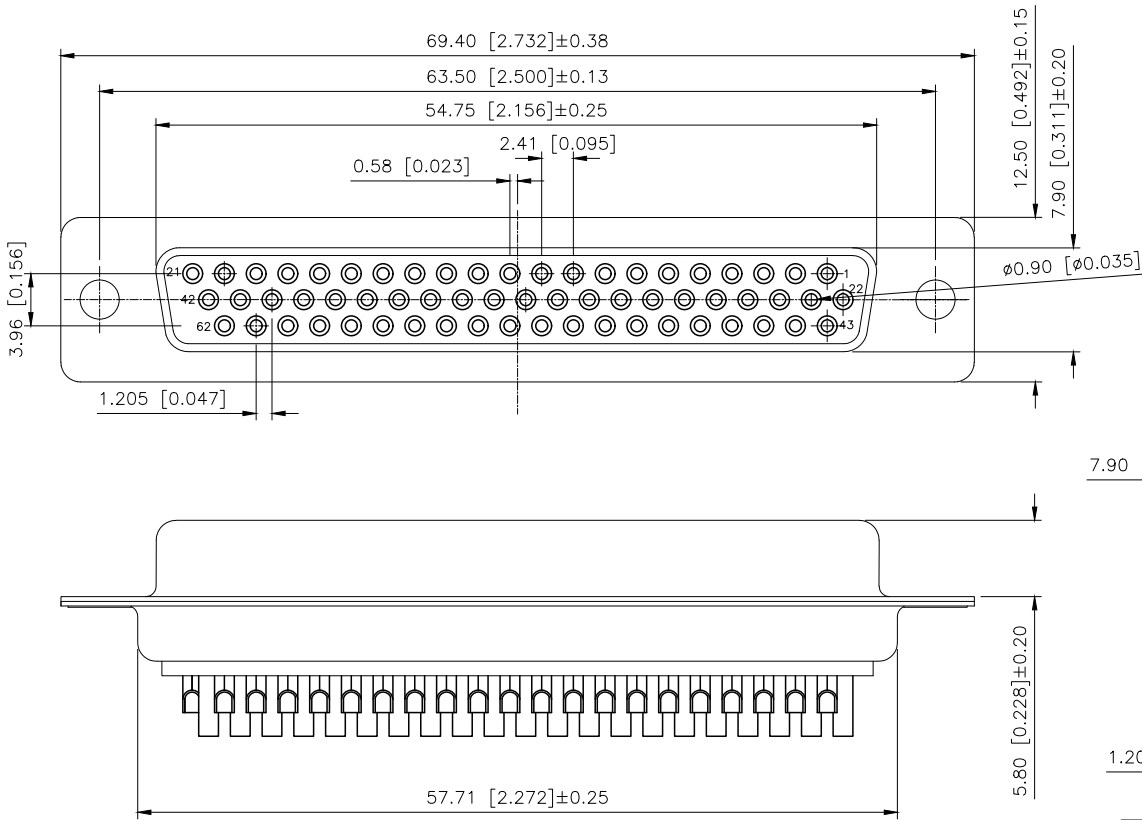

Specifications:

规格:

- Voltage rating: 250VAC/DC
额定电压: 250V AC/DC
 - Current rating: 3A AC/DC
额定电流: 3A AC/DC
 - Withstanding voltage: 500V AC/minute
耐受电压: 500V AC/分钟
 - Temperature range: -55°C - +105°C
温度范围: -55°C - +105°C
 - Insulation resistance: 1000MΩ MIN
绝缘电阻: 1000MΩ MIN
 - Contact resistance: 30mΩ Max
接触电阻: 30mΩ Max
- Material:
- 材料:
- Rubber core: PBT UL94V-0
胶芯: PBT UL94V-0
 - The iron shell: SPCC-SD Nivkel Plating;
Tin Plating/Gold Plating
铁壳: SPCC-SD, 镀镍/镀锡/镀金
 - Terminal: Copper alloy
端子: 铜合金

PART NO.:

X04 62 F X X X X
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No
② Pin No.: 62PIN
③ Welding Board Angle : F-Female
④ T: Tradutional C: Car-pin
⑤ Planting Catogtry:
1: 1U 2: 2U 3: 3U 4: 5U 5: 15U 6: 30U 7: AuSn
⑥ Color: B-BLACK W-White BL-Blue
⑦ 1: TYPE-1; 2: TYPE-2; 3: TYPE-3; 4: TYPE-4

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: D-SUB
CHECKED		UNIT: mm/in	PART NO.: X0462FXxxx
APPROVED		SIZE: A4	DWG NO.: