

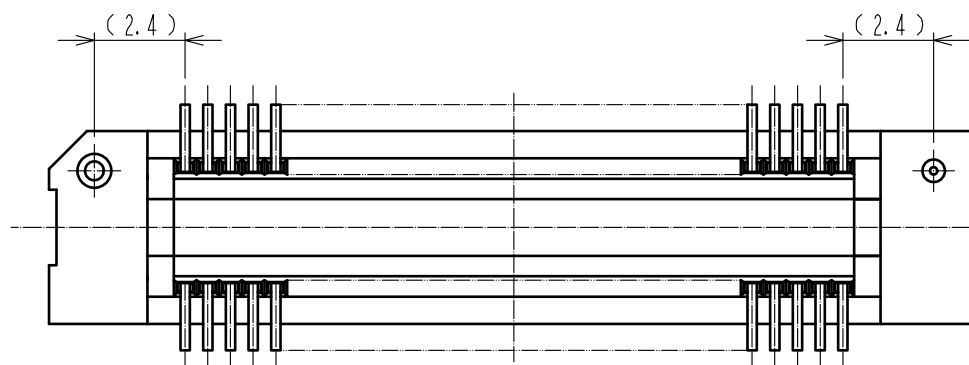
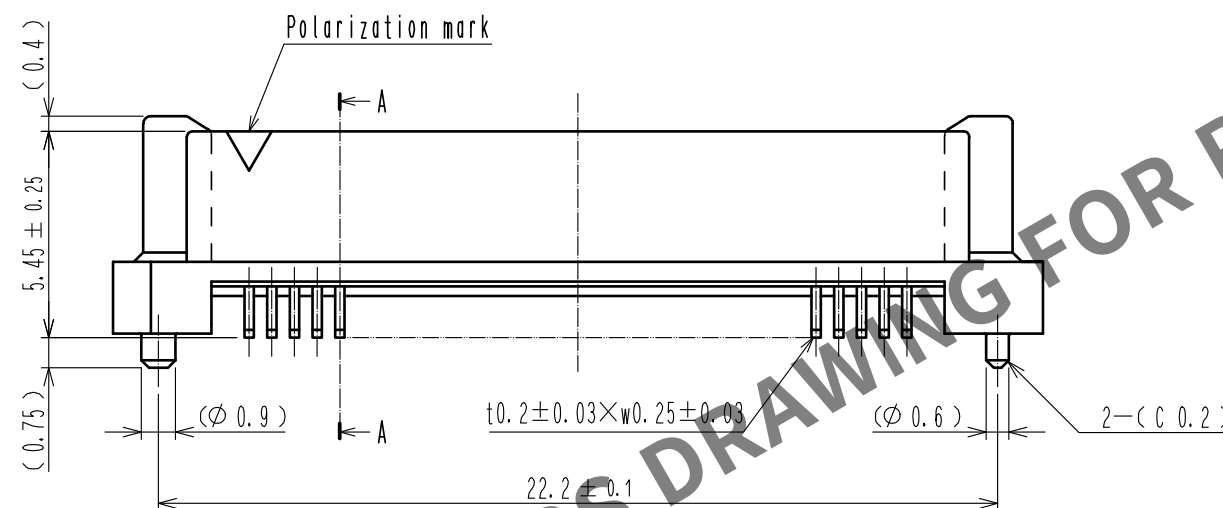
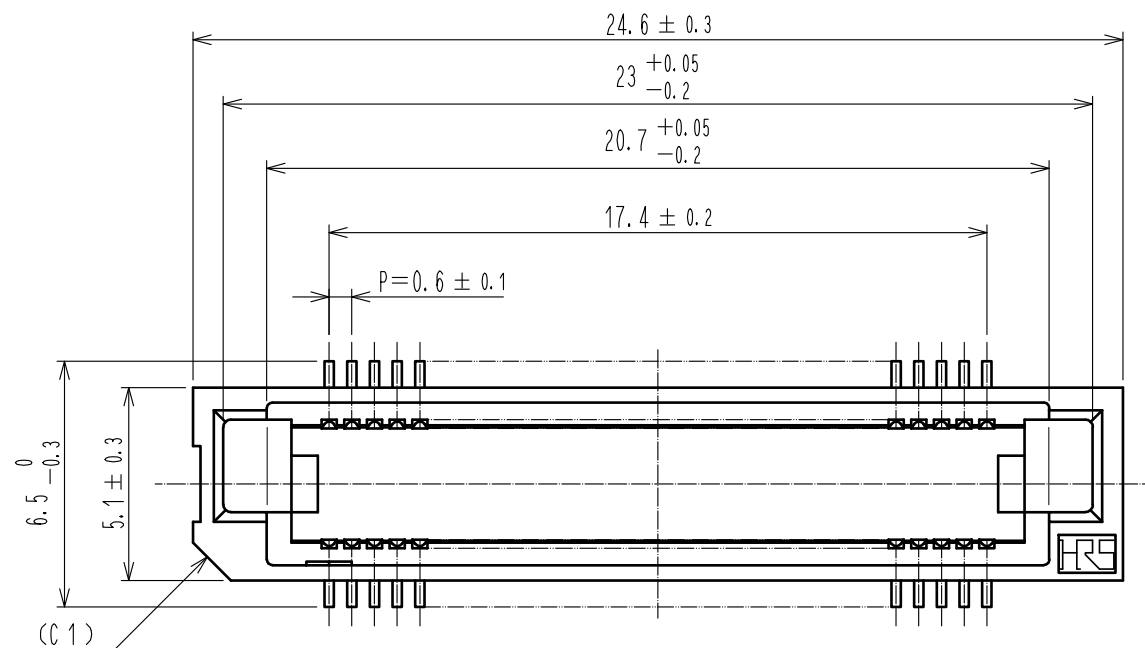
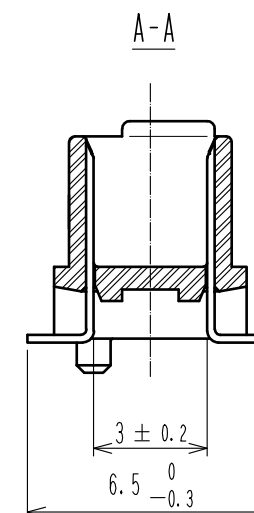


Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

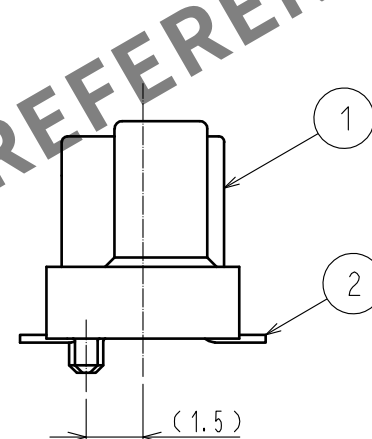

Recommended land pattern dimension of PCB (mounting side) (2:1)

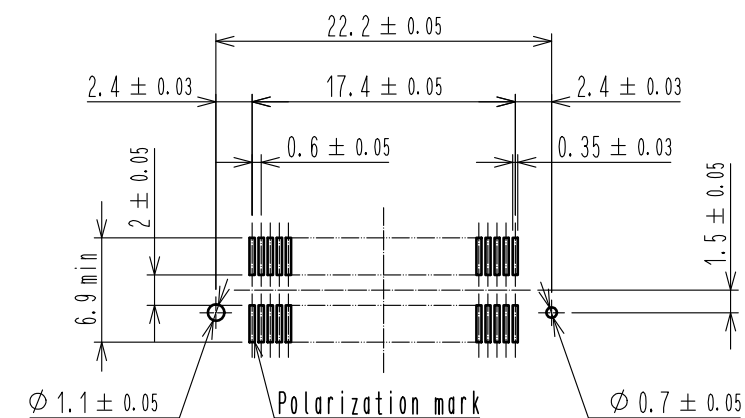

- Notes 1 Lead CO-PLANARITY shall be 0.1mm max.
2 For modification, etc., preventive hole for sink mark may be added according to circumstances.
3 The dimensions in parentheses are for reference.

1		PPS	Light brown (UL94V-0)	2		PHOSPHOR BRONZE	Contact area : Gold 0.1μm min.
NO.		MATERIAL	FINISH . REMARKS	NO.		MATERIAL	Lead area : Tin-plating 1μm min.
							Under plating : Nickel 1μm min.
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED
mm		5 : 1	1	DIS-F-00006414		KS. NAKAJIMA	HT. YAMAGUCHI
HRS		APPROVED : HS. OKAWA	20051216	DRAWING NO.		EDC-150831-71-25	
HIROSE ELECTRIC CO., LTD.		CHECKED : HS. OZAWA	20051216	PART NO.		FX8C-60P-SV1 (71)	
		DESIGNED : KY. NAKAMURA	20051216	CODE NO.		CL578-0521-6-71	
		DRAWN : SY. KAMIGA	20051108				

Added precaution



Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

【Precaution】

When a board with multiple connectors mounted is mated, the connector may be damaged or deformed.
Please divide one side of the board so only one connector is mated per board.

OK

NG

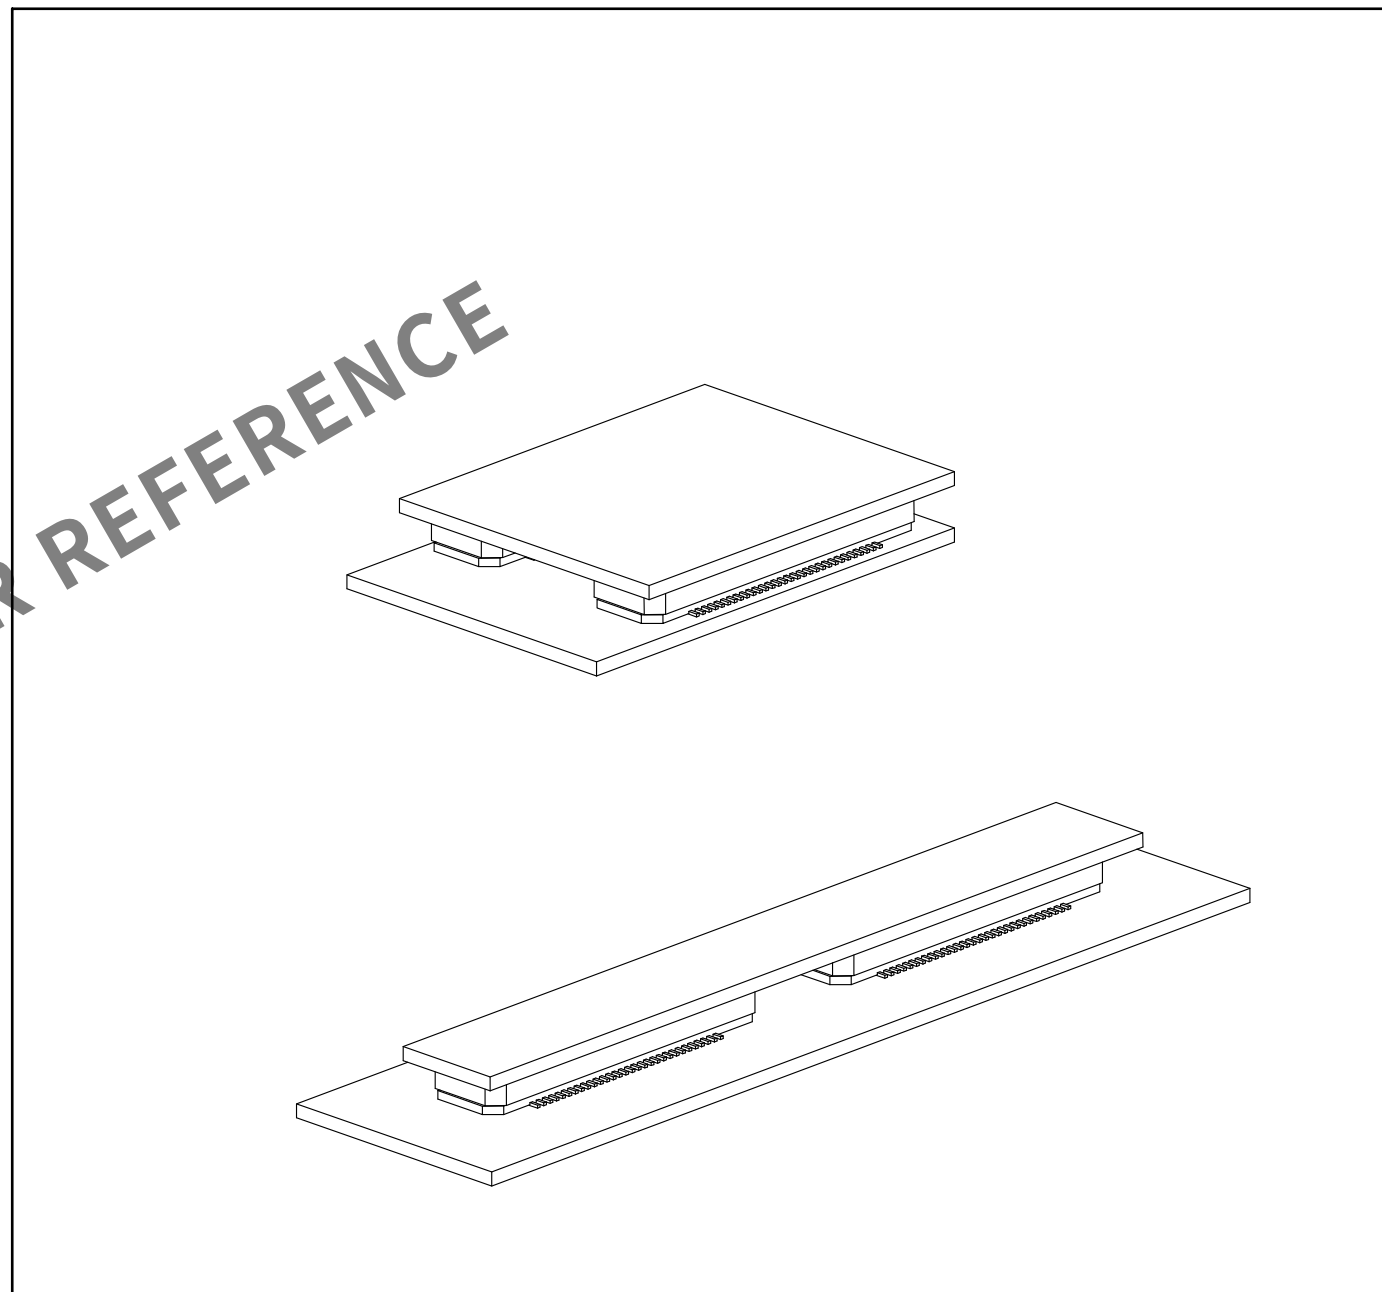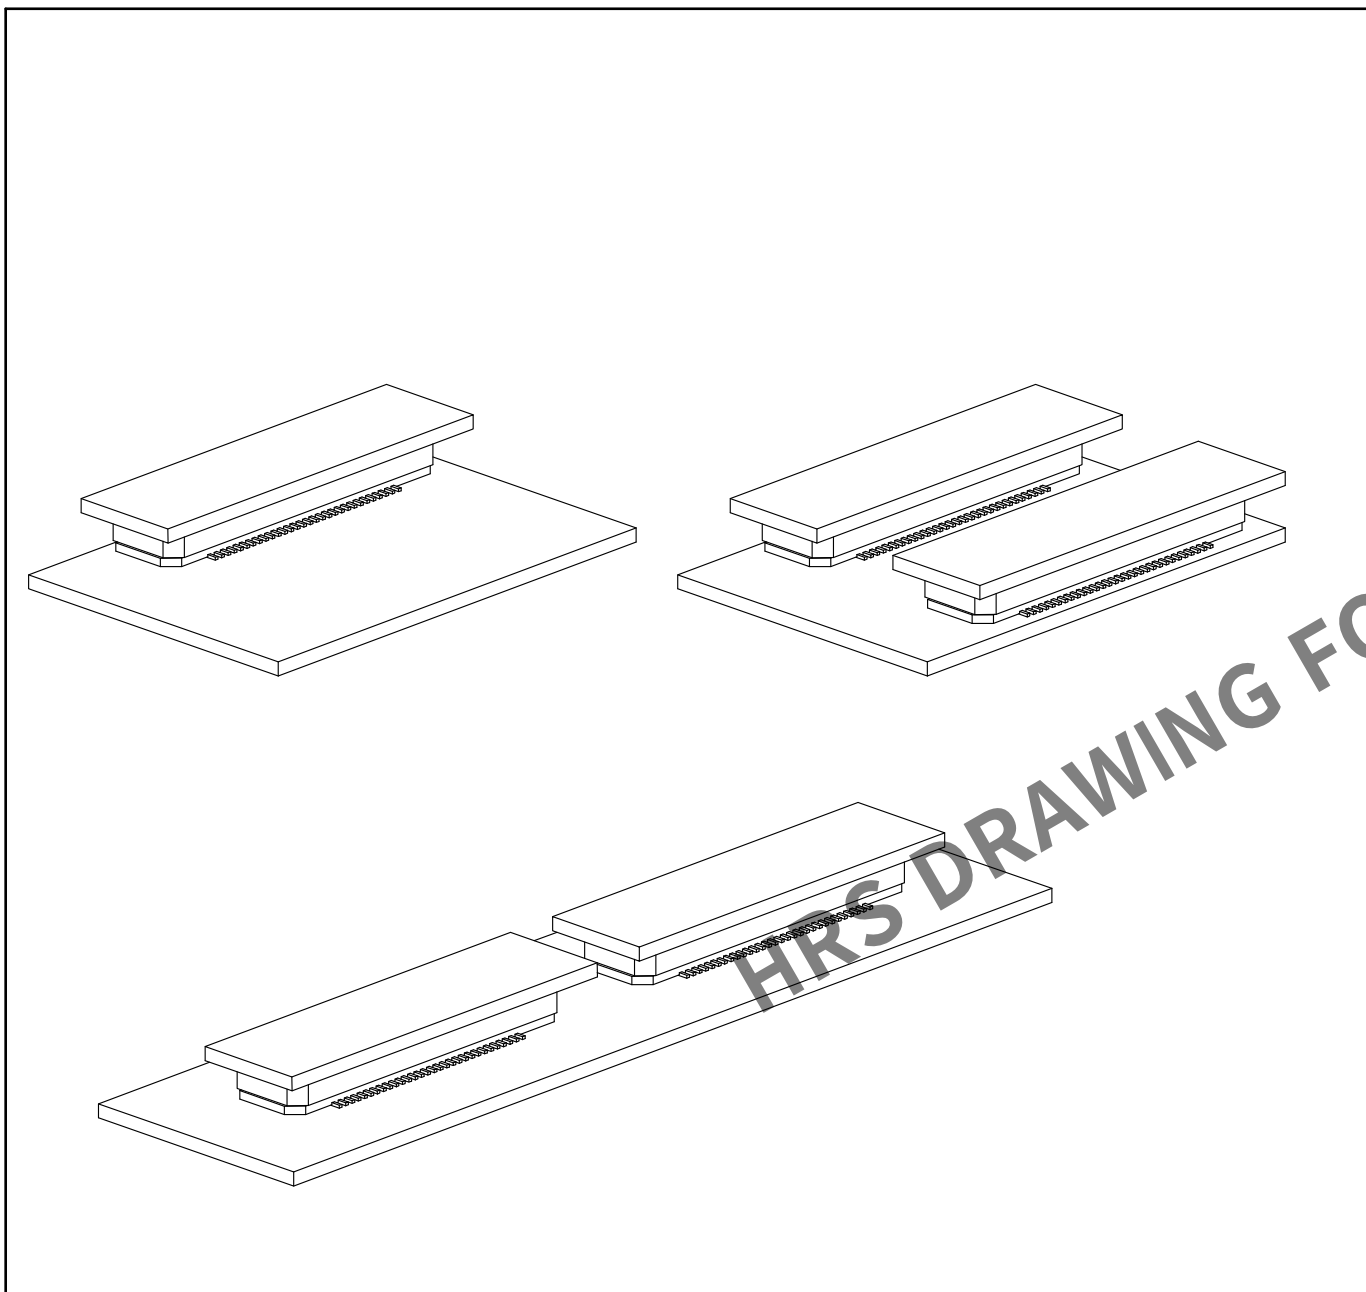

DRAWING NO.	EDC-150831-71-25
PART NO.	FX8C-60P-SV1(71)
CODE NO.	CL578-0521-6-71