

目錄 MAPX	設 變 內 容 MODIFICATION	日 期 DATE
△	側彈變更	2013. 3. 10

NOTES:

Housing: Thermoplastics,UL94V-0

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating:1.5 AMP. 30V AC

Insulation Resistance:1000MΩ Min.

Contact Resistance:30 MΩ Max.

Dielectric Withstanding Voltage:500W AC

Temperature Range:-35℃ to +85℃

Insulator color: Black/White

Plastic material:PBT/LCP/Others

Shell finish:Nickel plated/Tin-Lead plated

Mechanical:

Mating Force:3.5KG MAX

Unmating Force:0.7 KG MIN.

Contact finish:




01:Selective Gold Flash

02:Selective Gold 3U”

03:Selective Gold 5U”

04:Selective Gold 15U”

05:Selective Gold 30U”

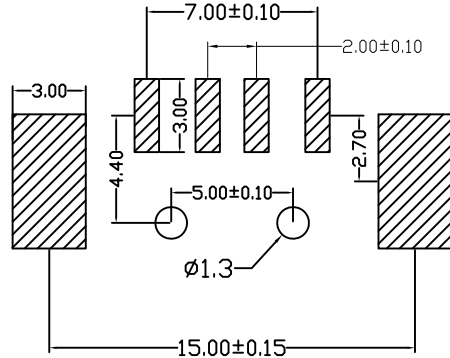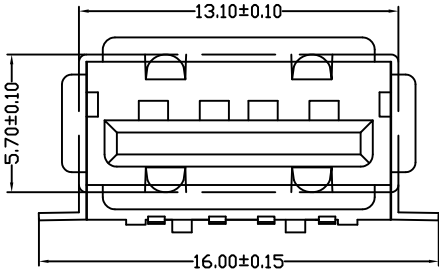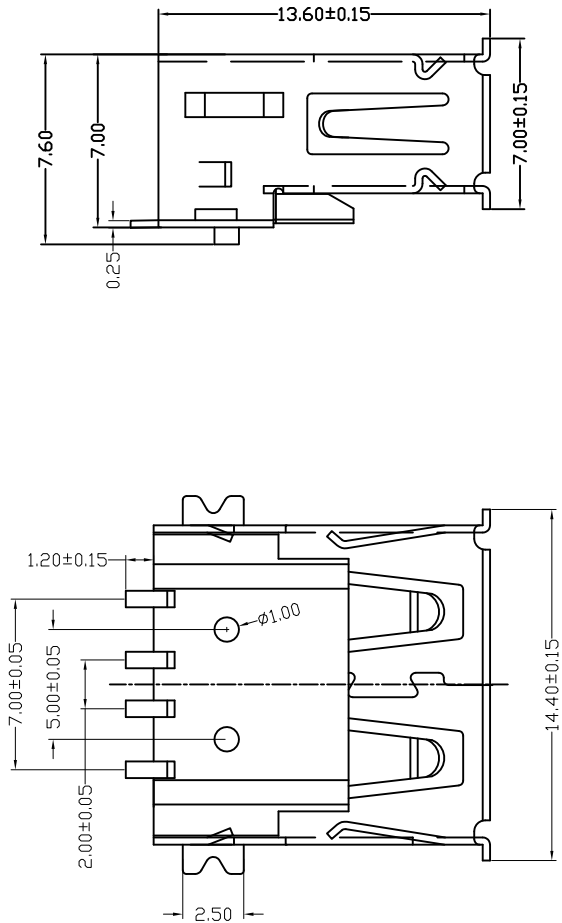

PCB LAYOUT

备注：侧弹分为外弹与内弹

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司							
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PRODUCT PART NO.	904-231B2031S10100		
X.	±0.25	X'.	±5°	比例 SCALE	1:1	审核 CHKD	雷永键	产品名称 PRODUCT NO.	AF鱼叉脚贴板有边内弹铁壳反向LCP本色1.0柱		
.X	±0.20	.X'	±2°								
.XX	±0.15	.XX'	±1°								
.XXX	±0.10	.XXX'	±0.5°	日期 DATE	2009. 10. 20	核准 APPD	雷永键	角法 VIEW		版本 VER	A0