

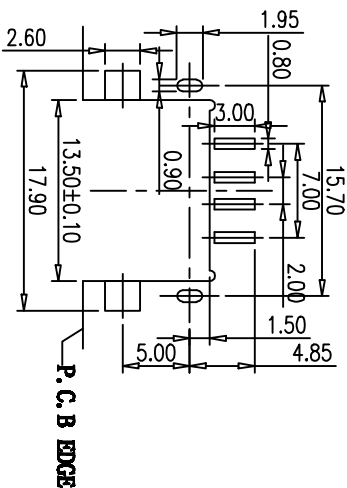


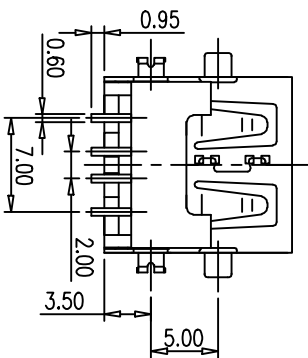




RECOMMENDED P.C.B. PATTERN LAYOUT

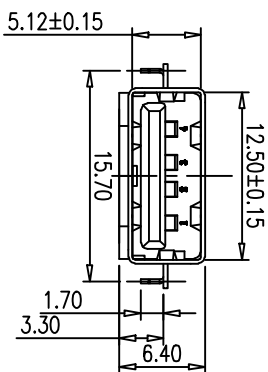

规格说明:Specifications:
电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
2. 端子保持力: Terminal Retention
1.2kgf(MIN)

原材料:Material:

1. 塑胶:Housing:
Hing Temperature Tnermaplastics,
UL 94V-0 PBT White/Black
2. 端子>Contact:Copper Alloy C2680
3. 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

1. 端子>Contact: Plated Gold in Mating Area;
Tin On Solder Talls
2. 外壳:Shell:
Nickel Plating

 深圳市万骏达电子有限公司 http://www.wanjunda.com		图号 (DWG NO)		单位(UNIT): MM
品名 (ITEM NO)	AF破板180度贴片平口	本 (REV)		比例(SCALE)1:1
料号 (PART NO)	USB2.0-AF-CB3.0-SMT-ZB	日期 (DATE)		 未注公差 TOLERANCE UNSPECIFIED X.X ±0.30 X.XX ±0.15 X.XXX ±0.10 X° ±5° X.X° ±2°
型号 (MODEL NO)		设计 (DESIGN)		
		审核 (CHECKED)		
		核准 (APPROVED)		