




Connectors > PCB Connectors > PCB Headers & Receptacles

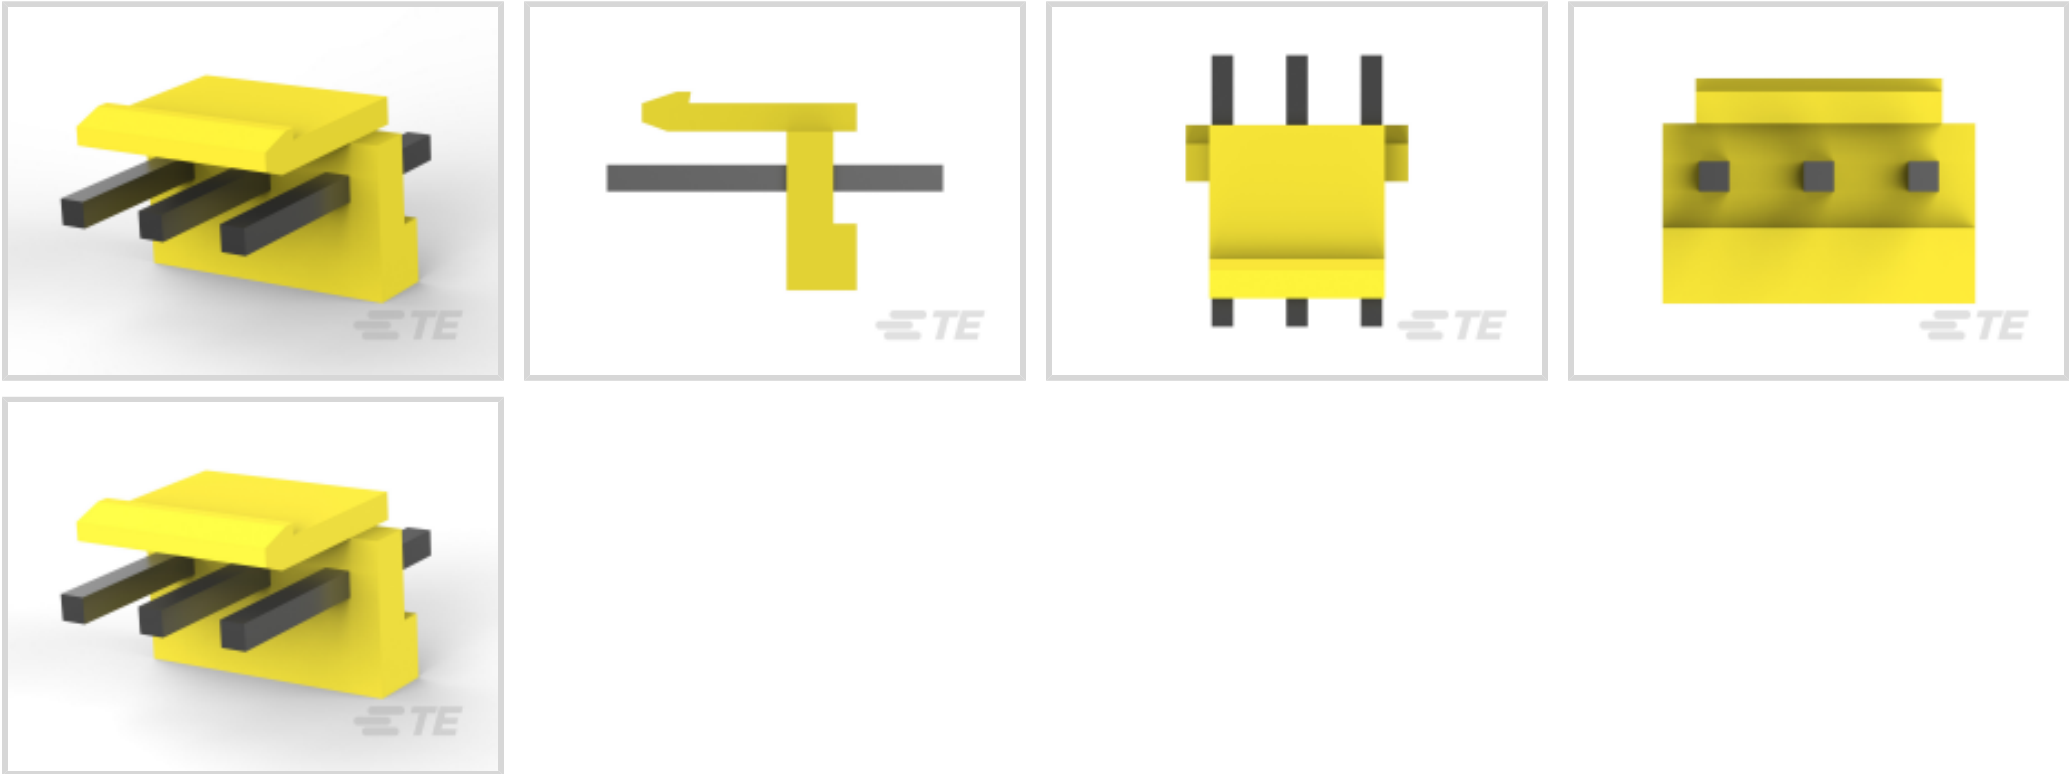

Connector System: **Wire-to-Board**

Number of Positions: **3**

Number of Rows: **1**

Centerline (Pitch): **3.96 mm [.156 in]**

PCB Mount Orientation: **Vertical**

Features

Product Type Features

Connector System	Wire-to-Board
Header Type	Partially Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Header

Configuration Features

Connector Contact Load Condition	Fully Loaded
Number of Positions	3
Number of Rows	1
PCB Mount Orientation	Vertical

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Body Features

Connector Profile	Low
-------------------	-----



Primary Product Color	Yellow
Contact Features	
Contact Mating Area Length	7.7 mm[.3 in]
Mating Square Post Dimension	1.14 mm[.045 in]
PCB Contact Termination Area Plating Material Thickness	1 µm[39.7 µin]
Contact Layout	Inline
Contact Underplating Material Thickness	.8 µm[31.49 – 70.86 µin]
Contact Mating Area Plating Material Thickness	1 µm[39.37 µin]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Square
Contact Mating Area Plating Material Finish	Matte
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Brass
Contact Mating Area Plating Material	Tin
Contact Type	Pin
Contact Current Rating (Max)	7.5 A
Termination Features	
Square Termination Post & Tail Dimension	1.14 mm[.045 in]
Termination Post & Tail Length	3.7 mm[.146 in]
Termination Method to PCB	Through Hole - Solder
Mechanical Attachment	
Mating Alignment Type	Polarization
Mating Retention	With
Mating Retention Type	Latch
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	Without
PCB Mount Retention	Without
Housing Features	
Housing Material	PBT GF
Centerline (Pitch)	3.96 mm[.156 in]



Dimensions

	.465 in
Connector Height	10.7 mm[.421 in]
Connector Width	8.5 mm[.33 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]

Usage Conditions

Operating Temperature Range	-25 – 105 °C[-13 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94HB

Packaging Features

Packaging Quantity	4000
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous



materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 1-1123722-3 3.96 EP PLUG HSG 3P(NATURAL)	TE Part # 1123721-2 ECONOMY POWER CONN REC CONT	TE Part # 1744416-3 3 POS EP II HSG, GLOW WIRE	TE Part # 1123721-1 EP CONN. REC CONTACT
TE Part # 1744493-3 03P EP-II HOUSING, ORANGE	TE Part # 2-1123722-3 3.96 EP PLUG HSG 3P(YELLOW)		

Also in the Series | Economy Power

Connector Contacts(15)	Connector Hardware(2)	Insertion & Extraction Tools(1)	PCB Headers & Receptacles(400)
Rectangular Connector Housings(1)	Rectangular Power Connectors(64)	Wire-to-Board Connector Assemblies & Housings(142)	

Customers Also Bought



TE Part #2-520103-2
ULTRA-FAST 250 ASSEMBLY TAB 22-18 AWG BR

TE Part #1318912-1
EP CONN LP REC

TE Part #1-1123722-2
3.96 EP PLUG HSG 2P(NATURAL)

TE Part #35653
SPLICE,N CE 22-10

TE Part #1-1123722-3
3.96 EP PLUG HSG 3P(NATURAL)

TE Part #4-1123722-3
3.96 EP PLUG HSG 3P(RED)

TE Part #3-520141-2
ULTRAFAST 250 ASSY REC 16-14 TPBR LP

TE Part #470037-000
CWT-9002

TE Part #3-1123723-2
3.96 EP HDR ASSY 2P(BLUE)

TE Part #4-1123723-3
3.96 EP HDR ASSY 3P(RED)

Documents

Product Drawings

3.96 EP HDR ASSY 3P(YELLOW)

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-1123723-3_AD_c-2-1123723-3-ad.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-1123723-3_AD_c-2-1123723-3-ad.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-1123723-3_AD_c-2-1123723-3-ad.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



1-1773885-9 Economy Power Connectors

English

Product Specifications

Application Specification

Japanese

Application Specification

English

Application Specification

English

Instruction Sheets

Instruction Sheet (non U.S.)

Japanese

Economy Power (EP) Connector

Japanese

Agency Approvals

VDE Certificate

English