

#### AMP | Junior Power Timer

TE Internal #: 281810-2


Housing for Male Terminals, Wire-to-Board / Wire-to-Device, 25 Position, 5 mm [.197 in] Centerline, Sealable, Black, Junior Power

Timer

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > Timer Connector Housing

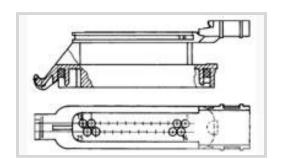

Connector System: Wire-to-Board, Wire-to-Device

Number of Positions: 25

Connector & Housing Type: Housing for Male Terminals

Centerline (Pitch): 5 mm [.197 in]

Sealable: Yes

All Timer Connector Housing (515)

### **Features**

### **Product Type Features**

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Board, Wire-to-Device
Connector & Housing Type	Housing for Male Terminals
Sealable	Yes
Primary Locking Feature	On the Terminal
Configuration Features	
Number of Positions	25
Number of Rows	2
Electrical Characteristics	
Operating Voltage	24 VDC
Nominal Voltage Architecture	12 V, 24 V
Body Features	

90°

Black

**Contact Features** 

Cable Exit Angle

Primary Product Color



Contact Size	2.8mm
Mechanical Attachment	
Terminal Position Assurance	No
Strain Relief	Without
Mating Alignment Type	Polarized
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PA GF
Centerline (Pitch)	5 mm[.197 in]
Dimensions	
Connector Height	39.6 mm[1.559 in]
Product Width	25 mm[.984 in]
Product Length	100.3 mm[3.949 in]
Row-to-Row Spacing	5.6 mm[.22 in]
Usage Conditions	
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C[158 °F][167 °F][176 °F][185 °F][194 °F] [212 °F][221 °F]
Operating Temperature Range	-30 - 105 °C[-22 - 221 °F]
Industry Standards	
Degree of Protection	IP54K
Packaging Features	
Packaging Method	Box
Other	
Serviceable	No
Connector Position Assurance Capable	No

### **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold




EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

### **Compatible Parts**

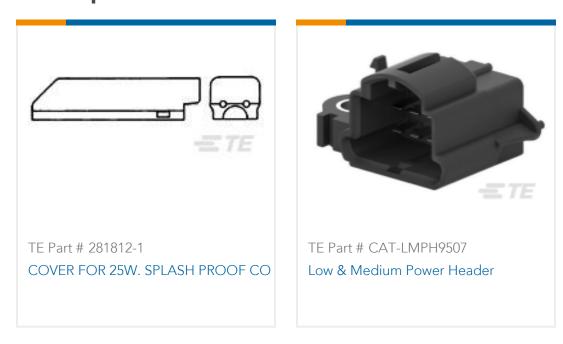

# Also in the Series | Junior Power Timer

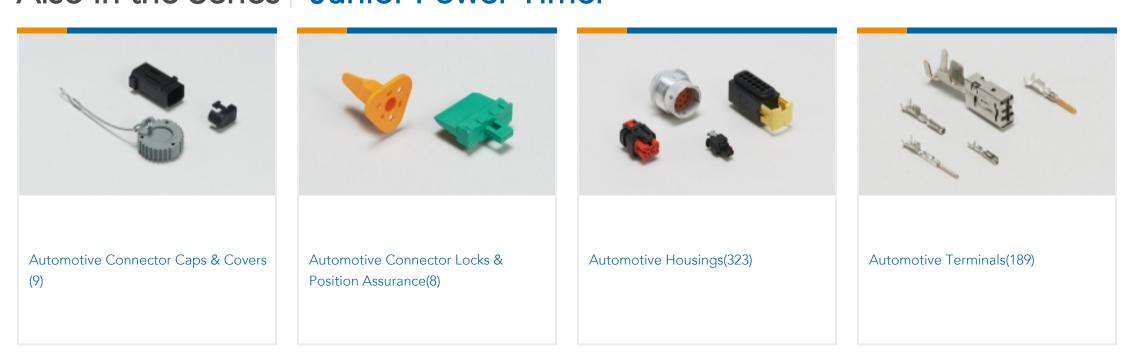





Busbars & Terminals(1)



Connector Seals & Cavity Plugs(9)



Insertion & Extraction Tools(8)



Module Components(1)



Other Automotive Connector Accessories(2)




Special Purpose Terminals(2)

## Customers Also Bought




TE Part #282194-1 SPLASH PROOF CONN. W.S.L.

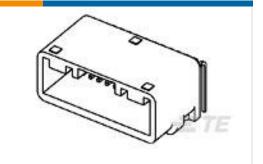


TE Part #1376357-8 025/090 26POS CAP ASSY H SELECTIVE-TIN




TE Part #9-1768016-7 CSL-14033P-9

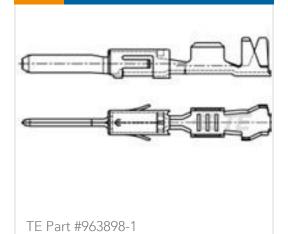

MICRO TIM ST1,6X0,6

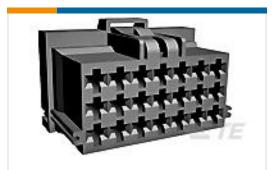

TE Part #9-968975-2 MCP2,8 GEH ASSY 21P

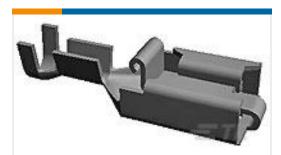

TE Part #341001-1 FASTON 250 REC 13-11 AWG BR LP



TE Part #1534099-1 MQS COVER 2X10P





TE Part #1-963749-2
TAB TAB 1.0-2.5 MM2 SIPPHBZ



TE Part #1418885-3
AMP MCP 1.5K, CONTACT, SWS, (LP)

### **Documents**



### **Product Drawings**

SPLASH PROOF CONN 90 VERS

English

**CAD Files** 

3D PDF

English

**Customer View Model** 

ENG\_CVM\_281810-2\_D.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_281810-2\_D.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_281810-2\_D.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

### **Product Specifications**

**Product Specification** 

English

2-7-15 WAY SPLASE-PROOF CONNECTORS

English