


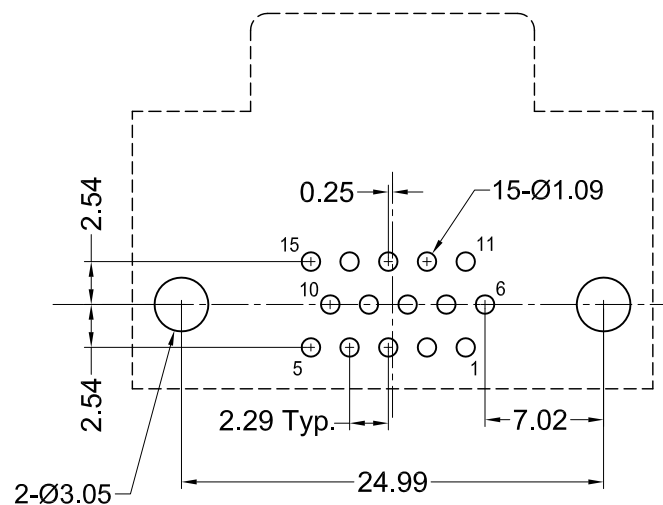

30 Option: 30u" gold on mating end, tin on termination end, nickel underplate on entire contact

Operating Temperature:
-55°C to +75°C

Part Number	Contact Area Plating Finish
KF66X-E15S-NR	Gold Flash (standard)
KF66X-E15S-NR15	15u" Gold (15 option)
KF66X-E15S-NR30	30u" Gold (30 option)

Tolerances
X.X $\pm$ 0.25
X.XX $\pm$ 0.15
Unless Stated Otherwise

