

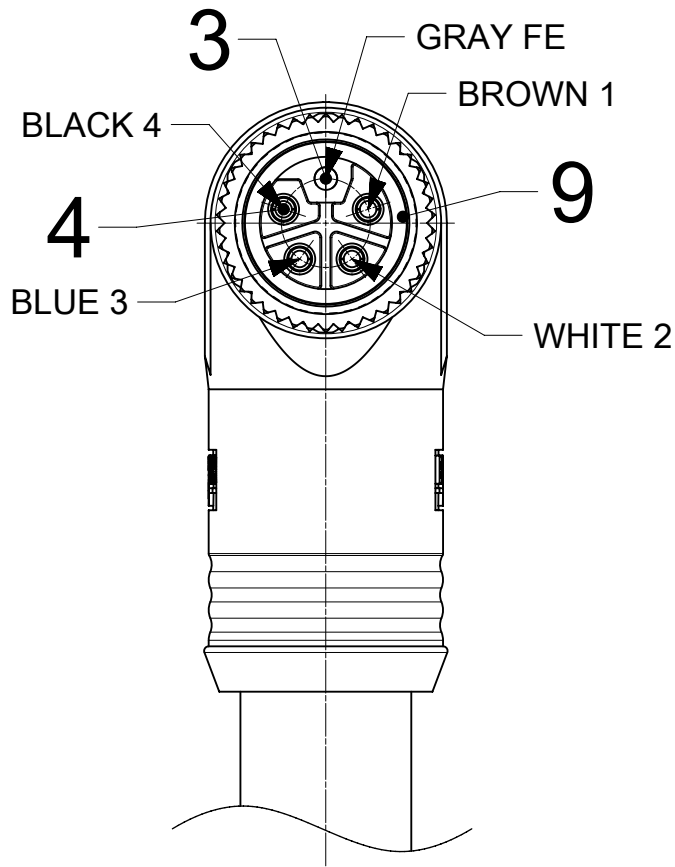
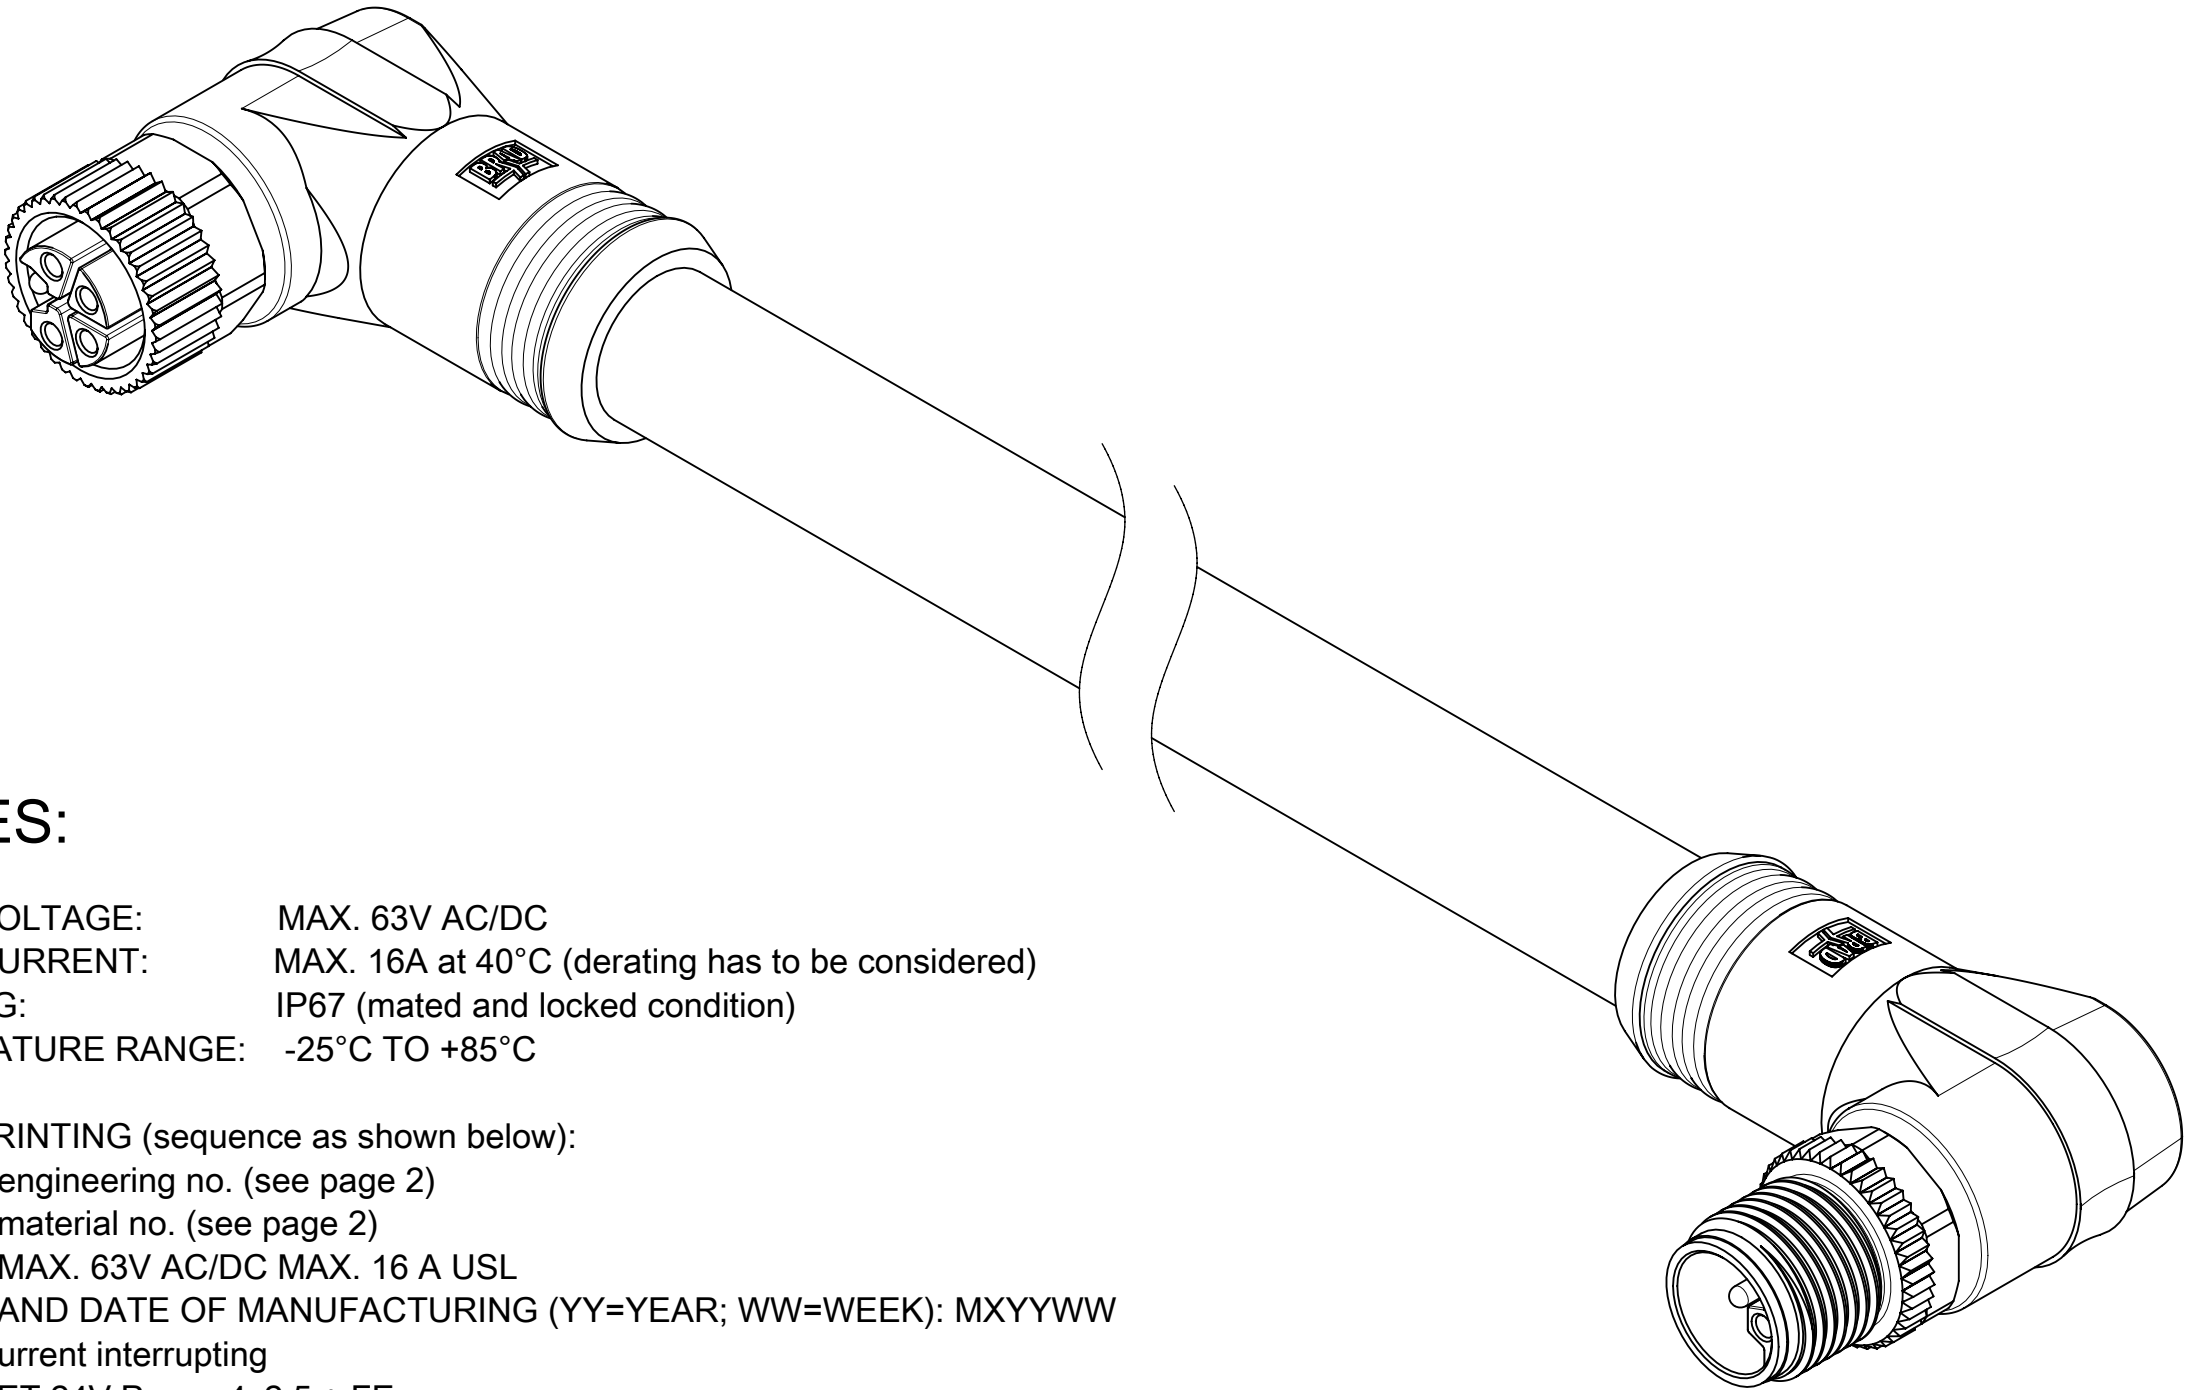


MATING SIDE
FEMALE CONNECTOR

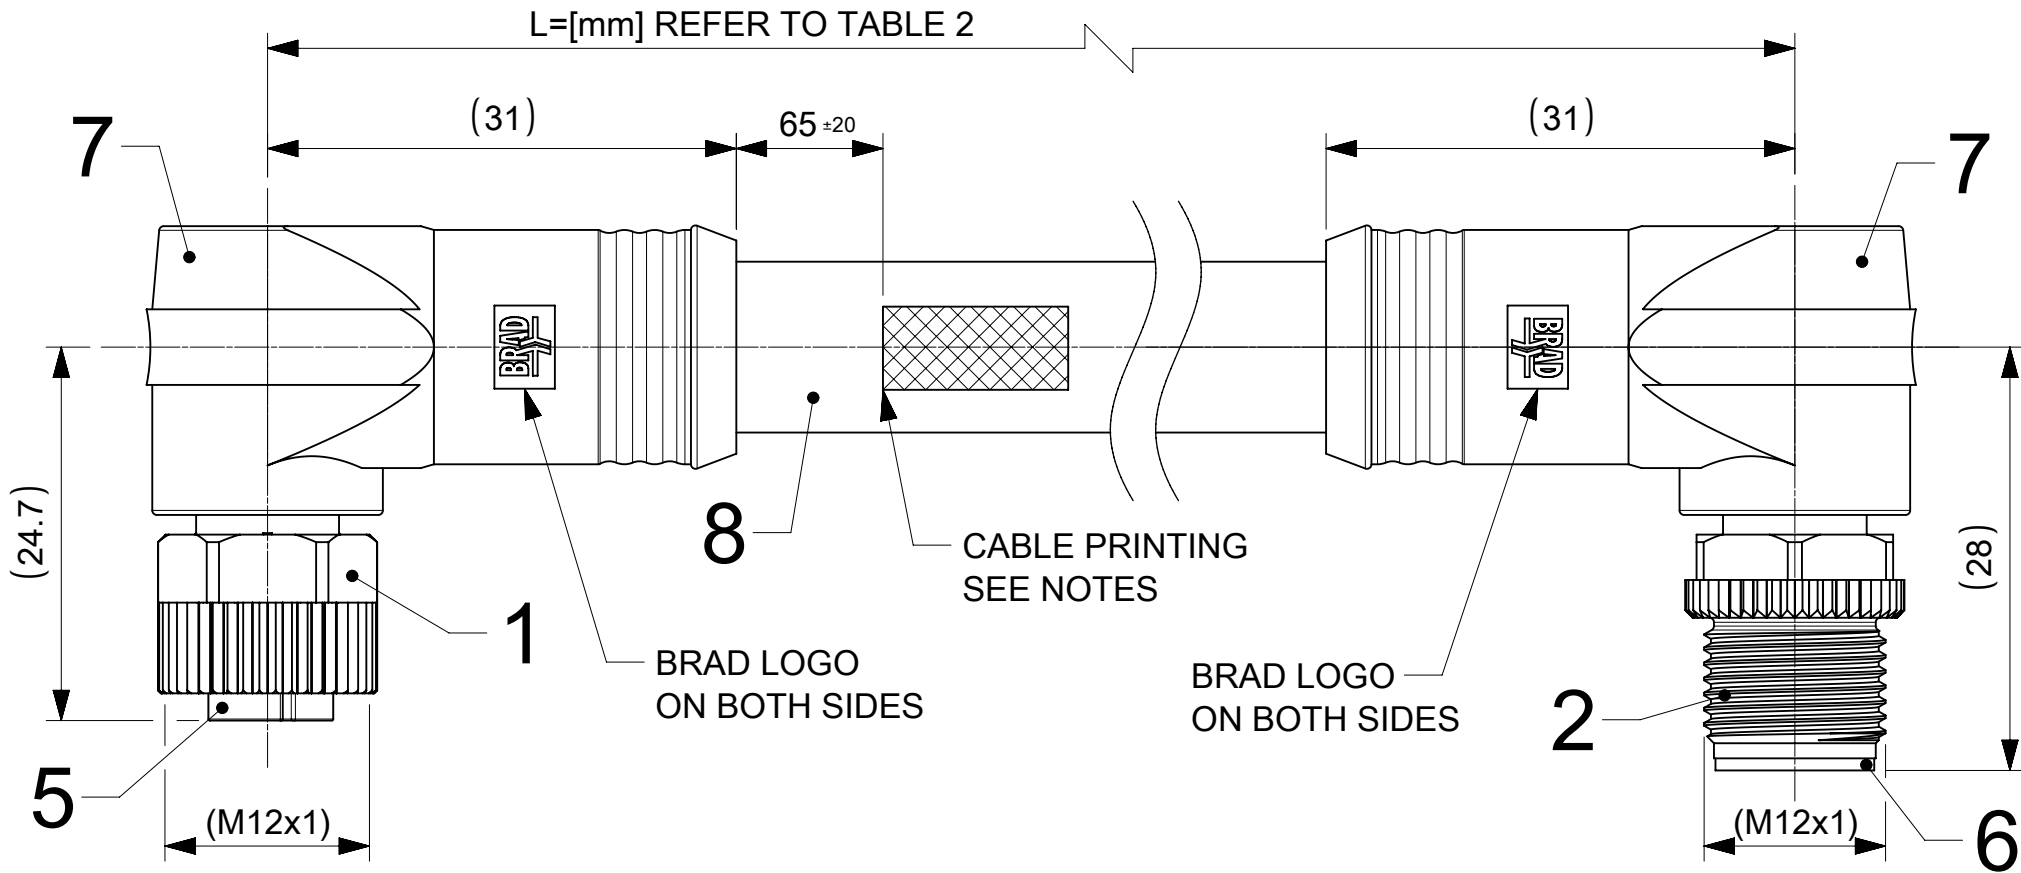

MATING SIDE
MALE CONNECTOR

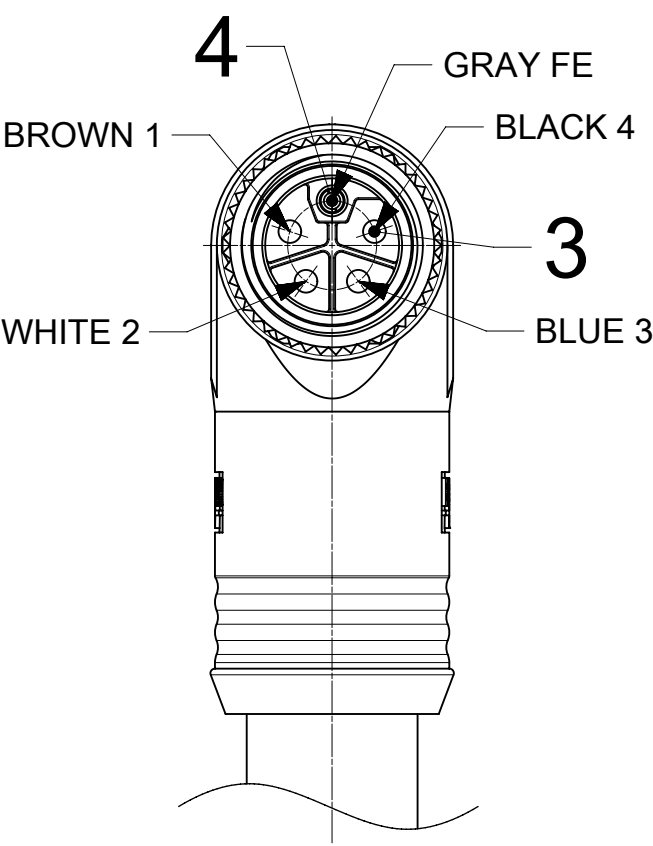

NOTES:

- RATED VOLTAGE: MAX. 63V AC/DC
RATED CURRENT: MAX. 16A at 40°C (derating has to be considered)
IP RATING: IP67 (mated and locked condition)
TEMPERATURE RANGE: -25°C TO +85°C
- CABLE PRINTING (sequence as shown below):
- MOLEX engineering no. (see page 2)
- MOLEX material no. (see page 2)
- MOLEX MAX. 63V AC/DC MAX. 16 A USL
- MOLEX AND DATE OF MANUFACTURING (YY=YEAR; WW=WEEK): MXYWW
- Not for current interrupting
- PROFINET 24V Power 4x2,5 + FE

PART ACCORDING PRODUCT SPEC: 1205010169
PACKAGING ACCORDING PACKAGING SPEC: 1201202000

TABLE 1

POS	DESCRIPTION	MATERIAL	FINISH
1	NUT M12 FE	BRASS	Ni
2	NUT M12 MA	BRASS	Ni
3	CONTACT 15 MA	BRASS	Au
4	CONTACT 15 FE	BRASS	Au
5	INSERT FEMALE	PA	GREY
6	INSERT MALE	PA	GREY
7	OVERMOLD	TPE	BLACK
8	CABLE 5x2.5 D11.3 WSOR	PUR	GREY
9	GASKET OR 8.2X1.25	FKM	BLACK
OPTIONAL 10	ID-CARRIER	-	-

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
FUNCTIONAL SYMBOLS 	DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATED ATTRIBUTE TO GENERAL MARKET IN ECTR		molex CSE M12 5P LC FE RA MA RA WSOR GY XM					
	mm		2:1									
	GENERAL TOLERANCES (UNLESS SPECIFIED)					EC NO: 735577 DRWN: MARUTD 2023/01/12 CHK'D: RSILLER 2023/01/19 APPR: RSILLER 2023/01/19						
	ANGULAR TOL ± 1.0 °											
4 PLACES		±										
3 PLACES		±										
2 PLACES		± 0.05										
DIVISIONAL SYMBOLS	1 PLACE		± 0.3		INITIAL REVISION:							
	0 PLACES		± 0.5		DRWN: FDAFERNER 2020/02/11 APPR: RSILLER 2021/03/15							
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES			
							A2-SIZE		120501			
					DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
					1205010124		PSD		000		A1	
					MATERIAL NUMBER		CUSTOMER			SHEET NUMBER		
					SEE TABLE 2		GENERAL MARKET			1 OF 2		

ENGINEERING NO - NUMERICAL CODE (Available parts see PART LIST table. Other parts available upon request).

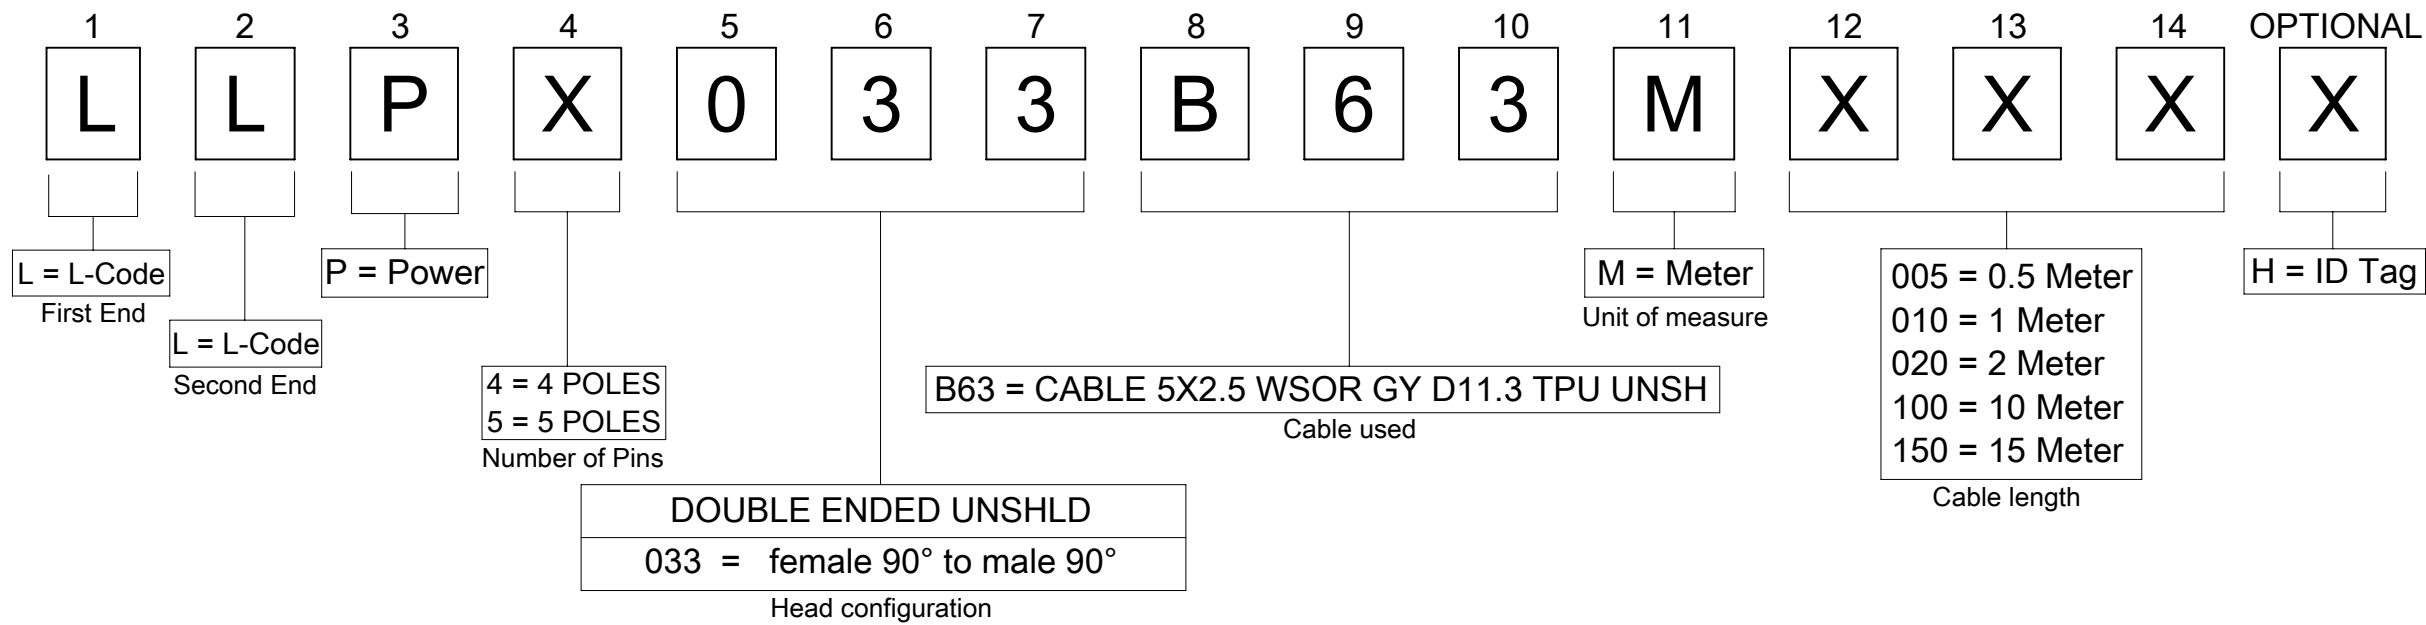



TABLE 2

NOMINAL SECTION 2,5mm²					
MATERIAL NO.		ENGINEERING NO.		L [mm]	TOLERANCE [mm]
1205010124		LLP5033B63M005		500	+40
1205010125		LLP5033B63M010		1000	+40
1205010126		LLP5033B63M020		2000	+60
1205010127		LLP5033B63M030		3000	+60
1205010128		LLP5033B63M050		5000	+60
1205010129		LLP5033B63M100		10000	+80
1205010130		LLP5033B63M150		15000	+140
1205010131		LLP5033B63M200		20000	+140
DOCUMENT STATUS	P1	RELEASE DATE	2023/01/19	11:13:43	

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																		
	DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATED ATTRIBUTE TO GENERAL MARKET IN ECTR				molex										
	mm		1:1																
	GENERAL TOLERANCES (UNLESS SPECIFIED)																		
	ANGULAR TOL ± 1.0°								CSE M12 5P LC FE RA MA RA WSOR GY XM										
	4 PLACES		±																
	3 PLACES		±																
	2 PLACES		± 0.05		EC NO: 735577 DRWN: MARUTD 2023/01/12 CHK'D: RSILLER 2023/01/19 APPR: RSILLER 2023/01/19				PRODUCT CUSTOMER DRAWING										
	1 PLACE		± 0.3																
	0 PLACES		± 0.5																
DIVISIONAL SYMBOLS		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
				A3-SIZE		120501		1205010124		PSD		000		A1					